

SOME OBSERVATIONS ON THE LABRADOR CURRENT
AT SAGLIK, LABRADOR

CENTRE FOR NEWFOUNDLAND STUDIES

**TOTAL OF 10 PAGES ONLY
MAY BE XEROXED**

(Without Author's Permission)

BRENDAN JOSEPH HOLDEN

25555

368120



SOME OBSERVATIONS ON THE LABRADOR CURRENT

AT

SAGLIK, LABRADOR

BY

BRENDAN JOSEPH HOLDEN

A PROJECT

SUBMITTED TO THE COMMITTEE ON

GRADUATE STUDIES IN PARTIAL

FULFILLMENT OF THE REQUIREMENT

FOR THE DEGREE OF

MASTER OF ENGINEERING.

MEMORIAL UNIVERSITY OF NEWFOUNDLAND

ST. JOHN'S, NEWFOUNDLAND

(C)

(C)

BRENDAN JOSEPH HOLDEN

1976

ACKNOWLEDGEMENTS

I wish to express my gratitude to the following:

Dr. J.H. Allen, my Supervisor, for his guidance, Mr. R. Soulis for
his assistance with the spectral analysis, Mrs. H. Tiller and Miss
B. Leitch for typing, Mrs. E. Reminsky for editing.

ABSTRACT

This project describes the processing of S.T.D. and current meter data which was obtained at Saglek, Labrador in August 1972. The current meter records reveal tidal period oscillations in the Labrador Current and two very good records of inertial currents. Ocean densities were calculated from the S.T.D. readings and an attempt was made to calculate current velocity from density differences.

TABLE OF CONTENTS

| | Page |
|---|-----------------|
| INTRODUCTION | 1 |
| CHAPTER I General Description | 2 |
| CHAPTER II Inertial Currents | 10 |
| CHAPTER III Densities | 15 ⁷ |
| CONCLUSIONS | 22 |
| FIGURES | 23-67 |
| BIBLIOGRAPHY | 68 |
| APPENDIX A Chronological Listing of C.S.S. Dawson Activities | 70 |
| APPENDIX B Instrument Specifications | 76 |
| APPENDIX C Contour Mapping Program | 85 |
| APPENDIX D Table of Salinity, Temperature, Depth, Density and σ_t -Values | 98 |

Introduction

The aim of this project is to investigate water movement at Saglek, Labrador in connection with a faculty study of iceberg movement. The data used in this project is salinity, temperature, and depth, (S.T.D.), readings and current meter records which were obtained in August 1972, on the C.S.S. Dawson cruise by Memorial University Engineering Department.

Chapter I gives a general description of the data, (S.T.D. and current meter), and how it was processed. The current meter data is described and the various methods of plotting this data are described and interpreted. The most remarkable items found were tidal period oscillations in the current, and two very good records of inertial currents.

Chapter II gives some basic theory of inertial currents and discusses the oscillation period and radius of inertia of these inertial currents. The observed values were found to agree very well with theoretical values.

Chapter III gives some theory concerning the balance between advection and diffusion of concentrations in the ocean and describes an attempt to calculate current velocity from density differences. A brief comparison is given of salinities at Saglek with those of other studies in the Labrador area.

All the figures in this report are placed at the end of the text and relevant Appendices follow the Bibliography.

CHAPTER I

General Description

The data used in this project was collected on the Memorial University Engineering Department Oceanographic Cruise to Saglek, Labrador in August 1972, aboard the C.S.S. Dawson of the Bedford Institute of Oceanography (B.I.O.). The primary aim of this cruise was to study iceberg movement and possible prediction of iceberg movement from data collected in the area. The cruise schedule is given in Appendix A and the area of the study is shown in Figures 1 and 2. The aim of this project is to process and display some of the data, relating to the Labrador Current, which was collected on this cruise. [1].

During this cruise, salinity, temperature and depth (S.T.D.) readings were taken at all stations shown on Figure 2 with a Bissett-Berman self-recording S.T.D. meter. The specifications of this instrument and a sample of its record are given in Appendix B. Two sets of these S.T.D. readings were taken along the three main East-West traverses; one set on August 11 to August 13, and another set on August 24 to August 26. S.T.D. spot readings were used to calculate the corresponding water densities and σ_t -values, for a regular grid of stations along the three main traverses from stations 1, 10, 23 on the West to stations 9, 18, 31 on the East (See Figure 2).

These densities were calculated by computer employing equation 1.1 below and Knudsen's tables [2].

$$\sigma_t = \sum_t + (\sigma_0 + .1324)(1 - A_t + B_t(\sigma_0 - .1324)) \quad 1.1$$

The terms \sum_t , A_t and B_t are functions of temperature given by

Knudsen [2] and $\sigma_0(S_0 - 1) \times 10^{-3}$, where S_0 is the specific gravity of sea water at 0° Centigrade referred to distilled water at 4°

Centigrade. The calculated term is $\sigma_t = (S_t - 1) \times 10^{-3}$ where S_t is the specific gravity of sea water at t° Centigrade (See Appendix D).

A contour mapping program [3] (See Appendix C) was developed by this writer, and used to draw ocean density (σ_t) contour maps of the area of the three main traverses for both the August 11-13 and the August 24-26 sets of S.T.D. readings. Density contour maps of horizontal cross-sections at the surface and at depths of 10, 20, 30, 50, and 75 meters were drawn by this program (See Figures 3 to 14). Vertical cross-sections were also contoured in this manner and are shown in Figures 15 to 20. These σ_t contour maps are discussed further in Chapter III.

The densities were also used in an attempt to calculate the velocities of the Labrador Current from density changes with respect to distance. This idea is developed and explained further in Chapter III.

Three Braincon Mooring Current Meters were placed at each of the stations A, B, and C and two N.B.A. Current Meters were placed at station D. The Braincon current meters have a savonius rotor with a photographic recording device and the N.B.A. meters have a screw impeller with a magnetic tape recording device. The specifications of these instruments are given in Appendix B. These meters were positioned to record surface, midwater, and bottom currents with the subscripts 1, 2, 3 referring to surface, midwater, and bottom positions respectively. The exact locations and depths of these meters are given in Table 1, and Figure 2.

The Braincon current meter records were read manually from the photographic film by Bedford Institute of Oceanography (B.I.O.) personnel and sent to Memorial University as rolled paper tape records. All Braincon meter records except C2 were returned from B.I.O. These paper tape

| Station | N. Lat. | W. Long. | Water Depth (m) | Inst. Depth (m) | Inst. Serial # | Time Set G.M.T. | Time Recovered G.M.T. | Total Time (Hrs. Min.) |
|----------|---------|----------|--------------------|--------------------|----------------|--------------------|--------------------------|---------------------------|
| Braincon | | | | | | | | |
| C1 | 58.39.4 | 62.01.9 | 176 | 13 | 124 | Aug. 11 1219 | Aug. 25 2047 | 344:28 |
| C2 | 58.39.4 | 62.01.9 | 176 | 75 | 190 | Aug. 11 1227 | Aug. 25 2051 | 344:24 |
| C3 | 58.39.4 | 62.01.9 | 176 | 166 | 90 | Aug. 11 1234 | Aug. 25 2055 | 344:21 |
| B1 | 58.36.8 | 62.09.5 | 146 | 13 | 123 | Aug. 11 1448 | Aug. 25 1954 | 341:06 |
| B2 | 58.36.8 | 62.09.5 | 146 | 75 | 088 | Aug. 11 1453 | Aug. 25 1957 | 341:04 |
| B3 | 58.36.8 | 62.09.5 | 146 | 136 | 058 | Aug. 11 1457 | Aug. 25 2000 | 341:03 |
| A1 | 58.28.2 | 61.57.0 | 165 | 13 | 121 | Aug. 11 1700 | Aug. 25 2352 | 342:52 |
| A2 | 58.28.2 | 61.57.0 | 165 | 75 | 120 | Aug. 11 1708 | Aug. 25 2347 | 342:39 |
| A3 | 58.28.2 | 61.57.0 | 165 | 155 | 122 | Aug. 11 1713 | Aug. 25 2344 | 342:31 |
| N.B.A. | | | | | | | | |
| D1 | 58.42.7 | 61.53.1 | 183 | 13 | 105 | Aug. 12 1130 | Aug. 25 2205 | 322:35 |
| D2 | 58.42.7 | 61.53.1 | 183 | 75 | 104 | Aug. 12 1130 | Aug. 25 2204 | 322:34 |

DRIFTING SEIP CURRENT METER STUDY

| | | | | | | | | |
|-------------------------|----------|----------|-----|---------|--------|--------------|--------------|------|
| E ₁ (for'd) | 58.18.20 | 62.01.80 | 172 | 30 | Bendix | Aug. 20 2140 | Aug. 20 2308 | 1:28 |
| E ₁ (m'ship) | 58.18.1 | 62.01.80 | 172 | 5 - 125 | & HP | Aug. 20 2140 | Aug. 20 2308 | 1:28 |
| E ₁ (for'd) | 58.18.35 | 62.01.55 | 179 | 30 | | Aug. 21 0816 | Aug. 21 0912 | 0:56 |
| E ₁ (m'ship) | 58.18.35 | 62.01.55 | 179 | 5 - 100 | Bendix | Aug. 21 0816 | Aug. 21 0912 | 0:56 |

TABLE 1: EXACT LOCATIONS AND OPERATION TIMES OF THE CURRENT METERS

records were then transferred, by the Engineering Department's PDP/12 computer, through several steps to ASCII paper tape and to an IBM readable magnetic tape. Since these meter records were read manually and since the photographic film is difficult to interpret precisely, there is a great possibility of errors in this data.

After processing, these Braincon records consisted of five three digit numbers as shown below. These five numbers represent respectively:

089 048 273 000 000

the beginning reading (revolutions), the end reading (revolutions), magnetic direction, tilt of the meter, and degrees of tilt. The last two numbers designating tilt were usually 000 or 001, meaning that the tilt of the meters was insignificant; that is, the meters were near vertical in their moored positions. The fact that the tilt readings were 000 was taken as confirmation that the meters were moored properly in a vertical orientation. The present method of using tilt measures to correct the current meter readings has been disputed and is unreliable [5]. For the above reasons, these current meter readings were not corrected for tilt.

The current speed V in cm/sec for each time interval DT in minutes was calculated by IBM 370 computer using equation 1.2 [5]:

$$V = .4169R + 5.3312 - 3.356e^{-3563R} \quad 1.2$$

$$\text{where } R = \frac{7200(IE - IB)}{360 DT}$$

and IB = beginning reading (revolutions)

IE = end reading (revolutions)

DT = interval between readings (approx. 20 min.)

and a special program developed by the writer for this purpose.

The speed and its corresponding direction was converted to North and East components by this same program.

This program was then modified to call a plotter subroutine package [7]; and velocity and direction in degrees true North were plotted against time for all meters at stations A, B and C (See Figures 21 to 28). The prescribed interval DT of 20 minutes between readings was used in these plots.

From these plots the following points can readily be seen:

1. A significant increase in speed occurred about August 22-23 for surface meters A1 and C1. The data for surface meter B1 did not show such an increase in speed.
2. A circular direction change accompanied these increases in speed. Note also that these events occurred at the same time as a severe low pressure in the study area. This low pressure is explained further in Chapter 2.
3. The speed recording device in both midwater meters A2 and B2 seems to have malfunctioned, since the readings are approximately the same for the whole record.
4. Although all the Braincom meters were set to read at 20 minute intervals, the bottom meter, C3, seems to have stopped 2 days before it was retrieved. It is not known whether the timing device in this meter operated correctly every 20 minutes and the meter stopped 2 days early, or if the timing device operated at 22.81 minute intervals and did operate until its recovery. It is now believed that this meter may have stopped and restarted itself one or more times before its recovery.

5. The meter at B3 behaved similarly to that at C3 as described above but the effect was not so great. Similarly, meter A3 appears to have operated beyond its recovery time or it took readings in 19.57 minute intervals.

The program was again modified to plot current velocities as North and East components. (See Figures 29 to 36). This method of displaying a current velocity vector by components is a standard method in oceanographic work [8]; whereas the previously described plots of speed and direction (Figures 21 to 28) are a simpler method which was found easier to understand and interpret visually. From these component-wise velocity plots the following can be seen:

6. For meters A1 and C1 from August 22 to August 24, the North and East components are about 1/4 period out of phase. This is an indication of an inertial current and is explained further in Chapter 2.

The North and East components were also plotted as a progressive vector diagram (Figures 27 to 44) to show the direction and magnitude of the current at each station with time. Time on these charts is marked at 0000 and 1200 GMT with a + sign and the date is written at 1200 GMT each day from August 12 to August 24. These charts employ a variable recording interval DT as described in 4 and 5 above. These progressive vector diagrams show more vividly the nature of the current at each station.

7. The net current movement for all meter stations is seen to be South and Southwest. The net current velocity components are given on these progressive vector diagrams.

8. The inertial currents of August 22 to August 24 at stations Al and Cl are readily seen from these progressive vector diagrams.

9. The net southward movement of the current has superimposed upon it, small circular loops with a period of oscillation approximately equal to that of the semi-diurnal tide (12.42 hrs.).

These circular loops in the current path were compared with the tide tables and with the partial record of a tide gauge which was installed at Saglek (Figure 45). The times of these loops were found to agree very well with the time of high water slack on both the tide tables and the tide gauge record. This agreement, however, is restricted to the period before the influence of the low pressure system.

A power spectral analysis program (BMD02T)[13] was applied to the current meter data of stations Al, Bl, and Cl. The spectral analysis was first performed on the whole record and the predominant period of oscillation was found to be greater than 13 hours. Because of the profound effect of the storm of August 22, 1972, it was decided to do a separate spectral analysis for the periods before and after the storm. This revealed a tidal oscillation period of about 12.5 hours before the influence of the low pressure system for meters Al, Bl, and Cl. After the storm an oscillation period of about 14 hours was found for meter Al, 14.3 hours for Cl, and Bl had an oscillation period of about 13.3 hours. These results are summarized in Table 2 and the 14 hour inertia period of meters Al and Cl is further explained in Chapter 2.

TABLE 2

Summary of Spectral Analysis Results
for Oscillation Period T in Hours¹

| Current Meter | Whole Record | Before Storm | After Storm |
|------------------|-----------------|-----------------|----------------|
| A1 | 13.3 | 12.5 | 14 |
| B1 | 13 | 12.5 | 13.3 |
| C1 | 13.7 | 12.5 | 14.3 |

The NBA current meter record at station D was not processed with the Braincon records because the NBA data format is not computable with the computer programs used for the Braincon records.

Since the power spectrum is a Fourier transform of the autocovariance function, and in this case is dominated by a single narrow-frequency band; the peak to peak period of the autocovariance function, which was also generated by BMDO2T, can be used to estimate the most significant frequency. The resolution of the autocovariance function is the sample interval of the current records (.33 hrs.) and this determines the accuracy of estimating the peak to peak period. Then the probable error in the periods given in the above table is one half a sample interval or $\pm .17$ hrs.

CHAPTER II

Inertial Currents

The following equations (2.1) and (2.2) represent a balance of coriolis and pressure gradient accelerations in a two dimensional, horizontal, frictionless ocean, [8], [4]:

$$\frac{du}{dt} - 2\omega \sin \phi v = -\frac{1}{\rho} \frac{\partial p}{\partial x} \quad (2.1)$$

$$\frac{dv}{dt} + 2\omega \sin \phi u = -\frac{1}{\rho} \frac{\partial p}{\partial y} \quad (2.2)$$

where u = horizontal velocity in the x direction
 v = horizontal velocity in the y direction
 p = pressure
 ω = angular velocity of the earth
 ϕ = latitude in degrees
 ρ = density of sea water

The pressure gradient term in these equations could be caused by a sudden wind stress [8], causing a slope of the ocean surface, and when the wind stress ceases the pressure gradient becomes zero and equations 2.1 and 2.2 then become:

$$\frac{du}{dt} = 2\omega \sin \phi v \quad (2.3)$$

$$\frac{dv}{dt} = -2\omega \sin \phi u \quad (2.4)$$

These circumstances are suspected to have occurred in the Saglek area about August 22, 1972 after a severe low pressure system in that area. The passage of this low resulted in a drop in barometric pressure from 1007.7 mb

to 980.2 mb., and a wind velocity of 50 knots at 270° [9]. This 27 mb. drop in barometric pressure would theoretically result in an elevation of the ocean surface of approximately 27 cm. [8]. The pressure gradient in this case could have resulted from wind stress, surface elevation under the low pressure, a density difference or the combined effect of all three of these [10].

Equations 2.3 and 2.4 represent a balance between particle acceleration and coriolis acceleration and the resulting current is an inertia of velocity $c = \sqrt{u^2 + v^2}$. Solving equations 2.3 and 2.4 simultaneously by addition we get,

$$u \frac{du}{dt} + v \frac{dv}{dt} = 0 \quad 2.5$$

and since

$$\frac{d}{dt} c^2 = \frac{d}{dt} (u^2 + v^2) = 2u \frac{du}{dt} + 2v \frac{dv}{dt}$$

equation 2.5 becomes, $\frac{1}{2} \frac{d}{dt} c^2 = 0$.

This means that the speed c of a water particle is constant. The acceleration results from a direction change and not a speed change.

Solving equations 2.3 and 2.4 simultaneously by subtraction we get:

$$v \frac{du}{dt} - u \frac{dv}{dt} = 2\omega \sin \phi (u^2 + v^2) \quad 2.6$$

and since

$$\frac{d}{dt} \left(\frac{u}{v} \right) = \frac{\left(v \frac{du}{dt} \right) - \left(u \frac{dv}{dt} \right)}{v^2}$$

equation 2.6 becomes

$$\frac{v^2 d \left(\frac{u}{v} \right)}{dt} = 2\omega \sin \phi c^2 \quad 2.7$$

Now if α is the angle between the x-axis and the current direction then,

$$\cot \alpha = \frac{u}{v}, \quad v = c \sin \alpha$$

and substituting these into equation 2.7 and differentiating we get;

$$\frac{da}{dt} = 2\omega \sin \phi$$

This equation shows that the inertia current changes direction at a constant rate for any given latitude.

The above explanation shows that a water particle in an inertia current moves in a circle at a constant speed. This circle is clockwise in the Northern Hemisphere and a counter-clockwise in the Southern Hemisphere.

The period T of an inertial circle of radius r is given by

$$T = \frac{2\pi r}{c} \quad 2.8$$

Since the coriolis acceleration is balanced by the centrifugal acceleration, $\frac{c^2}{r}$, that is since $\frac{c^2}{r} = 2\omega \sin \phi c$, then

$$r = \frac{c}{2\omega \sin \phi} \quad 2.9$$

and equation 2.8 can be written as;

$$T = \frac{\pi}{\omega \sin \phi} \quad 2.8a$$

At Saglek, Labrador, latitude $58^{\circ} 30' N$, the inertia period T is given by equation 2.8a as follows:

$$\begin{aligned} T &= \frac{\pi}{\omega \sin 58^{\circ} 30'} \\ &= \frac{3.1416}{\frac{3.1416}{12} (.8526)} \\ &= 14.07 \text{ hours.} \end{aligned}$$

The oscillation period for surface current meters was calculated on computer by a spectral analysis program and found to be approximately 14 hours for meter stations A1 and C1 for the period August 21 to August 24, 1972 (See Table 2). It can also be seen from the progressive vector diagrams for A1 (Figure 37) and C1 (Figure 43) that the period is approximately 14 hours. From these diagrams it seems that the clockwise inertial current is superimposed on the Southward motion of the Labrador current.

From the North and East component velocity plots for meter stations A1 (Figure 29) and C1 (Figure 35) it can be seen that there is about a quarter period phase difference for the last 4 days of each record. The ratio of North and East components for meters A1 and C1 is approximately equal to one for the inertial portion of the record.

The above observations were also made by Gustavson and Kullenberg (1933) in the Baltic Sea [8], but these Saglek currents are not so well behaved in their circling paths as the Baltic Sea currents.

The current meter at station B1 (Figure 40) is also a surface meter, but it apparently does not have the inertia circles of meters A1 and C1. (See Table 2). The oscillation period at station B1 is about 13.3 hours for the period August 21 to August 24 and this does not agree with the theoretical inertia period of 14.07 hours. Neither does B1 have the latitude of velocity which was observed at stations A1 and C1 on August 22. However B1 does show inertial period influence.

If we take the current velocity c to be approximately 1.2 knots at station C1 on August 22, we get the radius of inertia by equation 2.9 as follows:

$$\begin{aligned}
 r &= \frac{c}{2\omega \sin \phi} \\
 &= \frac{6(1.2)}{\pi \sin 58^{\circ}30'} \\
 &= 2.69 \text{ nautical miles.}
 \end{aligned}$$

This calculated radius of inertia compares very well with the observed radius of inertia on the progressive vector diagram figure 43. From the progressive vector diagram for station A1 (figure 37) the radius of inertia seems to be about 2.2 nautical miles and this agrees well with the calculated value of 2.24 nautical miles, using a current velocity of 1 knot.

It is concluded then that the current oscillations after the storm at Saglek were certainly inertial, with a period of oscillation very close to the theoretical inertia period of 14.07 hours for that latitude. The radius of inertia of these currents is in agreement with their velocities and the general characteristics of these inertia currents are similar to those outlined by Webster [10]. However, it is not known why meter C1 had an inertial period slightly above the theoretical inertia period. The period of B1 was influenced by inertial currents but not to such an extent as to completely dominate the tidal period of 12.42 hours. This phenomena at B1 is discussed with respect to densities in Chapter III.

Russell [14] also observed inertial currents, in June 1971, farther south in the Labrador current about 200 miles North of St. John's at Latitude $50^{\circ}30'$ North and Longitude $52^{\circ}30'$ West. At this latitude the theoretical inertial period is 15.5 hours and Russell observed rotary currents with periods of 15.2, 15.8 and 15.3 hours respectively. These inertial currents however did not have a significant translatory component as did those reported above at Saglek in August 1972.

PAGE 15 MISSING FROM BOOK

PAGE 16 MISSING FROM BOOK

CHAPTER III

Densities

Any scalar s is a function of time t and space location (x, y, z) and hence can be expressed as $s = f(x, y, z, t)$. Then the rate of change of s is given by:

$$\frac{ds}{dt} = \frac{\partial s}{\partial t} + \frac{\partial s}{\partial x} V_x + \frac{\partial s}{\partial y} V_y + \frac{\partial s}{\partial z} V_z . \quad 3.1$$

Equation 3.1 is further expanded to yield

$$\begin{aligned} \frac{\partial s}{\partial t} &= \frac{\partial}{\partial x} \left(\frac{Ax}{\rho} \frac{\partial s}{\partial x} \right) + \frac{\partial}{\partial y} \left(\frac{Ay}{\rho} \frac{\partial s}{\partial y} \right) + \frac{\partial}{\partial z} \left(\frac{Az}{\rho} \frac{\partial s}{\partial z} \right) \\ &\quad - \left(V_x \frac{\partial s}{\partial x} + V_y \frac{\partial s}{\partial y} + V_z \frac{\partial s}{\partial z} \right) \end{aligned} \quad 3.2$$

where V_x, V_y, V_z are the velocity components; Ax, Ay, Az are the coefficients of eddy diffusivity; and ρ is the density. [6].

This equation represents the local time change of concentration as the effect of diffusion minus the effect of advection.

Now let the scalar s be the density of sea water ρ and let the positive x direction be southward and normal to the middle traverse at Saglek (See Figure 2). Then if the ocean density is to remain constant with time, that is $\frac{\partial s}{\partial t} = \frac{\partial \rho}{\partial t} = 0$, the result of advection must balance that of diffusion. Considering this balance in the x direction only we have;

$$\frac{\partial}{\partial x} \left(\frac{Ax}{\rho} \frac{\partial \rho}{\partial x} \right) = V_x \frac{\partial \rho}{\partial x} \quad 3.3$$

which gives

$$\frac{V_x}{Ax} = \frac{\partial^2 \rho}{\partial x^2} / \left(\frac{\partial \rho}{\partial x} \right) \rho \quad 3.4$$

The expressions $\frac{\partial^2 \rho}{\partial x^2}$ and $\frac{\partial \rho}{\partial x}$ are approximated by

$$\frac{\partial \rho}{\partial x} = \frac{1}{2h} (\rho(x + h) - \rho(x - h)) \quad 3.5$$

and

$$\frac{\partial^2 \rho}{\partial x^2} = \frac{1}{h^2} (\rho(x + h) - 2\rho(x) + \rho(x - h)) \quad 3.6$$

where h is the distance (15 nautical miles) between the traverse lines.

Equation 3.4 was used to calculate values of $\frac{V_x}{Ax}$ for both the sets of densities of August 11-13 and August 24-26. These velocity factors $\frac{V_x}{Ax}$ are given in Tables 3 and 4 respectively and represent a vertical cross section of the Labrador Current along the middle traverse. In these tables a positive value denotes a south flowing current and a negative value denotes a north flowing current.

As was already seen in Chapters 1 and 2, the Current as recorded by current meters was rotating as well as moving south. The above described velocity factors (Tables 3 and 4) can at most represent a net velocity vector. Since the S.T.D. readings were not taken simultaneously but over a period of about 2 days it is not expected that they be representative of the density structure of the ocean in this area. The water volume which was recorded, say, at the middle traverse at one time may have been recorded again at the south traverse sometime later and this is not representative of a density difference between the two locations.

It may also be that the southward advection current may be better approximated by balancing it against the vertical upward diffusion or the cross stream diffusion rather than against the longitudinal diffusion.

STATIONS

| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | Depth Meters |
|--------|--------|--------|--------|--------|--------|--------|--------|-----------------|
| .083 | .016 | -0.156 | -0.057 | -0.030 | 0.069 | -0.163 | -0.033 | 0 M |
| .014 | .024 | -0.918 | 0.025 | -0.027 | -0.039 | -0.003 | -0.130 | 10 M |
| -0.012 | -6.128 | -1.465 | -0.594 | 0.006 | 1.184 | -0.105 | -0.033 | 20 M |
| -0.125 | 5.936 | 0.380 | -0.406 | -0.127 | -0.226 | 0.796 | 0.540 | 30 M |
| -0.130 | 0.286 | -0.130 | 0.014 | -0.032 | 0.151 | 0.030 | -0.000 | 50 M |
| -0.073 | -3.322 | 0.0 | 0.130 | -0.014 | 0.026 | -0.136 | -0.130 | 75 M |

Velocity Factors, (V_x/A_x), at the Middle Traverse.

From S.T.D. readings of August 11-13, 1972 at Saglek.

A positive factor denotes a southward velocity and a negative factor denotes a northward velocity.

The coefficient of eddy diffusivity is not known but the magnitude of these velocity factors should vary directly as the magnitude of the current speed.

TABLE 3

STATIONS

| 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | Depth Meters |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------------|
| 0,158 | -0,210 | 0,285 | 0,226 | -0,413 | -0,377 | -0,505 | -0,144 | -0,133 | 0 M |
| -0,361 | -0,079 | -0,037 | 0,514 | -0,577 | -0,389 | -0,618 | -0,183 | -0,182 | 10 M |
| -0,119 | -0,575 | 0,960 | -0,472 | 0,345 | -0,569 | 2,616 | 0,418 | -0,254 | 20 M |
| -0,014 | 2,570 | 0,233 | -0,136 | 0,407 | 0,707 | 0,454 | 1,269 | -0,165 | 30 M |
| -0,038 | 0,145 | -1,075 | 0,028 | -0,186 | 1,504 | 31,638 | 5,068 | -0,059 | 50 M |
| 0,240 | 0,160 | -0,251 | -0,022 | -0,048 | -0,255 | -0,279 | 3,322 | 5,847 | 75 M |

Velocity Factors, (V_x/A_x) , at the Middle Traverse.

From S.T.D. readings of August 24-26, 1972 at Saglek.

A positive factor denotes a southward velocity and a negative factor denotes a northward velocity.

The coefficient of eddy diffusivity is not known but the magnitude of these velocity factors should vary directly as the magnitude of the current speed.

TABLE 4

There must also be found a more accurate method of obtaining S.T.D. readings; preferably a method which eliminates the need to read the S.T.D. meter record manually.

The densities and σ_t -values which were described previously in this report are given in Appendix D; with station number, depth, and dates on which the data was collected. The six decimal places given in Appendix D for σ_t does not imply precision, but is a result of the computer print-out statement.

From the sigma-t contour maps (Figures 3-20) the following observations were made:

10. The horizontal σ_t contours before the storm (August 11-13) are fairly widely spaced while those after the storm (August 24-26) are more closely spaced at the surface and at depths of 10 and 20 meters. This shows mixing of the surface layers which was a result of the storm.
11. The vertical cross section σ_t contour maps show a marked increase in σ_t values of the surface layer after the storm. This is more apparent for the North and Middle traverses than for the South traverse. This shows that dense water from deeper layers was mixed with the surface layers as a result of the storm passage.
12. A closer look at the horizontal surface contour maps of August 24-26 (Figures 9-10) suggests to some extent why current meter B1 did not have the strong inertial current which was observed at meters A1 and C1. The meters A1 and C1 are close to the circular contour levels with steep σ_t gradients, whereas meter B1 is under the influence of a different contour level with a much weaker σ_t gradient. This indicates that B1 may have

been in a different current stream than Al or Cl.

The salinities and densities recorded at Saglek are much lower than those recorded by Lazier [11] in the Labrador Sea. This is understandable since the Saglek study area is near shore and hence is expected to be more affected by fresh water runoff than the offshore areas. In comparing these Saglek salinities with those of Templeman [12], farther south in the Hamilton Bank area, there is found a slight difference. The salinities recorded by Templeman, are slightly less at the surface than those recorded at Saglek. This implies that the Labrador current is influenced more by fresh water runoff as it moves southward and hence has reduced salinity.

Conclusions

It is concluded that the current at Saglek oscillated with the tidal period of 12.5 hours before the storm of August 22. After the storm the oscillation period was inertial for meter stations A1 and C1. The radius of inertia of these currents compares with their respective locities as the theory predicts they should. Meter station B1 was influenced by the inertial currents but not enough to dominate the tidal oscillation period.

The attempt to calculate current velocity from density differences is not very meaningful. It is suggested that the balance of southward advection with vertical or cross-stream diffusion might be more meaningful. The σ_t contour maps show that the storm resulted in a mixing of the surface layer with deeper layers. These densities recorded at Saglek are lower than those recorded farther offshore and higher than those recorded farther along the Labrador Coast.

The iceberg movement near Saglek is now being studied by Dr. J.T. Dempster and R. Soulis of the Engineering Department at Memorial University.



FIGURE 1: LOCATION OF STUDY AREA


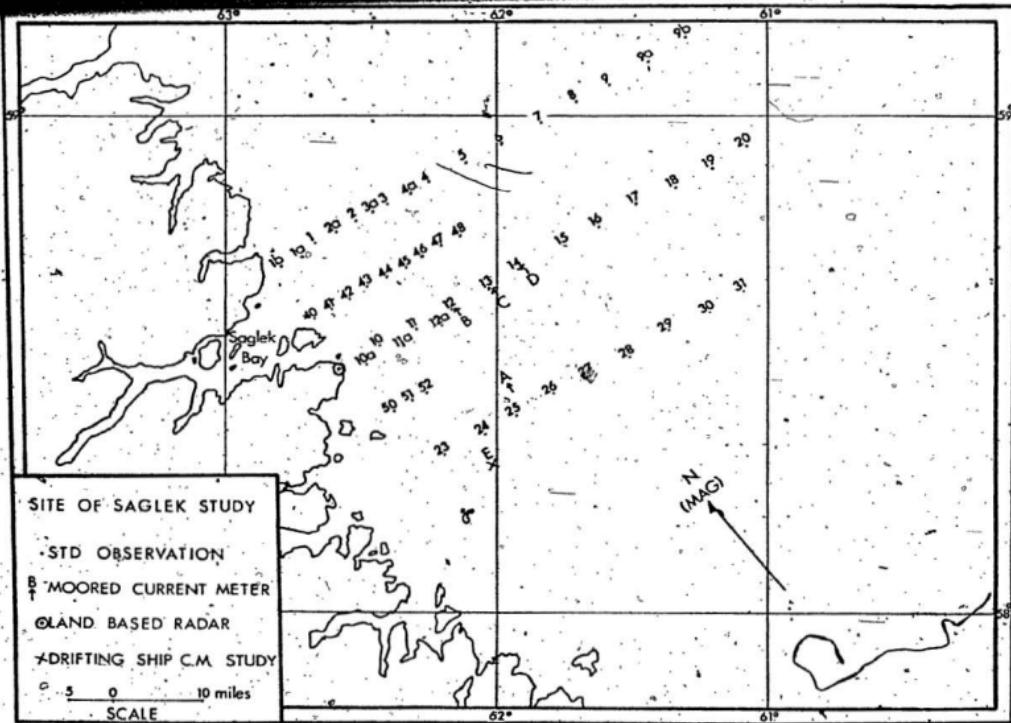


FIGURE 2: LOCATION OF OBSERVATION STATIONS

FIGURE 3
SIGMA-T CONTOUR MAP

Sigma-t Contour Map Saglek, August 11-13, 1972

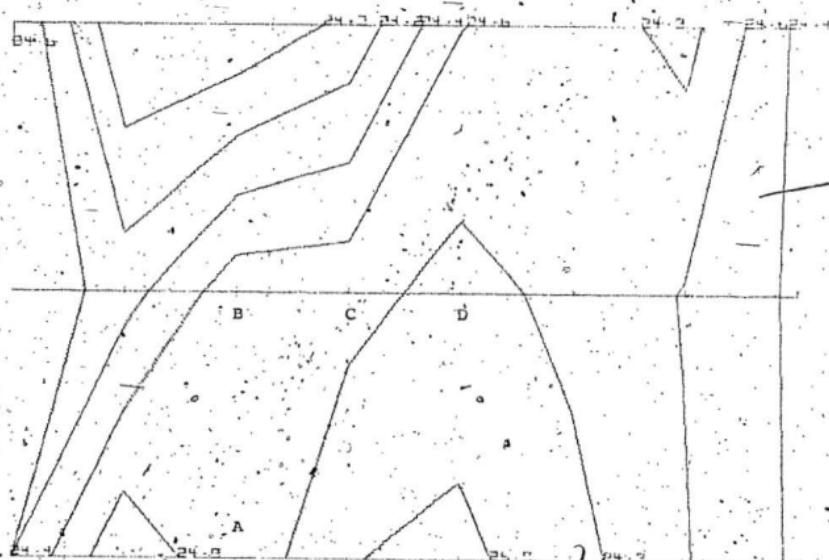


Scale 1 inch equals 6 Nautical Miles

Sigma-t Contour Map Saglek, August 11-13, 1972

NORTH 94°

DEPTH = 10 METERS

FIGURE 4
SAGLEK COASTLINE

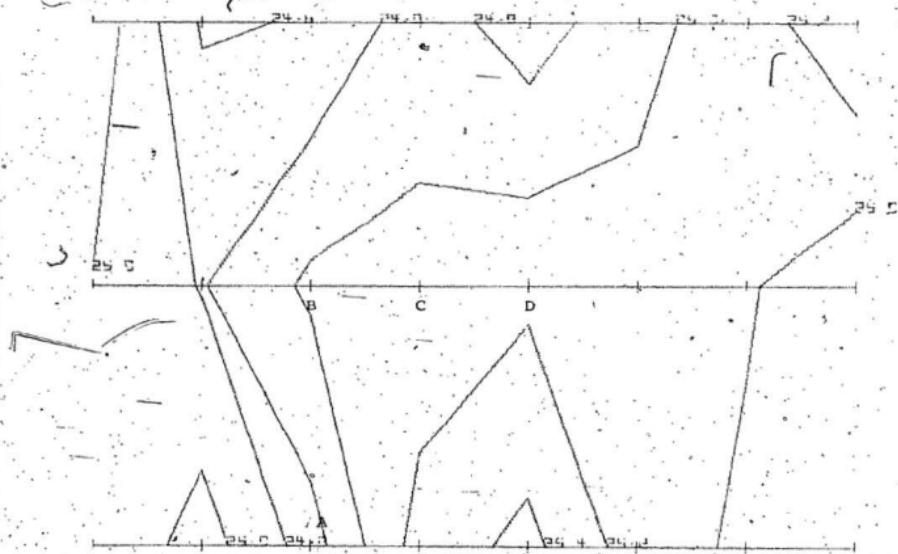


Scale 1 inch equals 6 Nautical Miles

Sigma-t Contour Map Saglek, August 11-13, 1972

NORTH MAG.

DEPTH = 20 METERS

FIGURE 5
GEODETIC COORDINATES

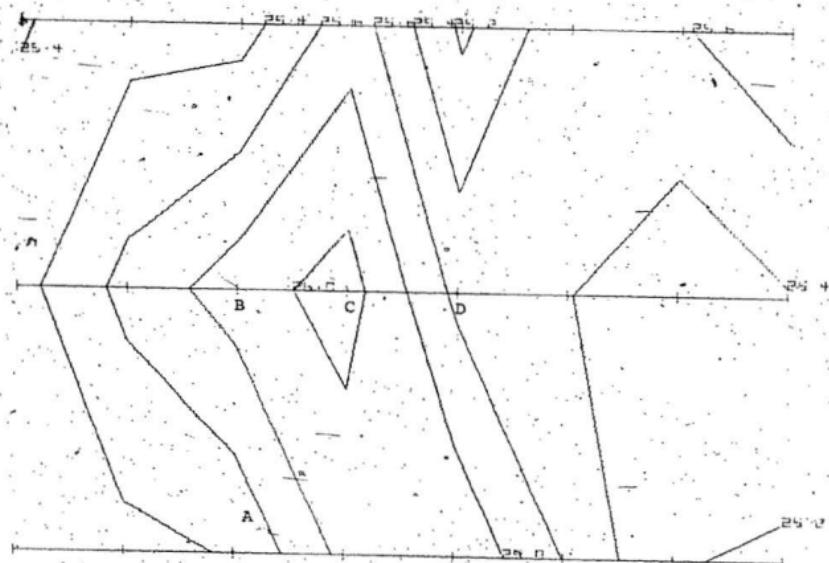

Scale 1 inch equals 6 Nautical Miles


Sigma-t Contour Map Saglek, August 11-13, 1972

NORTH END

DEPTH = 20 METERS

JD MARSHAL
ROD CUT

FIGURE 6

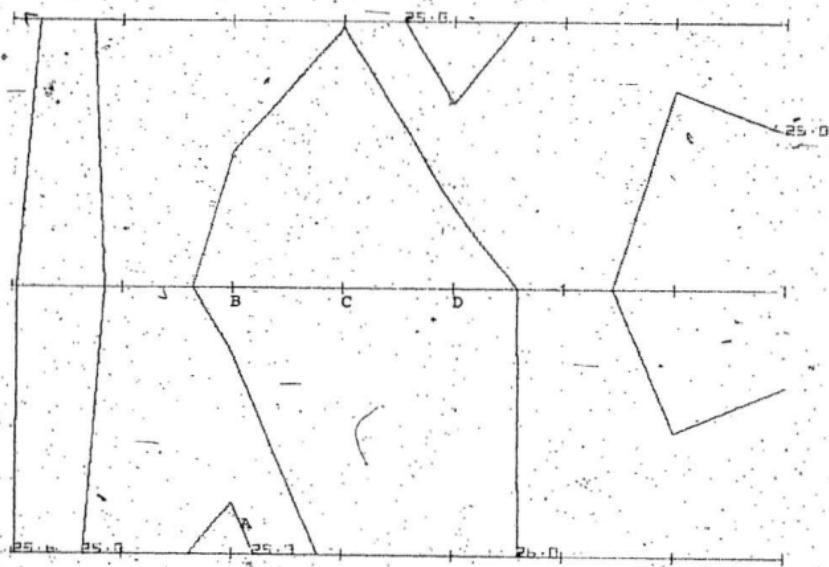


Scale 1 inch equals 6 Nautical Miles

Sigma-t Contour Map Saglek, August 11-13, 1972

NORTH 140° DEPTH = 50 METERS

FIGURE 7
DEPTHDROUD DOCUMENT

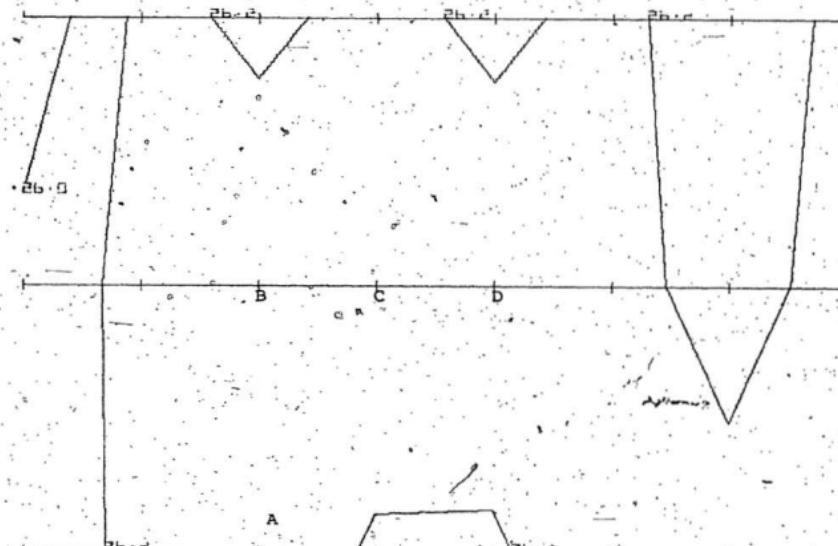


Scale 1 inch equals 6 Nautical Miles

Sigma-t Contour Map Saglek, August 11-13, 1972

NORTH MAG.

DEPTH = 75 METERS

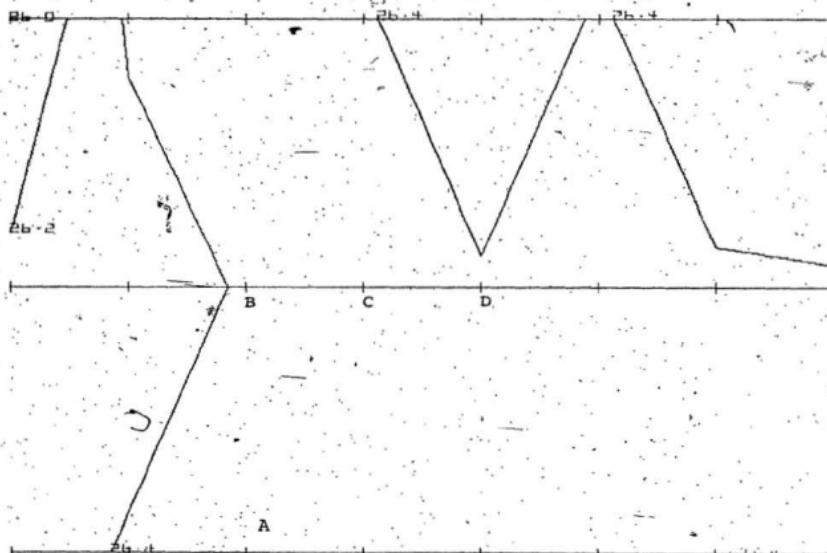


Scale 1 inch equals 6 Nautical Miles

FIGURE 8
SAGLEK SOUND

Sigma-t Contour Map Saglek, August 24-26, 1972


NORTH MAG. / TRUE N. DEPTH = D METERS.

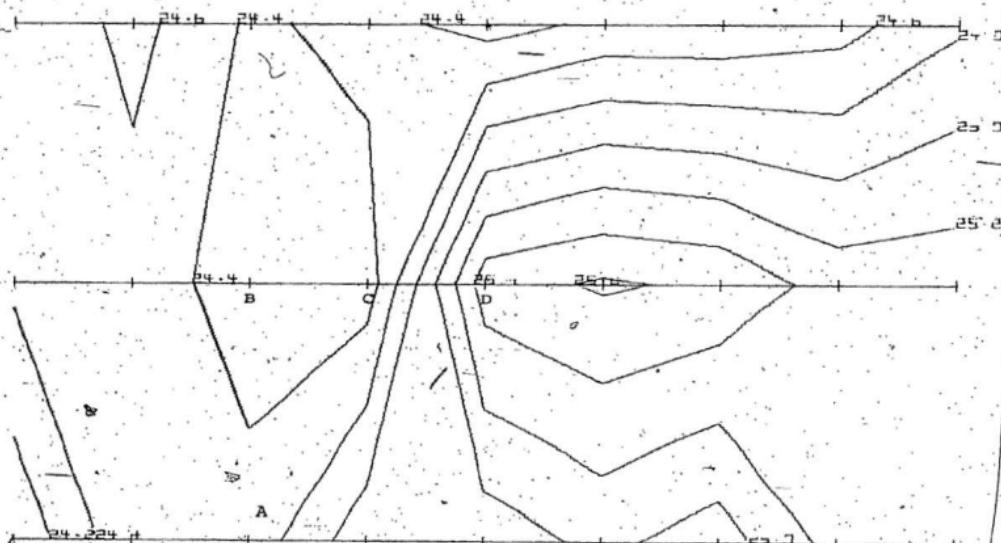

Sigma-t Contour Map Saglek, August 24-26, 1972

NORTH MAG TRUE N DEPTH = 10 MILES

FIGURE 10
SAGLEK SOUND

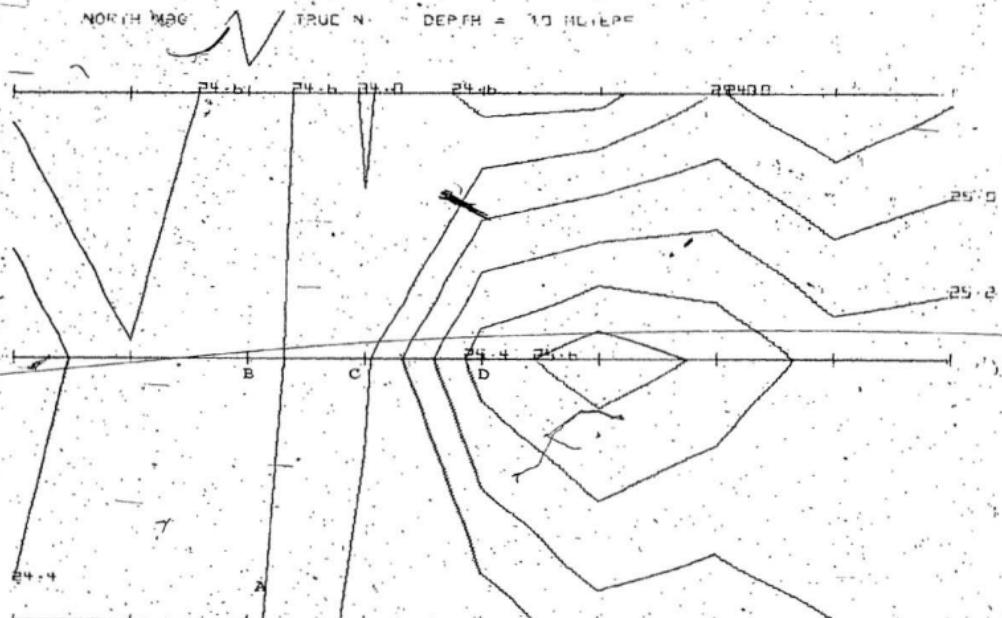


Scale 1 inch equals 6 Nautical Miles.

Sigma-t Contour Map Saglek, August 24-26, 1972

NORTH MAG TRUE N DEPTH = 20 METERS

PLANE 11
HULL DOCK ROADBED

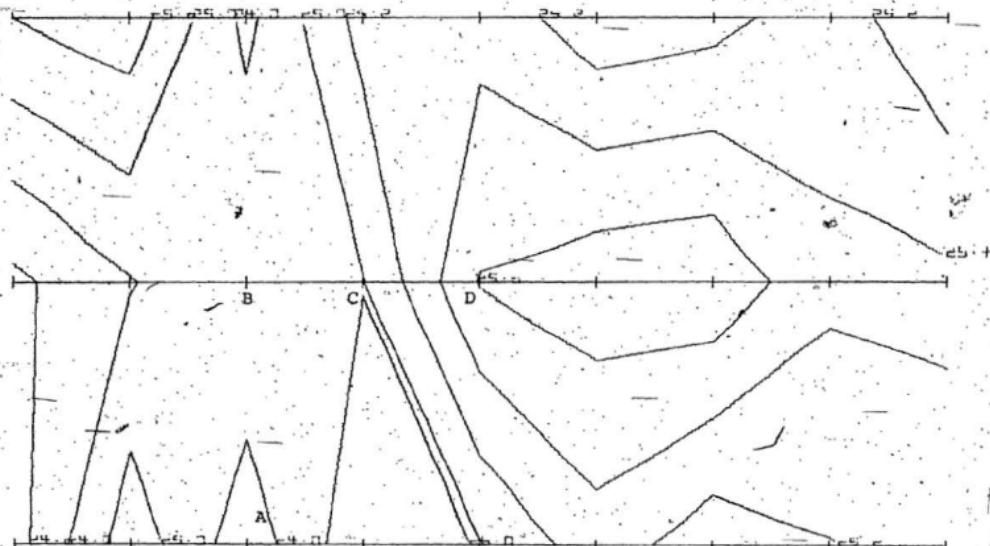

Scale 1 inch equals 6 Nautical Miles


Sigma-t Contour Map Saglek, August 24-26, 1972

NORTH. MAG.

TPOL N.

Depth = 30 Meters

J.C. MAC CANNELL -
FIGURE 12

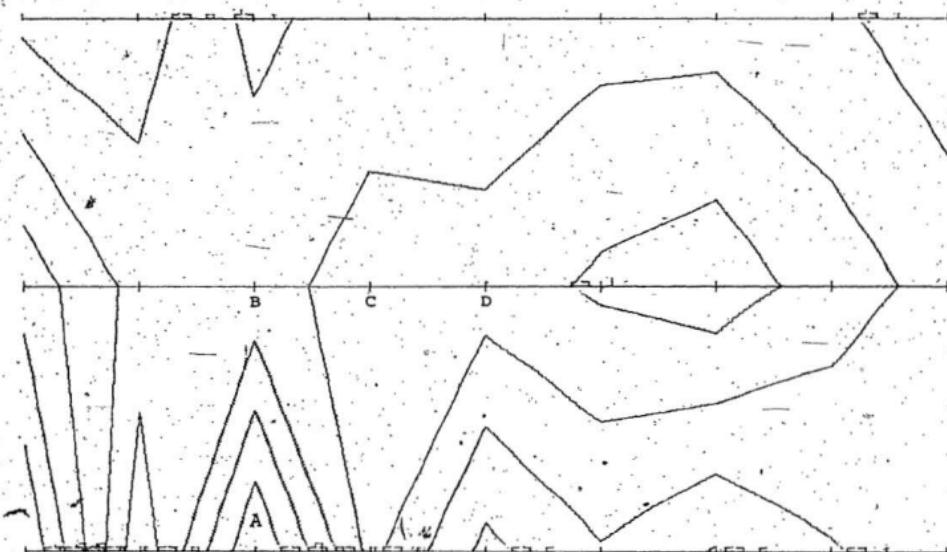

Scale 1 inch equals 6 Nautical Miles

Sigma-~~P~~ Contour Map Saglik, August 24-26, 1972

NORTH: MAG
TRUE N
Depth = 50 Meters


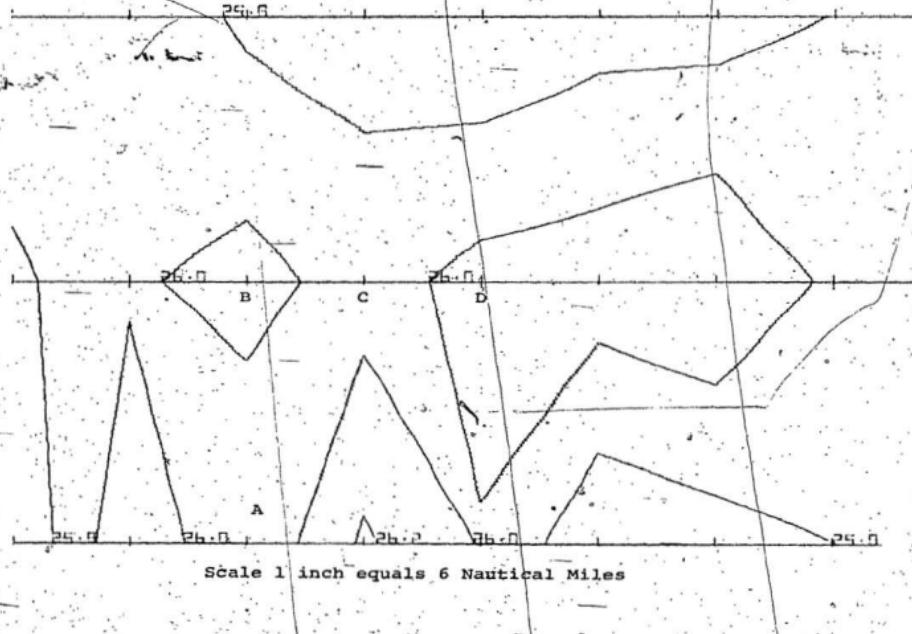



FIGURE 13

Sigma-t Contour Map Saglek, August 24-26, 1972

NORTH MAG. TRUE N. DEPTH = 75 METERS

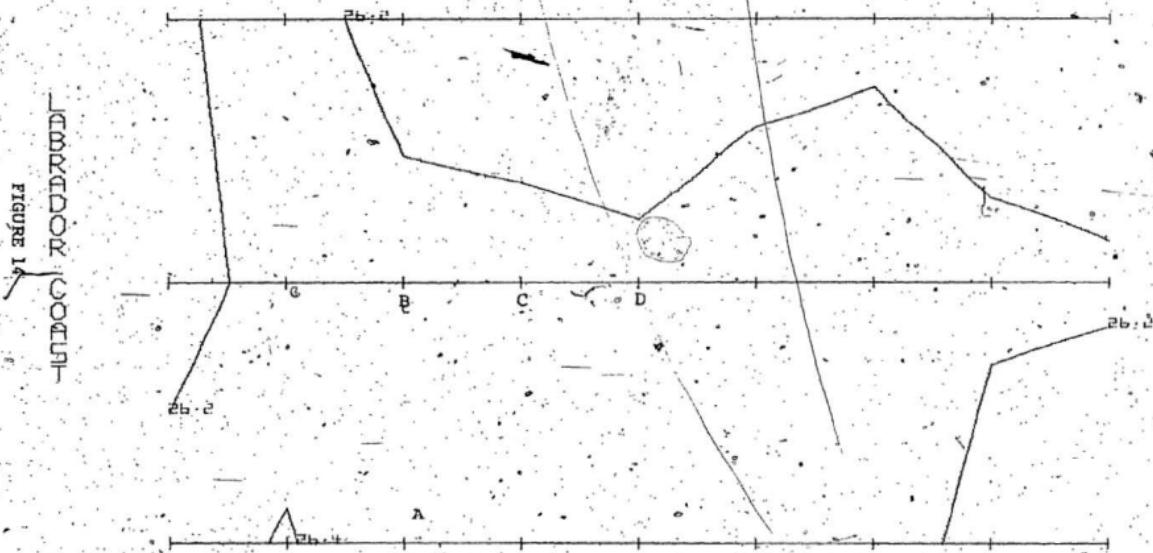

Scale 1 inch equals 6 Nautical Miles

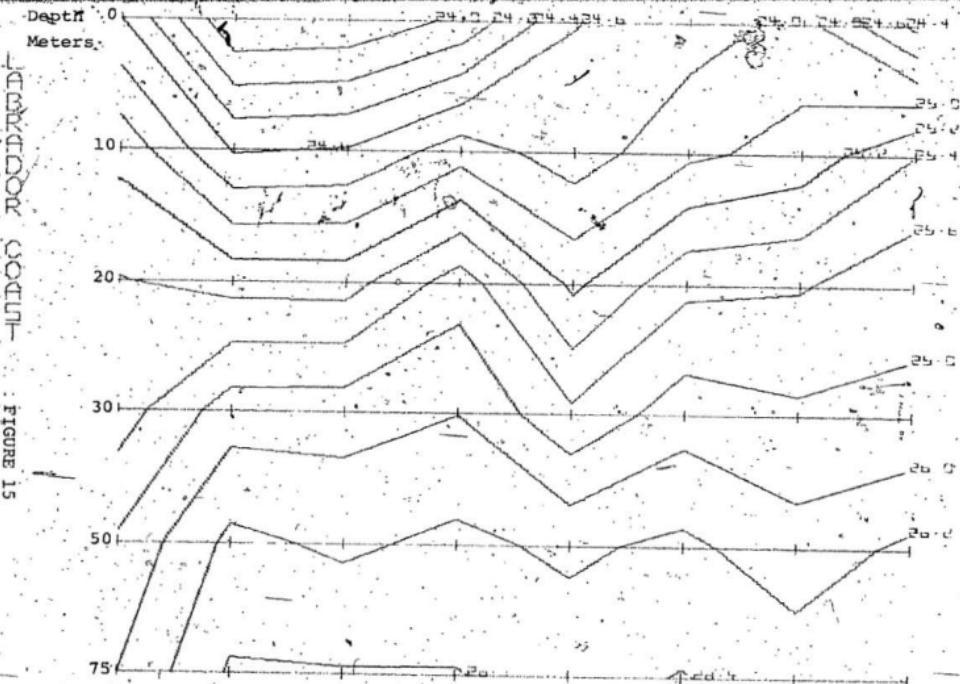

VERTICAL CROSS SECTION NORTH TRAVERSE 1"=6NM.

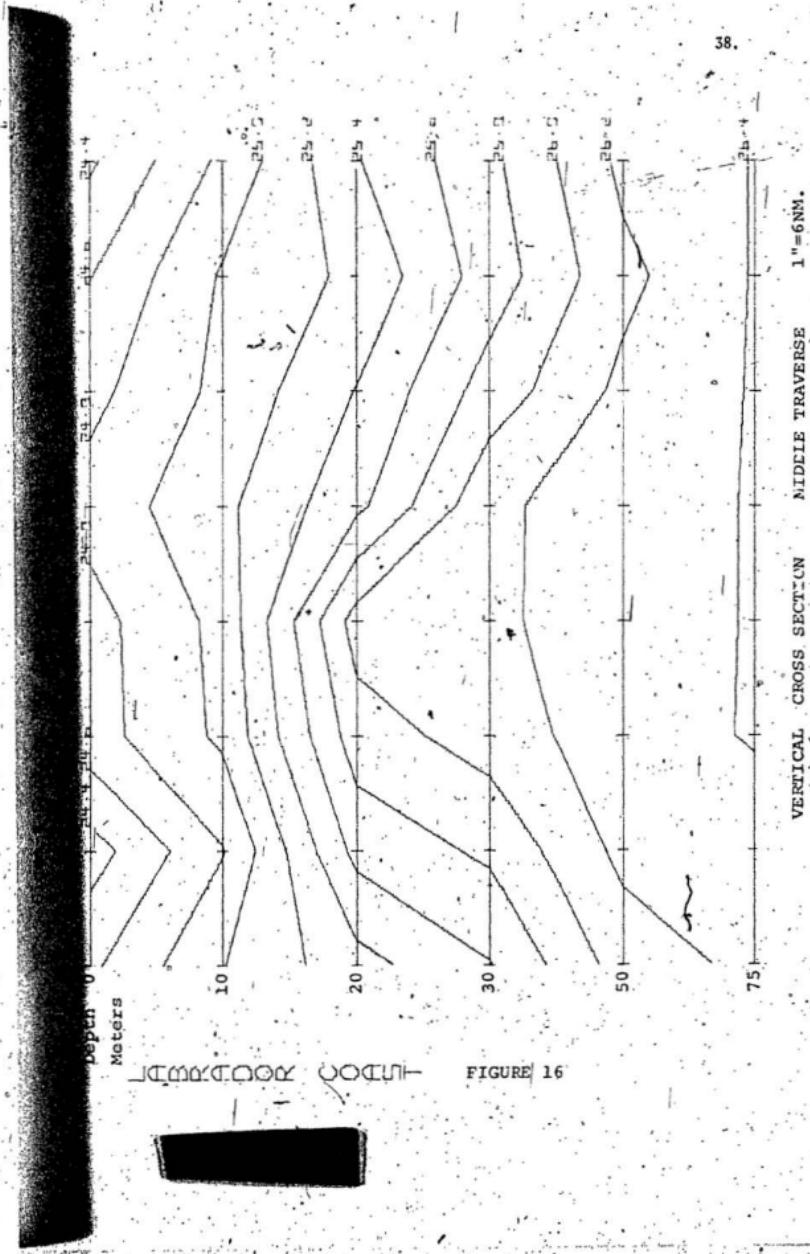


FIGURE 16

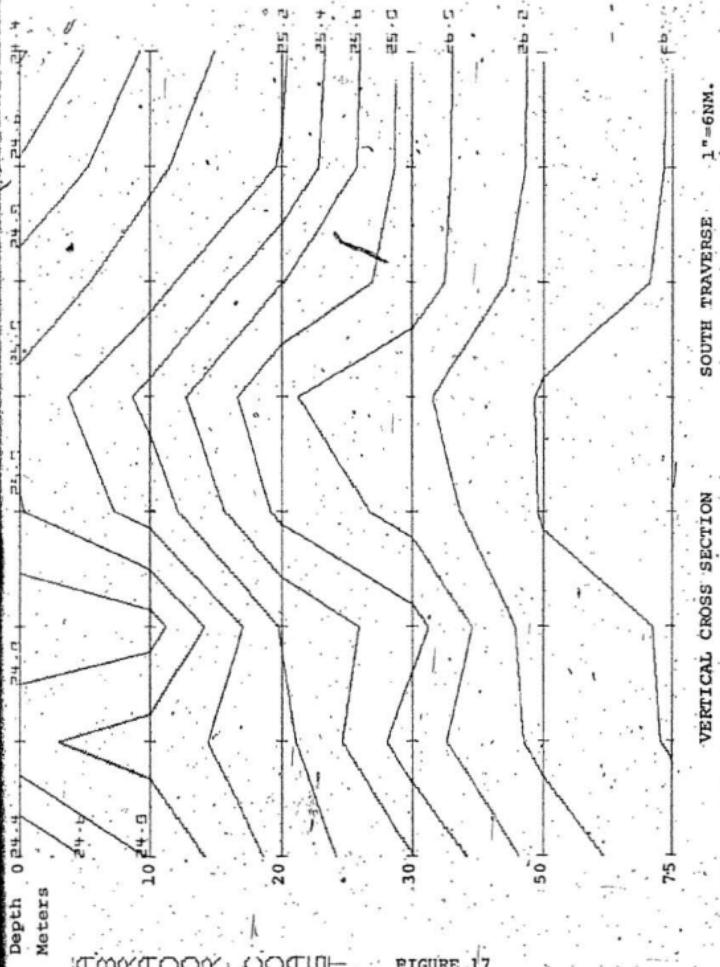
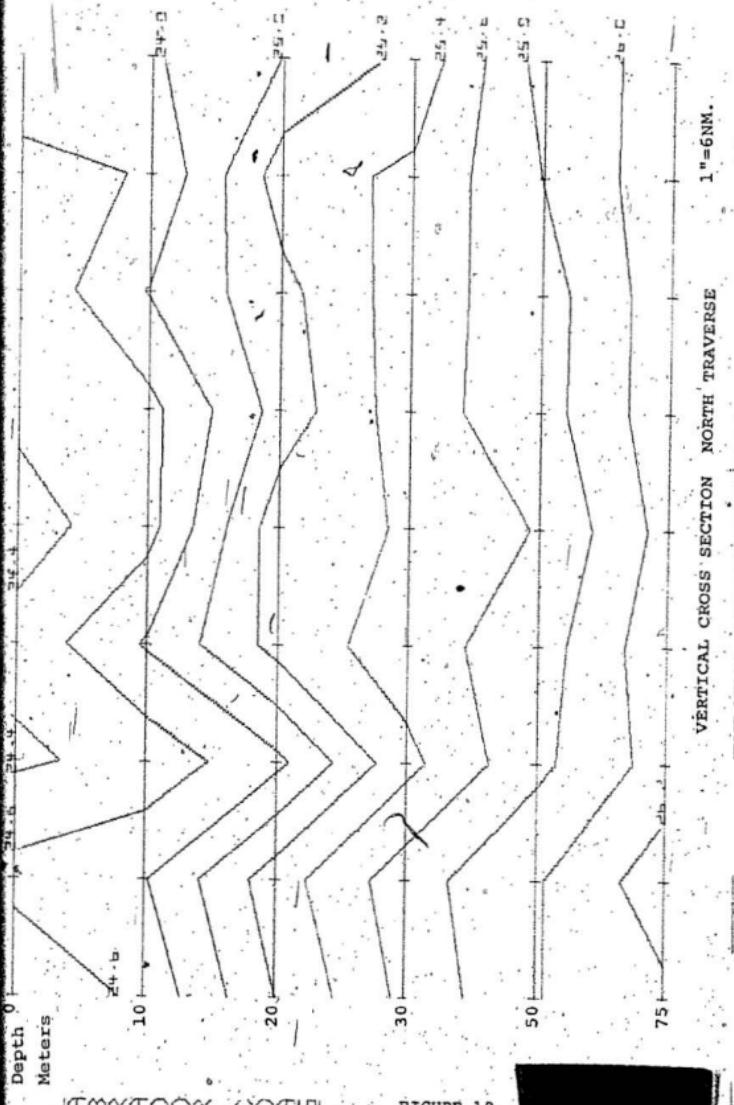


FIGURE 17



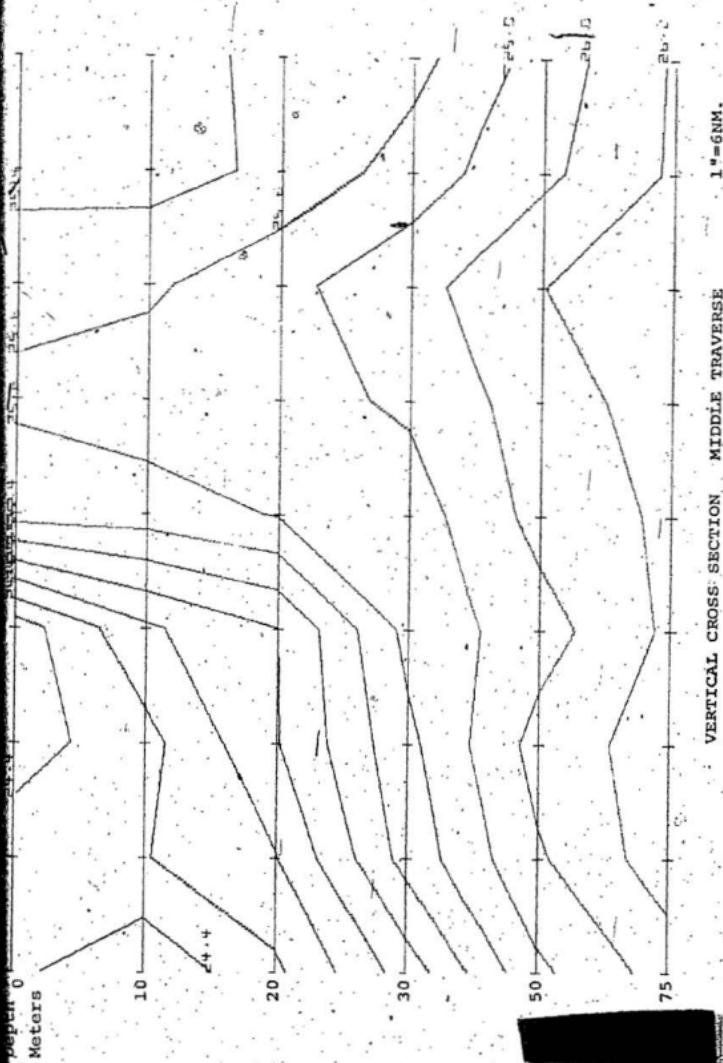
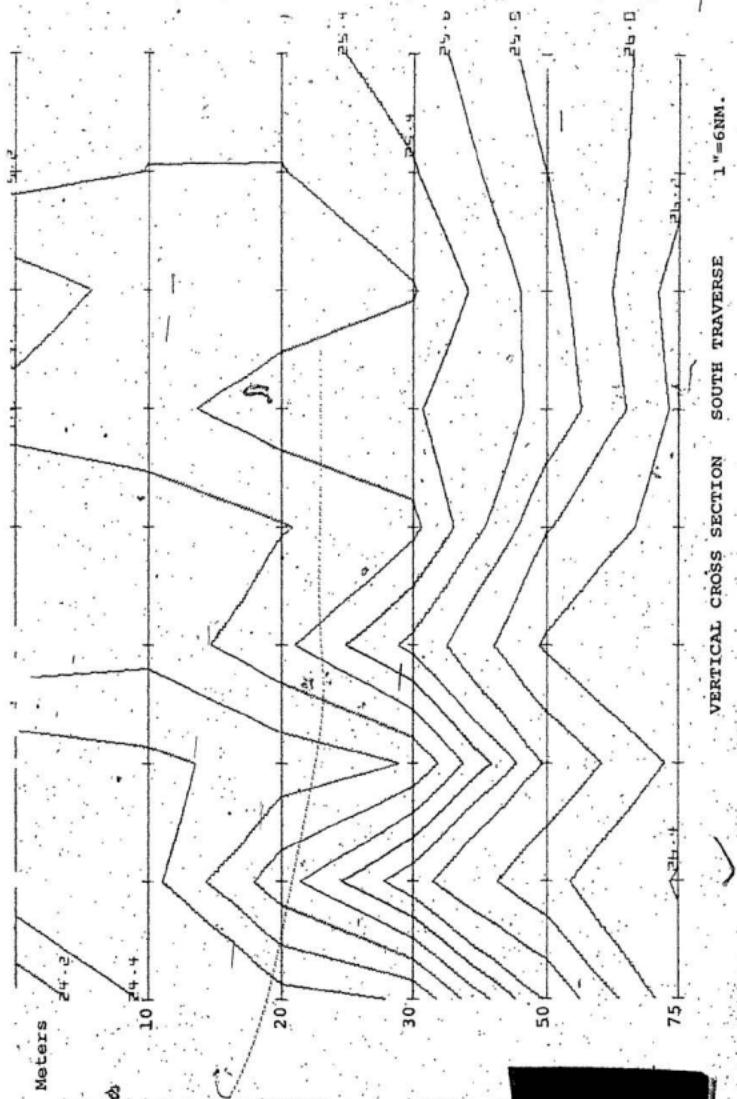


FIGURE 19



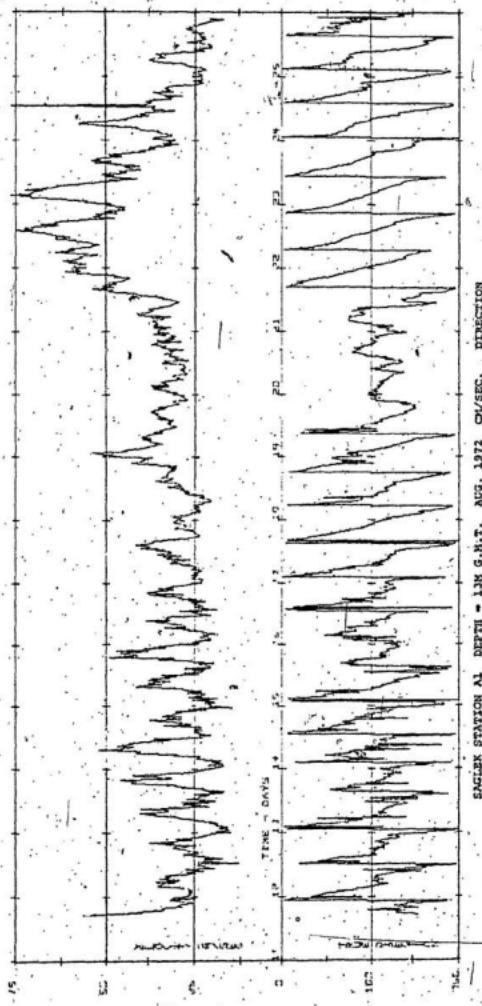


FIGURE 21


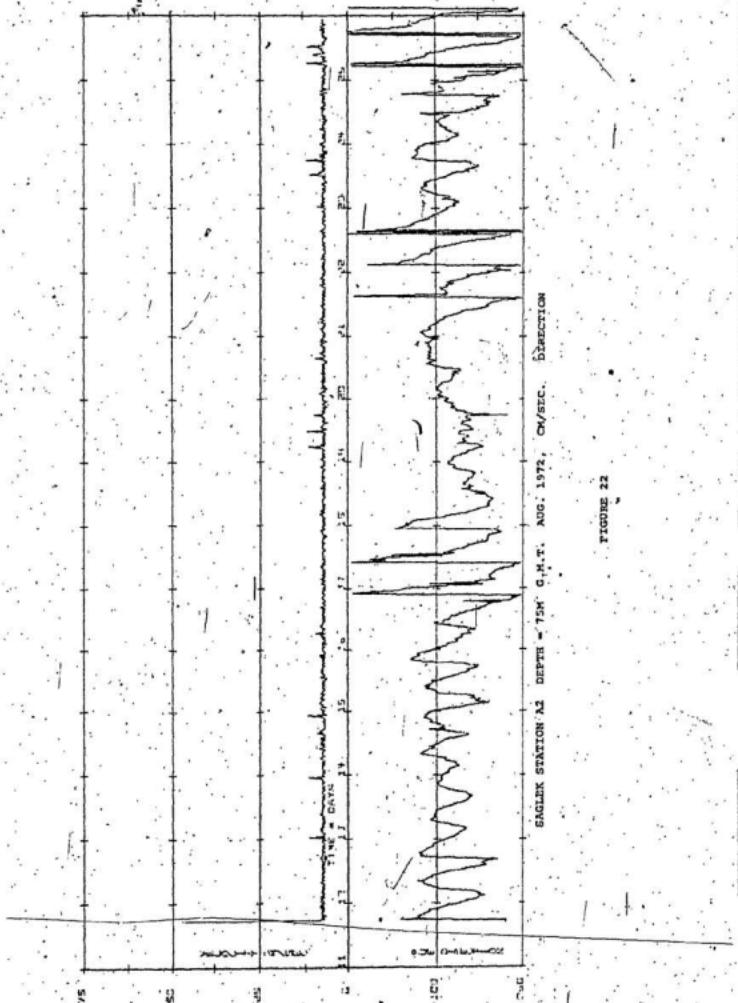


FIGURE 22

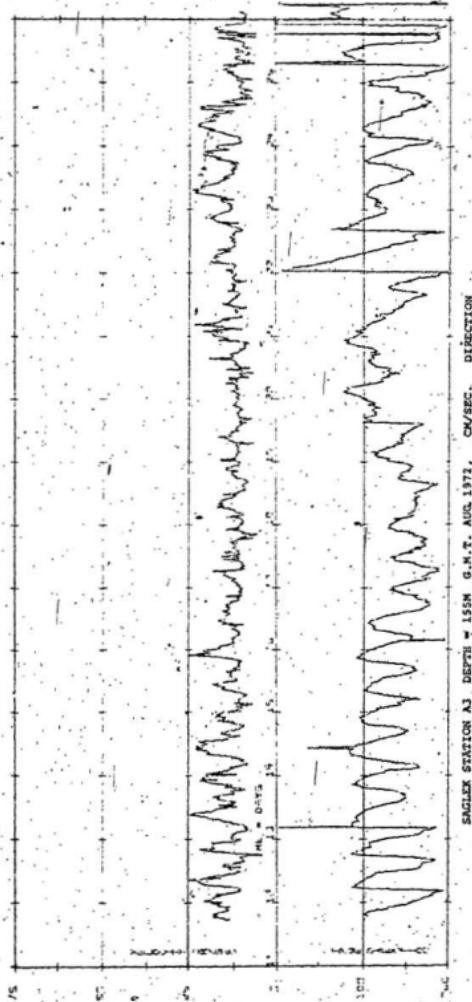

SINGLE STATION A3 DEPTH = 1550 G.M.T. AUG 1972, CH/SEC. DIRECTION

FIGURE 23

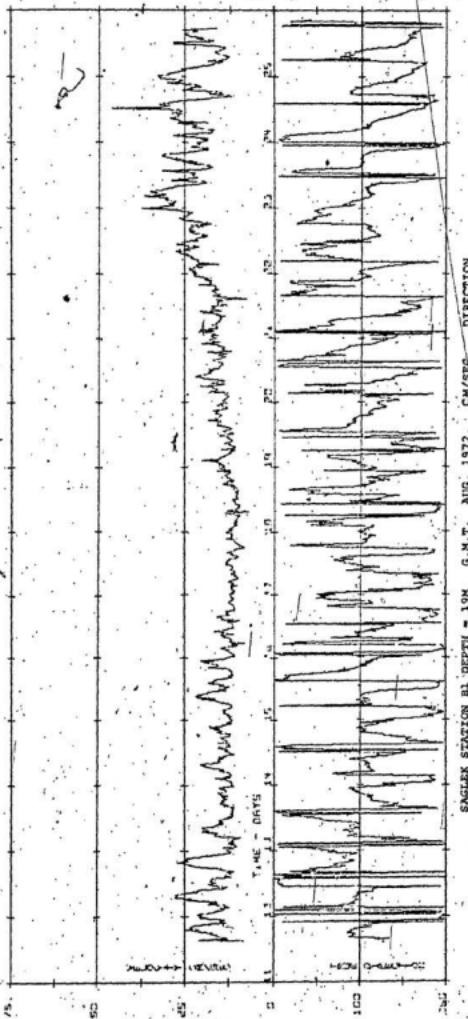


FIGURE 24

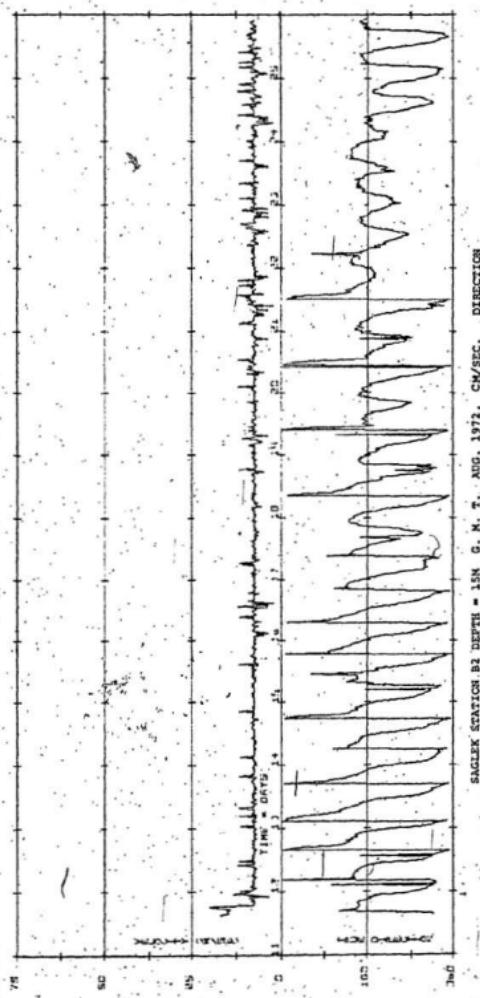


FIGURE 35

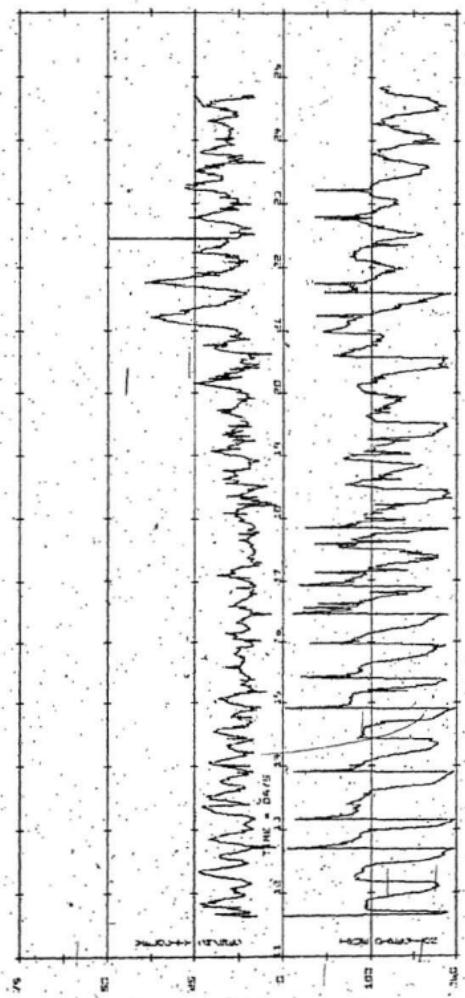


FIGURE 26


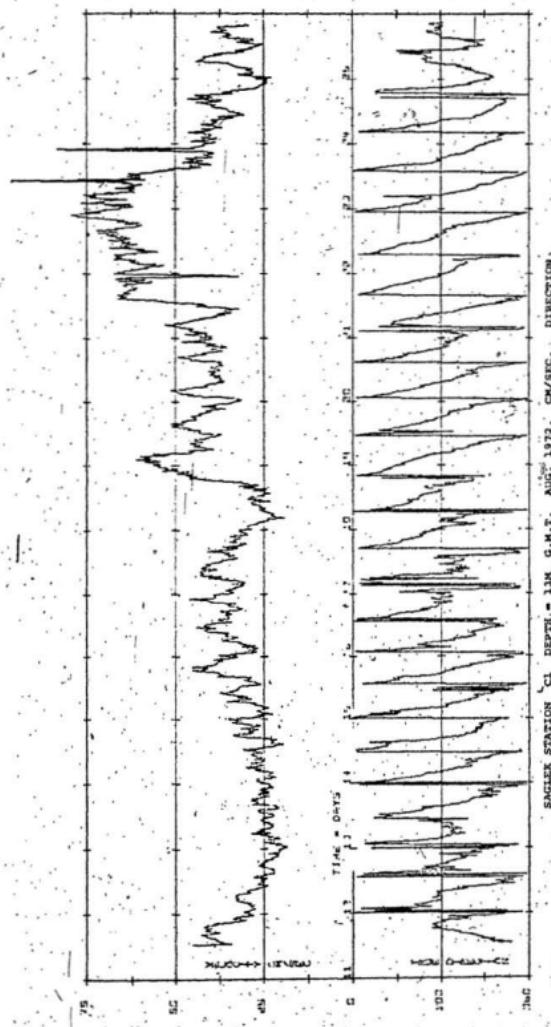


FIGURE 27

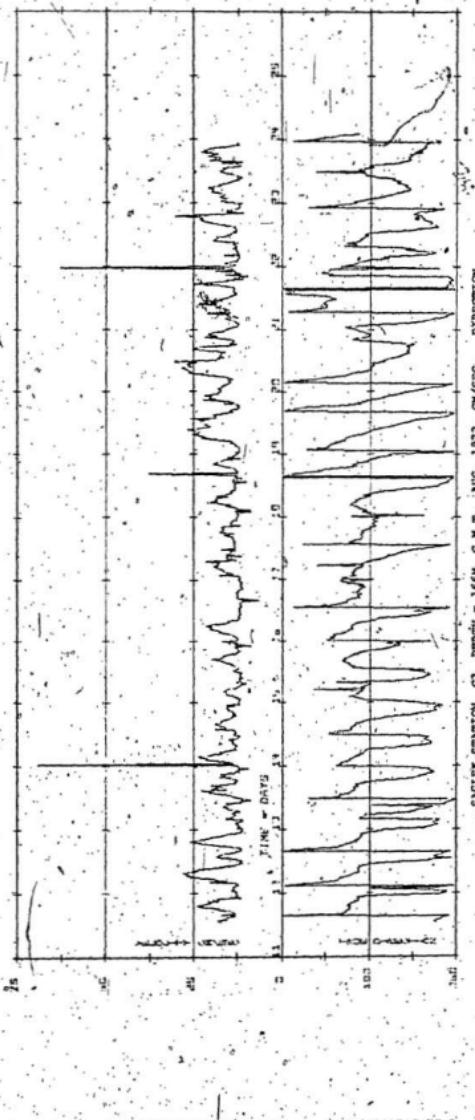

SOURCE: STATION C1 DEPTH = 166M. G.M.T. AUG. 1972, CM/SEC. DIRECTION

FIGURE 26

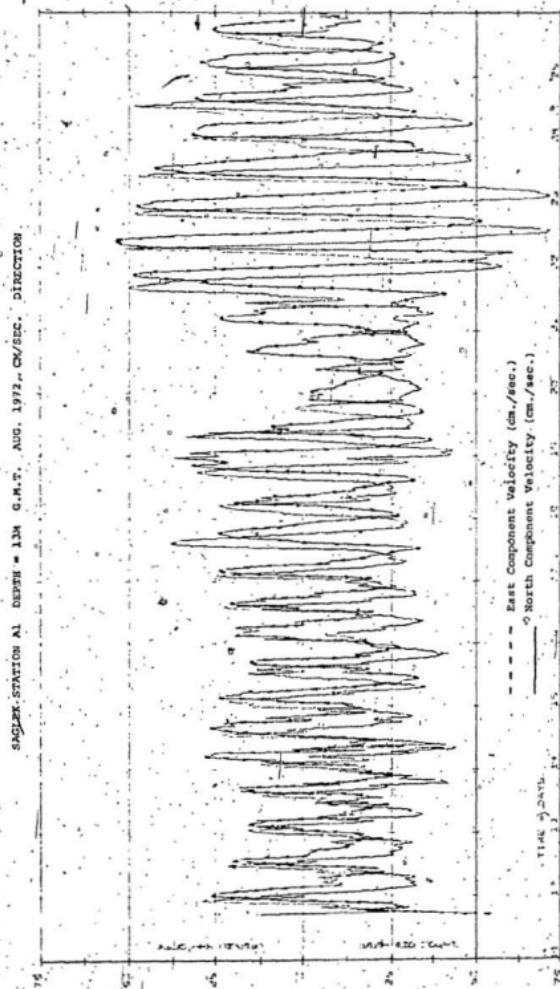


FIGURE 29.

SAILOR STATION X2 DEPTH = 75N G.M.T. AUG. 1972 CM/SEC.

DIRECTION

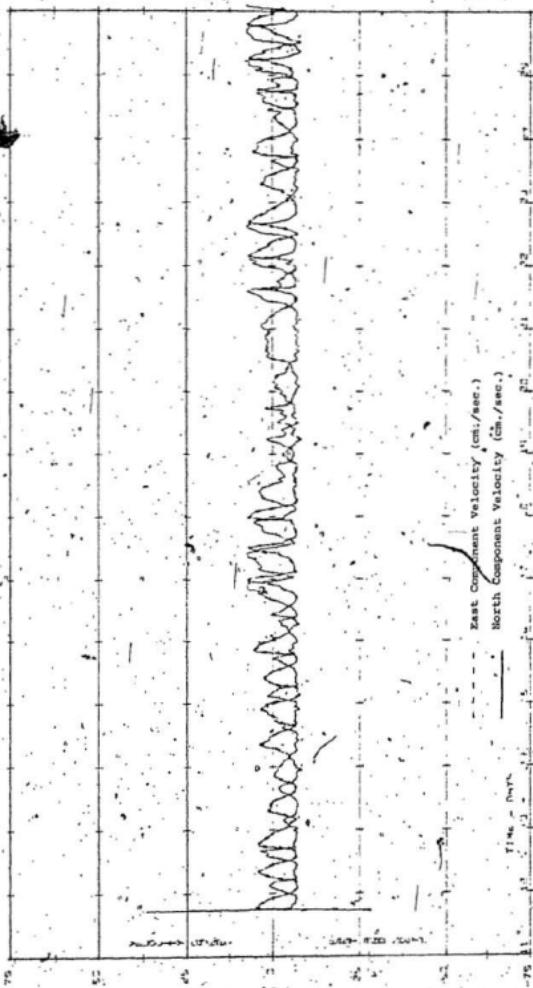


FIGURE 10



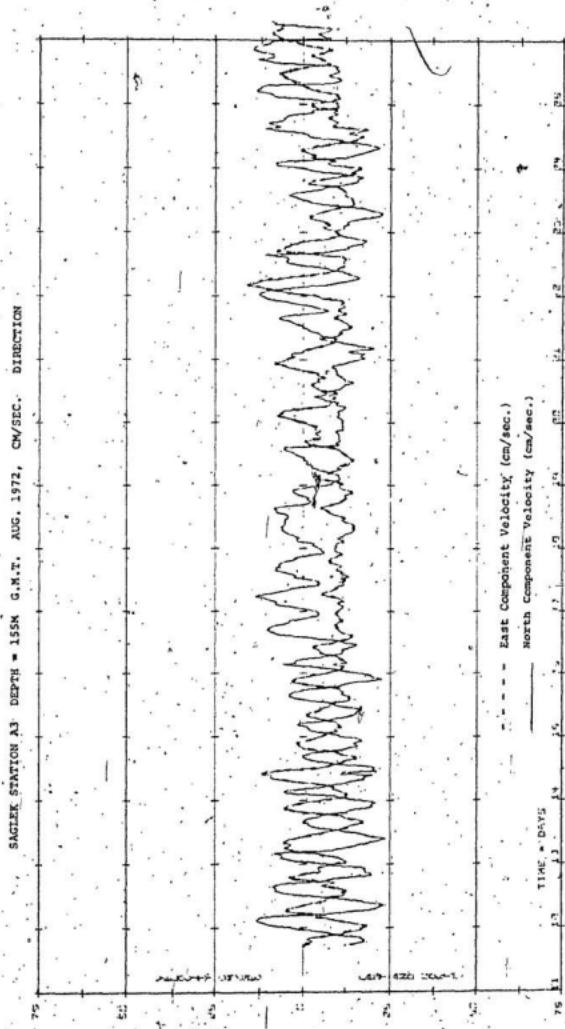


FIGURE 31.

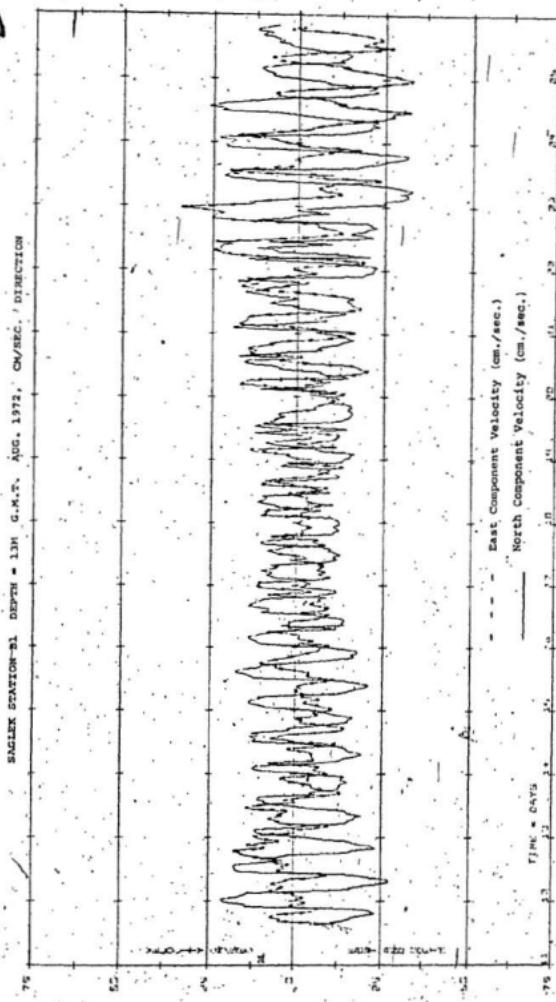

SAGLEK STATION #32 DEPTH = 75M G.M.T. AUG. 1972 CM/SEC. DIRECTION

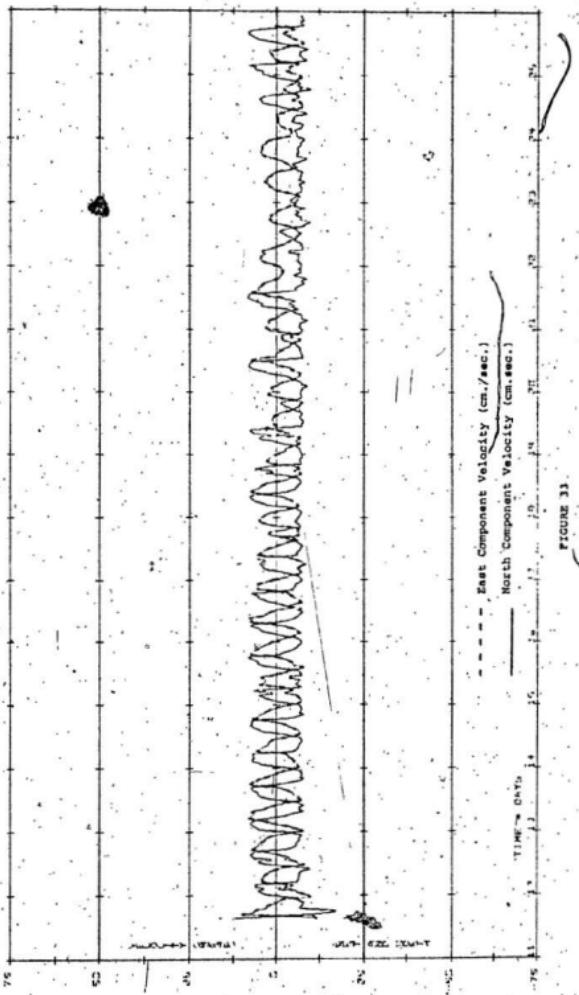

TIME (hrs)

East Component Velocity (cm/sec.)

North Component Velocity (cm/sec.)

FIGURE 33

55.

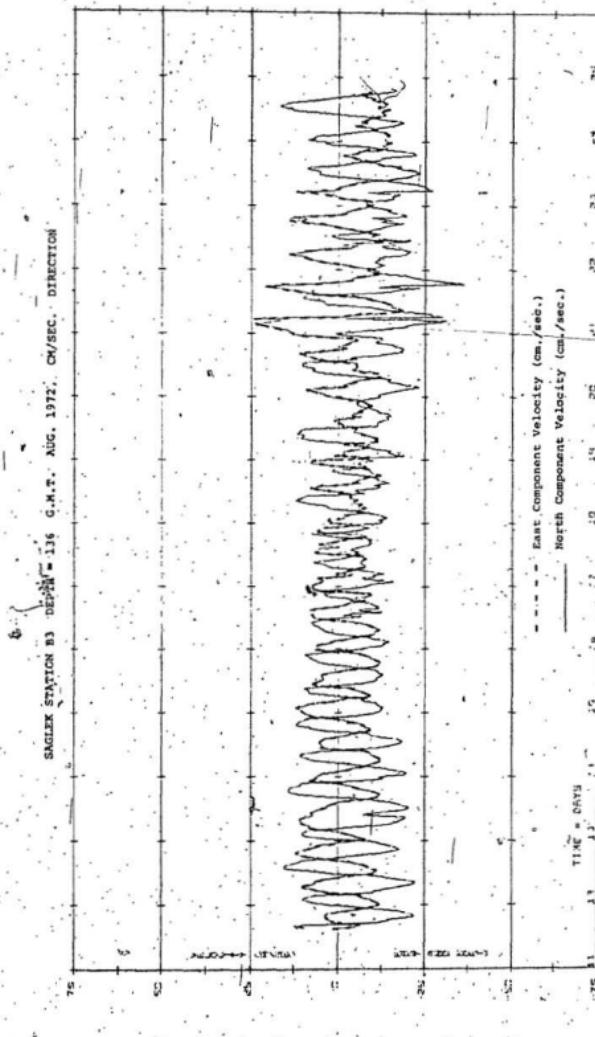
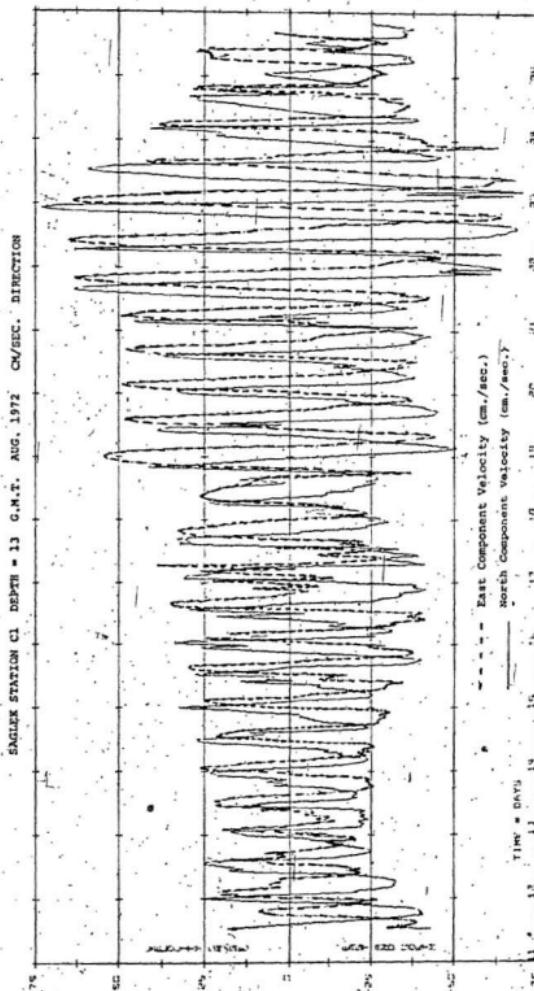


FIGURE 3d





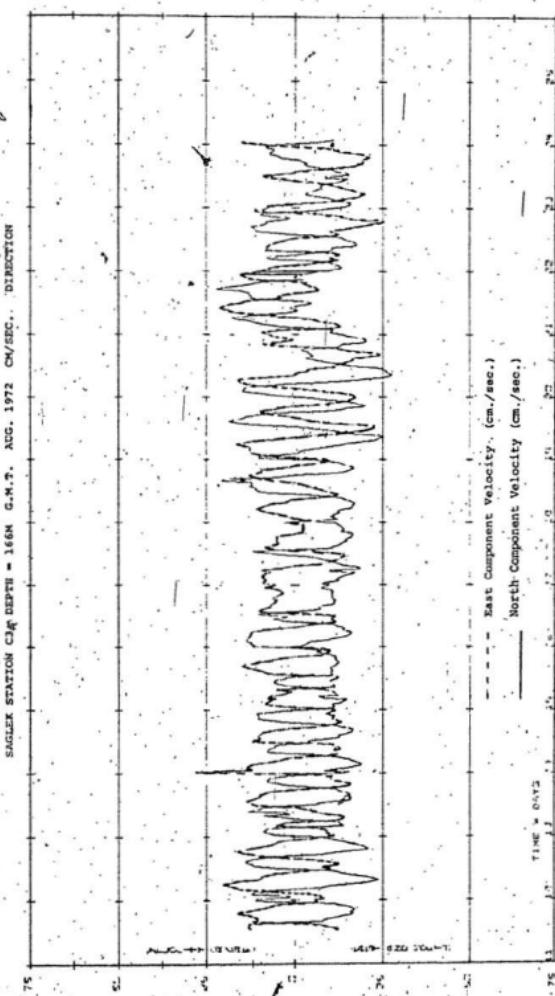


FIGURE 36

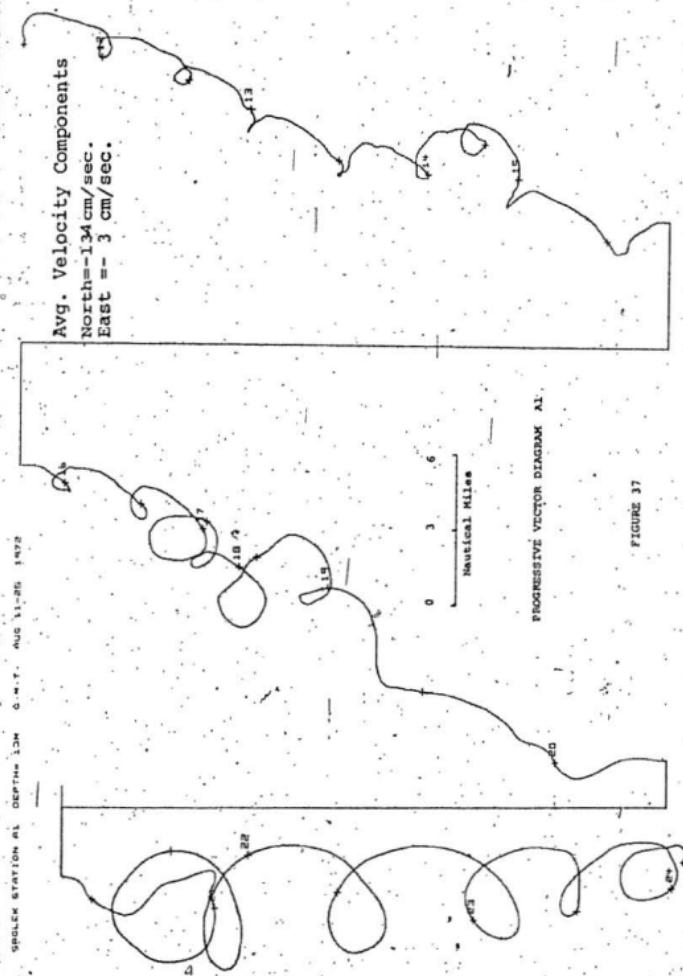

EAGLEK STATION A2 DEPTH= 75M G.M.T. AUG-11-25 1972

NOTE: The velocity recorder in
this meter malfunctioned,
and hence this diagram
represents only general
direction.

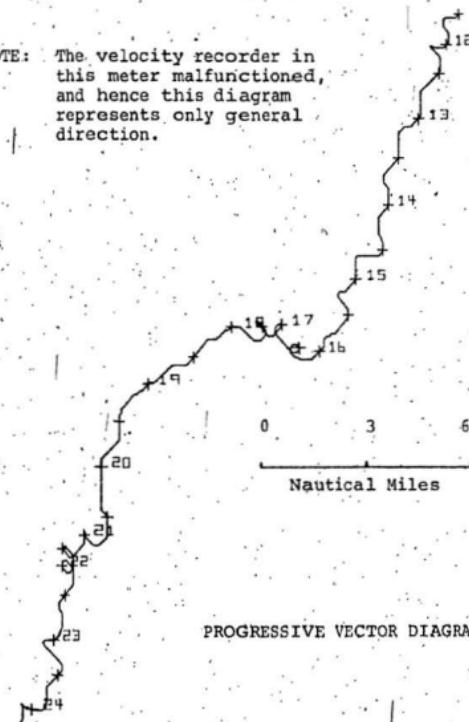

PROGRESSIVE VECTOR DIAGRAM A2

FIGURE 38

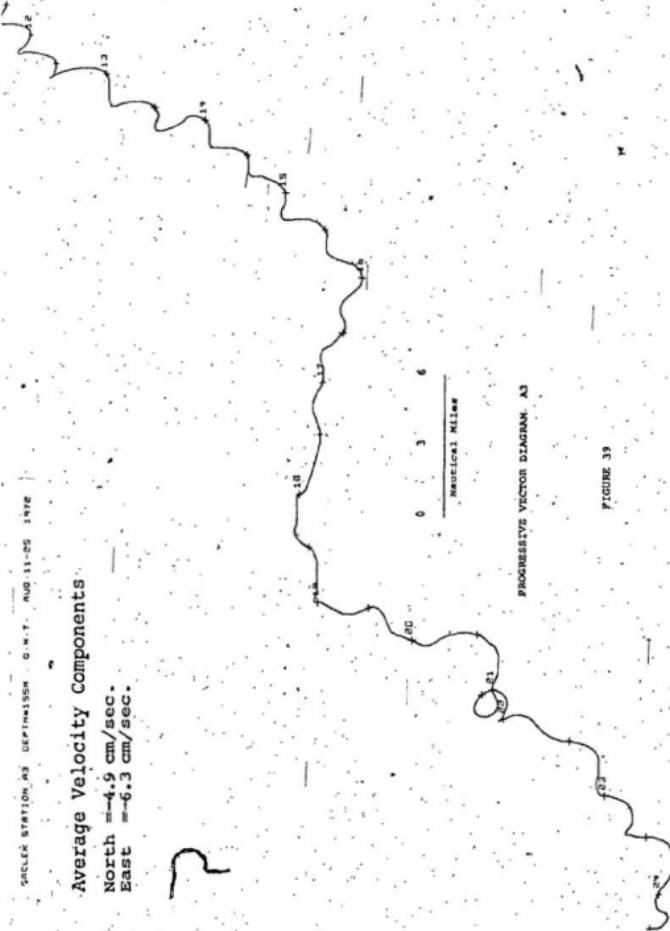



FIGURE 39

SAGLEK, STATION B1, DEPTH= 13M G.M.T. AUG-11-25 1972

Average Velocity Components

North = -3.7 cm/sec.

East = -1.7 cm/sec.

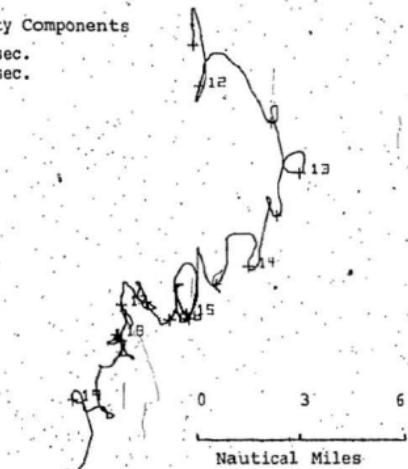


PROGRESSIVE VECTOR DIAGRAM B1

FIGURE 40

SACOLEK STATION B2 DEPTH= .75M G.M.T. AUG. 11-25 1972

NOTE: The velocity recorder
in this meter
malfunctioned, hence
this diagram
represents only
general direction

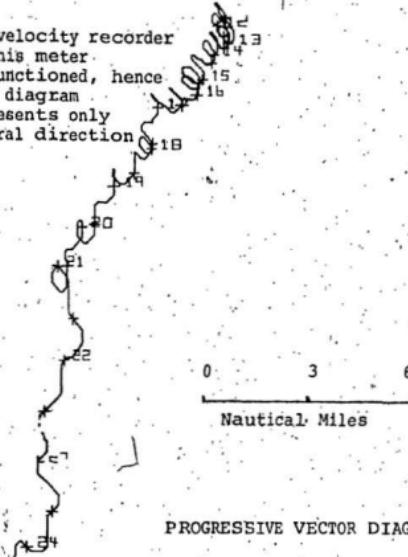

PROGRESSIVE VECTOR DIAGRAM B2.


FIGURE 41

SAGLEK STATION B3 DEPTH=136M G.M.T.: AUG 11-25 1972

Average Velocity Components

North = -5.9 cm/sec.

East = -2.1 cm/sec.

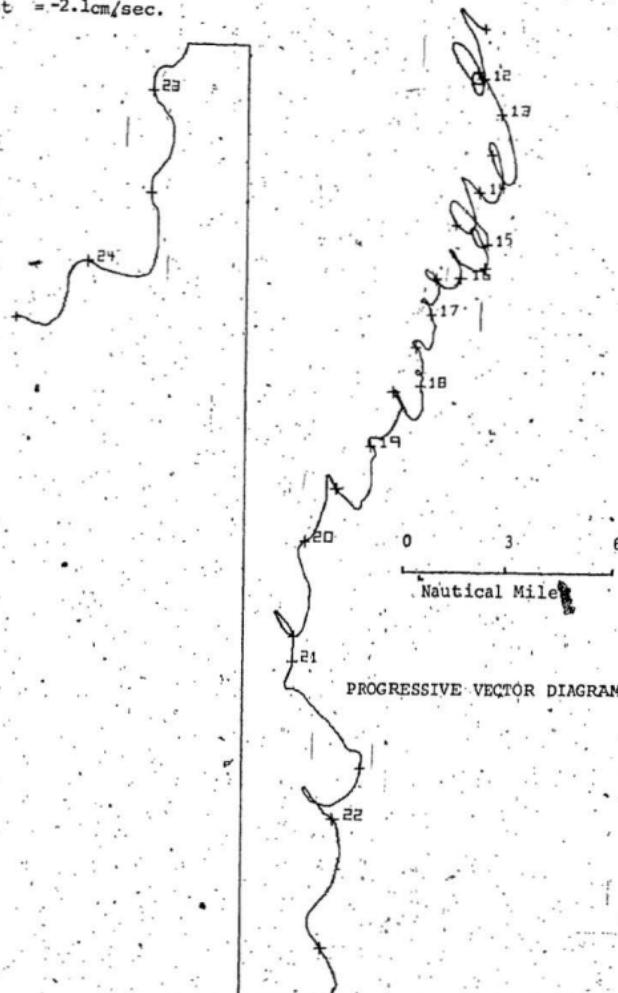


PROGRESSIVE VECTOR DIAGRAM B3

FIGURE 42

K. B. MITON C1 DEPTH 13H 6 H.T. AUD 11-265 3492


Average Velocity Components
North $\bar{v} = -8.7 \text{ cm/sec.}$
East $\bar{u} = -3.1 \text{ cm/sec.}$

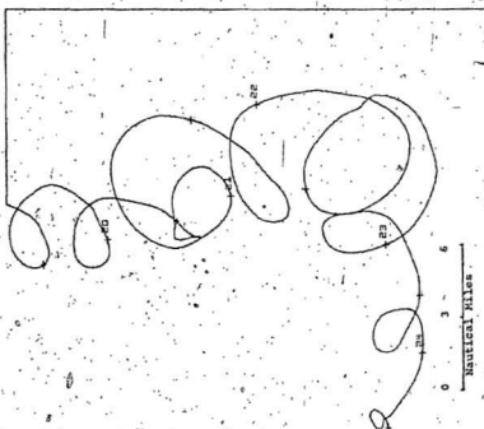

PROGRESSIVE VECTOR DIAGRAM C1

FIGURE 43

SACKEK STATION C3 DEPTH=166M G.M.T. AUG 11-25 1972

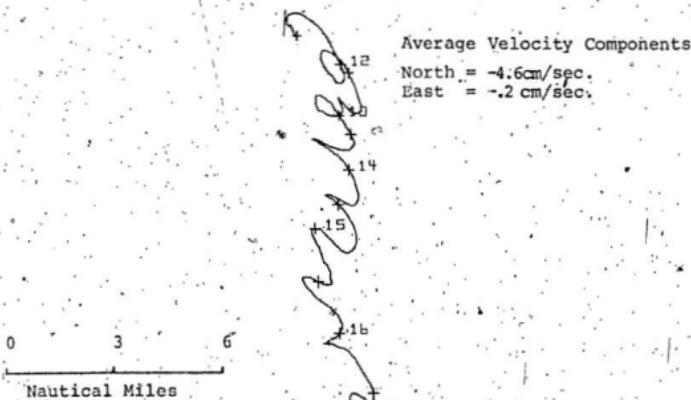

RESITIVE VECTOR DIAGRAM C3

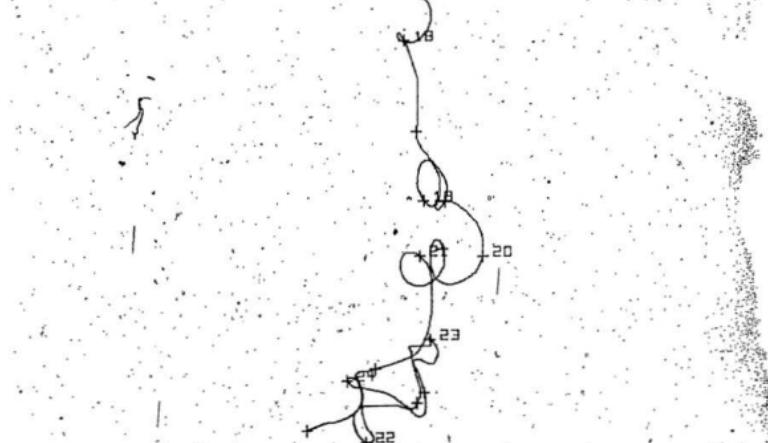


FIGURE 44

PARTIAL RECORD OF TIDE GAUGE

SAGLEK, LABRADOR

1972

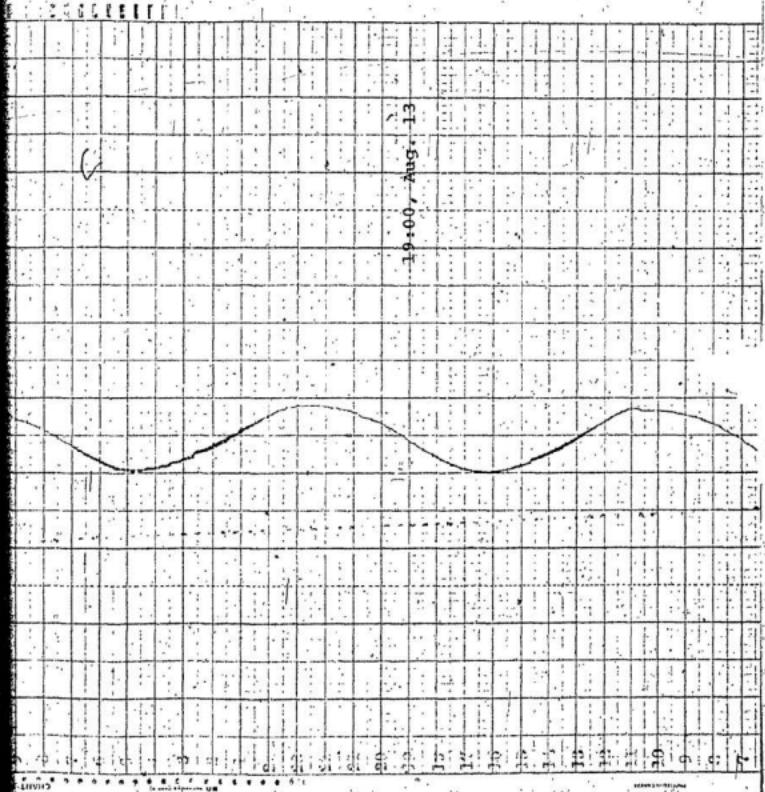


FIGURE 45

BIBLIOGRAPHY

1. J.H. Allen "Iceburg Study, Saglek, Labrador, Cruise Report C.S.S. Dawson", August 7 - August 26, 1972.
2. M. Knudsen "Hydrographical Tables", 1901.
3. B. Holden and S.A. Keillor "A Simplified Box-Scan Contouring Package", submitted for publication.
4. G. Neumann "Ocean Currents", Elsevier Publishing Company, 1968.
5. D.J. Lawrence "Braincon 381 Current Meter Rotor Calibration Memorandum", Bedford Institute of Oceanography, 1971.
6. H.U. Sverdrup, M.W. Johnson and R.H. Fleming "The Oceans", Their Physics, Chemistry, and General Biology, Prentice-Hall, 1942.
7. A.N. Betz "Digital Plotter Subroutines for Memorial University", unpublished paper, 1972.
8. G. Neumann and W.J. Pierson, Jr. "Principles of Physical Oceanography", Prentice-Hall, 1966.
9. O. F. Webster "Bridge Log Book", C.S.S. Dawson, Cruise # 72/022, August 1972, Saglek, Labrador.
10. "Observations of Inertial-Period Motion in the Deep Sea", Reviews of Geophysics, Vol. 6, No. 4, November 1968.

11. J.R.N. Lazier "The Renewal of Labrador Sea Water", Deep Sea Res., 20(4) : p. 341-353, 1973.
12. W. Templeman "Annual Report and Investigators Summaries", Fisheries Research Board of Canada, Biological Station, St. John's, 1971.
13. W. J. Dixon "Biomedical Computer Programs", University of California Press, 1970.
14. W.E. Russell "Current Studies in the Labrador Current with respect to the Motions of Icebergs". Department of Engineering, Memorial University 1973.

APPENDIX A

Chronological Listing of C.S.S.

Dawson Activities

C. S. S. DAWSON

| DATE | G.M.T. TIME | LOCATION AND ACTIVITY |
|-----------|-------------|--|
| Aug. 7-10 | | proceeded to Saglek, slow during night due to ice-bergs and fog. |
| Aug. 11 | 1137 | STD reading taken to locate thermocline. |
| | 1221 | current meter C moored. |
| | 1448 | current meter B moored. |
| | 1700 | current meter A moored. |
| | 1935 | began Middle Traverse at station 10, taking STD and grab samples. |
| Aug. 12 | 0537 | completed Middle Traverse at station 18. |
| | 1210 | current meter D moored. |
| | 1340 | attempted to tow bergy-bit; unsuccessful due to complications in securing sling. |
| | 1713 | three drogues released near current meter C. |
| | 1915 | stereo-photographed berg near current meter C. |
| | 1930 | began recovery of the three drogues. |
| | 2215 | began South Traverse at station 23, taking STD and grab samples. |
| Aug. 13 | 0412 | completed South Traverse at station 29. |
| | 0720 | began North Traverse at station 8, taking STD and grab samples; BT measurements taken at stations 2 and 1. |
| | 1442 | completed North Traverse at station 1. |
| | 1605 | released drogues SW of station 2. |
| | 1630 | towed bergy-bit for two hours near station 2. |

CHRONOLOGICAL LISTING OF C.S.S. DAWSON ACTIVITIES

APPENDIX "A"

| DATE | G.M.T. TIME | LOCATION AND ACTIVITY |
|--------|-------------|--|
| | 1935 | began recovery of drogues. |
| | 2055 | studied bergs north of station 2. |
| | 2211 | released drogues NW of station 2 and tracked their movement. |
| ug. 14 | 1138 | began close proximity studies of bergs in the eastern half of the study area, doing profiles and stereo-photography. |
| | 1145 | began recovery of drogues and continued close proximity study of bergs in the eastern half of the area. |
| ug. 15 | 2045 | scuba divers left for dive in Saglek Bay; returned in an hour. |
| ug. 16 | 1105 | divers returned from second 30 minute dive in Saglek Bay. |
| | 1400 | began berg towing study SW of station 45; launched two drogues. |
| | 1600 | terminated towing bergy-bit (sling slipped off). |
| | 1706 | took grab sample and sediment cores near station 47. |
| | 1910 | began recovery of two drogues. |
| | 2300 | began releasing drogues NW of station 2A and NW of station 3A. |
| ug. 17 | 0030 | began North Traverse at station 1A, taking STD readings. |
| | 1700 | completed North Traverse at station 4. |
| | 1925 | began taking grab samples and sediment core NW of station 42. |

CHRONOLOGICAL LISTING OF C.S.S. DAWSON ACTIVITIES

APPENDIX "A"

| DATE | G.M.T. TIME | LOCATION AND ACTIVITY |
|---------|-------------|---|
| Aug. 18 | 2230 | began North Intermediate Traverse at station 40, taking STD readings; BT measurement taken at station 41. |
| | 0311 | completed North Intermediate Traverse at station 48. |
| | 0433 | began Middle Traverse at station 12, taking STD readings. |
| | 0743 | completed Middle Traverse at station 10A. |
| | 0819 | began South Intermediate Traverse at station 50, taking STD measurements; BT reading taken at station 52. |
| | 1005 | completed South Intermediate Traverse at station 52. |
| | 1040 | began drogue tracking study near station 52. |
| | 1206 | began recovery of drogues. |
| | 1700 | began stereo-photography and profiling of grounded berg SW of station 23. |
| | 1840 | began stereo-photography and testing of Furuno echo sounder at berg SE of station 23. |
| | 1904 | released and tracked drogues south of station 23 and 24. |
| | 1915 | stereo-photographed and profiled berg south of station 28. |
| | 1227 | began recovery of drogues. |
| | 1446 | began releasing drogues. |
| | 1636 | began stereo-photography and profiling of two bergs south of station 24. |
| | 2030 | began mooring Z (SW of station 24) STD and current meter study. |

CHRONOLOGICAL LISTING OF C.S.S. DAWSON ACTIVITIES

APPENDIX "A"

| DATE | G.M.T. TIME | LOCATION AND ACTIVITY |
|---------|-------------|--|
| Aug. 20 | 1038 | began recovery of drogues. |
| Aug. 21 | 0820 | scuba divers departed for Saglek Bay for biological study. |
| | 0937 | scuba divers returned. |
| | 1105 | began release of two drogues; profiled and stereo-photographed ice bergs near station 13 and 16. |
| Aug. 22 | 1445 | searched for drogues |
| | 1615 | began sounding profile towards Watchman Island. |
| | 1730 | completed sounding profile. |
| | 1959 | began close proximity study of berg from W of station 23 to station 53, taking grab samples, profiles, stereo photographs, and STD measurements. |
| Aug. 23 | 1158 | studied bergs near stations 45 and 46 taking STD and BT readings, profiling, stereo-photographing, releasing drogues, and recovering grab and core sediment samples. |
| | 2014 | began releasing and tracking of drogues near station 1. |
| Aug. 24 | 1720 | began recovery of drogues. |
| | 1808 | took grab samples and sediment cores near station 12. |
| | 2323 | began North Traverse at station 1.. taking STD measurements; BT reading taken at station 1. |
| Aug. 25 | 0843 | completed North Traverse at station 9B. |
| | 0954 | began Middle Traverse at station 20, taking STD measurements; BT readings taken at stations 16 and 13. |
| | 1732 | completed Middle Traverse at station 10. |

CHRONOLOGICAL LISTING OF C.S.S. DAWSON ACTIVITIES

APPENDIX "A"

| DATE | G.M.T. TIME | LOCATION AND ACTIVITY |
|---------|-------------|--|
| Aug. 26 | 2316 | recovered current meter moorings B, C, D and A. |
| | 0050 | began South Traverse at station 23, taking STD measurements. |
| | 0808 | completed South Traverse at station 31. |
| | 1312 | headed for St. John's. |

CHRONOLOGICAL LISTING OF C.S.S. DAWSON ACTIVITIES

APPENDIX "A"

APPENDIX B

Specifications
of
Instruments

TYPE 381 HISTOGRAM* CURRENT METER

The Type 381 HCM Current Meter is a photo-recording instrument which measures and records current speed, direction, and instrument tilt. It is a completely new, miniaturized version of the well-known Braincon Type 316 HCM Current Meter, and uses the same patented method of data acquisition.

OPERATION

The Type 381 HCM Current Meter is programmed by a Bulova Accutron[†] Timer. It records on 16mm film by making a time exposure of radio luminous material applied to the sensors. When the programmer contact closes it activates a transistor switch, energizing the film drive motor for 30 seconds, which advances the film to the next data frame. The camera continuously records the sensor output until the next programmer switch closure.

FEATURES

Small Size — The Type 381 measures only 30½" between mooring eyes. With a total weight in air of less than 35 lbs. it requires little storage space and can easily be handled by one man.

Convenience — In addition to reducing size and weight, Braincon has eliminated tie rods. Removing the end cap is now a matter of unscrewing three captive nuts, with no special tools required.

Piston "O" Rings — These provide positive protection at all depths within the instrument's pressure range. The "O" ring cannot accidentally slip from place during pressure case assembly.

Accutron Timer — Maximum timing accuracy and reliability is assured through use of a Bulova Accutron Timer. This device is powered by a self-contained mercury cell and accuracy of timekeeping is plus or minus 2 seconds per day under most operating conditions.

Magazine Film Loading — The Type 381 uses a standard, readily available Kodak daylight loading 16mm film magazine. No dark room or film threading is required. The camera can be loaded or unloaded in seconds, even on deck.

High Corrosion Resistance — All exposed aluminum parts are Sanford Hard-Coated to thickness of .002" and covered with two coats of synthetic "H" coating. Passivated stainless steel, inert plastics and two sacrificial magnesium anodes complete the anti-corrosion protection.


Design Simplicity — This instrument consists of two basic assemblies, each attached to a pressure case end cap. One contains the camera, drive motor, timer and power supply. The other is comprised of the Savonius Rotor (external), compass and inclinometer assemblies, including the sensor display. The pressure case itself provides proper spacing between assemblies.

Histogram Recording Technique — The Type 381 HCM Current Meter employs a histogram recording technique which consists of making sequential time exposures of the self-luminous sensor indicators. Each data frame thus obtained is a histogram of current direction, tilt direction and instrument tilt, and an average of current speed. The luminous instrument serial number appears on each data frame. The camera will record all data occurring for a period of 15 seconds or longer.

The Self-Luminous Sensor Indicators — These light sources require no external power, thereby minimizing battery requirements. Four readily available alkaline A cells will advance the entire film load and provide an excellent safety factor, even at -2°C.

The inherent reliability of self-luminous sensor indicators, mechanical simplicity and very low power requirements combine to make the Type 381 HCM unusually dependable in its operating environment.


[†]TM Bulova Watch Co.
Reg. T.M.

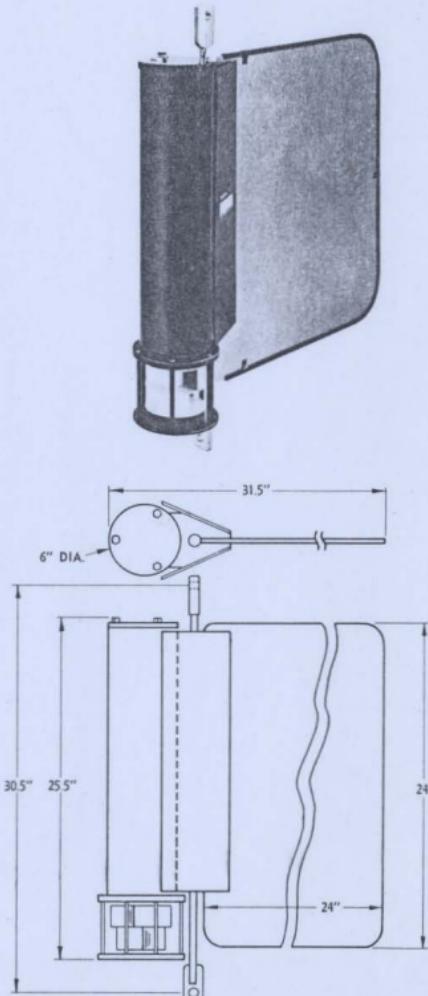

004521

Typical data record from Braincon Type 381 Histogram Current Meter. Data frame drawing at right illustrates ease of visual interpretation. Braincon maintains complete processing and data translation facilities.

For more detailed information on the Type 381 Histogram Current Meter contact the Sales Department, Braincon Corporation.

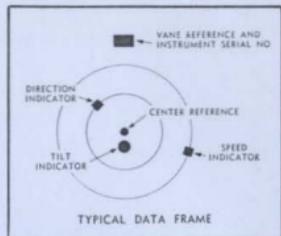

SPECIFICATIONS

CURRENT SPEED SENSOR

Type: Savonius Rotor (Balanced in Air)

Speed Range: 0 to 5 Knots

Calibration Threshold: 0.05 Knots (Minimum)

Sensitivity: 142 R.P.M./Knot (nominal)

Mounting: Tungsten carbide pivot bearings to instrument pressure case.

CURRENT SPEED OUTPUT

Format: Circular Analog

Sensitivity: Typically 140°/knot over 20 minute sample period with 7200:1 gear train.

Indicator: Radioluminous light source

Transfer Mechanism: Magnetically coupled gear train

Accuracy: ±3% of full scale (5.0 Knots) when used with calibration curve and corrected for tilt error.

CURRENT DIRECTION SENSOR

Type: Large area vane (3.65 square feet, balanced in water to be insensitive to tilt.)

Magnetic Direction: 0 to 360° (Continuous)

Sensitivity: ±5° at 0.05 Knots

Mounting: Fairied brackets welded to pressure case.

Bearing Materials: Teflon and 300 series stainless steel.

CURRENT DIRECTION OUTPUT

Format: Circular analog; viscous damped permanent magnet compass.

Indicator: Radioluminous light source.

Transfer Mechanism: Direct through instrument pressure case.

Accuracy: ±1%

INSTRUMENT TILT AND TILT DIRECTION SENSOR

Tilt Range: 0 to 30°

Direction: 0 to 360° (continuous)

INSTRUMENT TILT AND TILT DIRECTION OUTPUT

Format: Circular analog, viscous damped.

Sensitivity: ±0.5% Direction

Indicator: Radioluminous light source.

Transfer Mechanism: Direct

Accuracy: 10% Tilt Angle; ±3% full scale Tilt Direction.

RECORDER

Method: Direct photographic time exposure of sensor outputs.

Camera: Integral unit attached to removable end cap. Unit contains film magazine, timer, drive motor and batteries.

Film Type: Kodak Tri-X Reversal film in standard 50 ft. 16mm magazine; Kodak Spec. TXR447.

Power: 4 alkaline penlite cells (RCA Type VS1334 or equivalent)

MODE

Number of Recordings: 3600

Rate: 1 Frame/20 minutes standard; 1 frame/10 minutes to 1 frame/hour per special order.

Maximum Unattended Recording Period: 50 days at 1 frame/20 minutes.

Test: Continuous, 1 frame/30 seconds.

TIME MECHANISM

Type: Bulova Accutron Timer.

Timekeeping Accuracy: ±2 seconds/day under most operating conditions.

Power: Self contained mercury cell.

OPERATING ENVIRONMENT

Operating Medium: Sea Water

Operating Temp. Range: -2 to 38°C (28 to 100°F)

Storage Temp. Range: -34 to 65°C (-30 to 149°F)

Maximum Pressure: 8,000 psi standard

Max. Tensile Load: 8,000 lbs. across suspension bar.

INSTRUMENT HOUSING

Material: Aluminum; 7075-T6, Fed. Spec. QQ-A-200 or equivalent.

Finish: Sanford Hard Coated

Coating: Double coated with Synthetic "H" coating.

Color: Black.

Hardware: 300 series Stainless Steel, welded where necessary.

Anti-Corrosion Protection: Sacrificial magnesium anode.

Anti-Fouling Protection: Applied commercial coating to sensors if required.

Condensation Control: Replaceable desiccant.

Size: Pressure Case — 6" O.D. x 25.5" long: 30.5" between mooring eyes.

Direction Vane — 24" x 24" x $\frac{1}{8}$ ".

Weight: In Air — 34 lbs. approx.


In Sea Water — 14 lbs. approx.

Self Recording

CURRENT METER

MODEL DNC-2

FOR CURRENT VELOCITY
AND DIRECTION MEASUREMENT

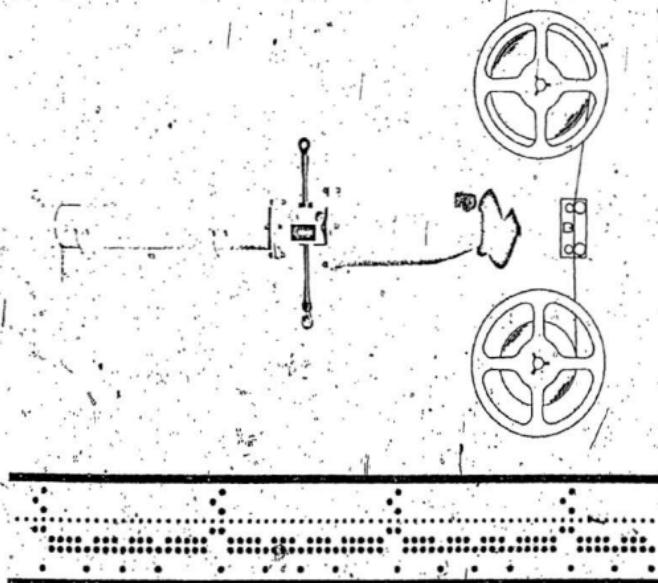

N.B.A. (CONTROLS) LTD.

SELF RECORDING CURRENT METER
MODEL DNC-2

The Current Meter DNC-2 is designed for measuring and recording the velocities and directions of currents and tidal streams in the sea, oceans, straits, harbours and bays, as well as for investigating the nature of such water movements in channels, rivers and estuaries. With this model the readings can be recorded over a cycle of up to 380 days in situ at depths down to 2,000 feet (600 metres).

PRINCIPLE OF OPERATIONS

- 1. The instrument operates by sampling the direction and average velocity readings at pre-set intervals and recording them on magnetic tape.
- 2. A translation unit is used to replay the tapes into a usable form (usually punched paper tape) for subsequent computer processing.

CONSTRUCTION

Model DNC-2 comprises two watertight compartments separated by a gimbal assembly, constructed of heavy duty stove enamelled marine alloy, containing velocity measuring and storage electronics, tape recorder, batteries, digital compass, crystal clock and associated electronics. The instrument has a neutrally buoyant impeller and detachable polypropylene stabilising tail plane.

CURRENT VELOCITY MECHANISM

The impeller, rotated by the water current, is magnetically coupled through the front bulkhead, to a Reed switch mechanism that converts the rotation to electrical pulses. These are fed into an integrated circuit memory, which stores the number of rotations as a binary number. There are two modes of operation, (selected by means of a soldered link), which are as follows :

1. The memory is reset to zero after every interrogation. This means that the velocity reading recorded is directly proportional to the average velocity measured between two interrogation periods.
2. The memory is not reset to zero after an interrogation. This means that the velocity reading recorded is an accumulative one, and is thus directly proportional to the total water flow past the instrument.

In both modes the reading is recorded as a 10 bit binary number, and can be scaled by pre-selecting (by means of soldered links) the division ratios in the electronic accumulator/memory. This scaling facility is extremely useful, since it can be selected to provide optimum resolution and dynamic range for all the available interrogation times and velocity conditions.

The impeller has a starting velocity of less than 3 cm/sec., and a calibrated linearity up to 250 cm/sec. of better than 2%.

CURRENT DIRECTION MECHANISM

1. The direction of the current is determined by a precision double mounted compass with a 7 bit optical encoding disc which is sampled every interrogation period, and recorded as a 7 bit binary number. The optical encoding disc is scaled such that 360° is represented as binary 120.

Accuracy : Resolution 3°.

TIMING

All timing sequences within the instrument are derived from a crystal controlled clock, within an overall accuracy over the temperature range 0-20°C of better than ± 2 sec/day. Since all the time references are reset to zero when the instrument is activated (by removing an external magnet and thus closing a switch in the instrument) it is a very simple matter to synchronise the instrument, or a complete string of instruments both to an external time reference and to each other.

The interrogation rate may be selected by means of soldered links to any period required from 0.5 min. to 31.5 min, in 0.5 min steps, as standard.



MODEL DNC-2 WITH PRESSURE CASES REMOVED

RECORDING.

The instrument contains a two track 1/4" specially designed tape transport mechanism for storing the obtained information. The recording time for each interrogation period is approximately 1 second, at a bit-density of approximately 75 BPI, and the following information recorded on Track 1 (Track 2 is used for reference clock pulses).

1. Instrument Serial No. - 8 bits, which is split up into two sections of 4 bits each. This information is used in the replay system both to identify the source of the tape, and to act as a check on information reliability. (See replay).
2. Reading No. - 12 bits. This reading commences at 1, and increases by one at each interrogation period up to 8, 181 after which it repeats. The information is used to obtain time references on playback, enables correct time information to be obtained even if other sections of the recordings are destroyed and allows analysis of the recording to commence at any part of the tape.
3. Velocity Reading - 10 bits.
4. Direction Reading - 7 bits.
5. A parity bit is recorded at the end of each interrogation period to give even parity to the information recording (see replay).

The whole recording system is designed so as to be extremely flexible. Repeat sampling can be used if other parameters are to be measured (e.g. temperature, pressure etc.)

CAPACITY

With 5" reels of triple play tape, the capacity of the recorder at standard bit density is over 20,000 sets of 38 bit readings. Higher bit densities can be supplied for special purposes.

POWER SUPPLY

The instrument is powered from a 12 v 5 Ahr self contained leak proof primary pack.

The battery life depends upon the interrogation interval, e.g. for an interrogation interval of 5 mins, life = 63 days, for an interrogation interval of 30 mins, life = 380 days.

SUSPENSION

In-line mounting via solid stainless steel tie bar with PTFE gimbal bearings and standard stainless steel shackles. Alternatively, a hollow tie bar assembly for position adjustment of a string of units can be provided.

OPTIONAL EXTRAS

1. Hydrophone.

Model DNC-2 is designed with a facility for a hydrophone attachment. This consists of a low power acoustic transducer which transmits in digital form (15 KHz power output 100 milliwatts), the electrical inputs from both current velocity and direction. Two surface units are available (a) for listening only i.e. system "check" out comprising headset and probe (b) for recording; (a) as (a) but with interface electronics and recorder. The use of this hydrophone will reduce battery life.

2. Telemetry.

Model DNC-2 can be supplied with acoustic, UHF or VHF telemetry links.

BUOYED SYSTEM

Model DNC-2, being completely self-contained and in-line mounted, makes recording from many units in a vertical "string" relatively simple as it is not necessary to use suspension frames or electrical slip rings. The design also allows the instrument(s) to be handled/launched with a minimum of difficulty. Such systems can be quoted for complete with straining cable, surface/sub-surface support buoys; single or double time releases containing separate back-up timing mechanism or acoustic release plus back-up timer.

WEIGHTS AND DIMENSIONS

| | | | |
|--------------------------|---|--------|-------------|
| Overall length | : | 42.50 | 108.00 cms |
| Frontal Section Diameter | : | 7.25 | 18.00 cms |
| Rear Section Diameter | : | 3.75 | 9.50 cms |
| Weight in Air | : | 69 lbs | 27.00 kilos |

REPLAY SYSTEM

There are two basic methods available to enable the recordings to be processed.

1. The self contained translation unit.
2. The translation service.

The self contained translation unit can be supplied in several forms, to customers' requirements. However, the standard unit consists of the following sub-units:-

1. TAPE REPLAY DECK

This tape replay transport, based on a standard deck, will accept directly the spools from the DNC-2 Recorder. Facilities include playback at 15/16"/sec, equivalent to approximately 1 set of readings per sec. This enables the individual readings to be monitored on the display unit for individual analysis. The normal playback speed into the Facit punch is 3 1/2"/sec.

2. SIGNAL PROCESSING AND DISPLAY UNIT

The signals from the tape deck are processed and stored both for display and for feeding the punch unit. The display shows the following information in decimal decimal:-

1. Instrument Number /
2. Reading Number .
3. Velocity reading .
4. Direction reading [directly in degrees]
5. Total number of Parity errors.
6. Total number of serial no. errors.

3. PUNCH/PRINTER

The normal punch used in the unit is a Facit Type 4070.

The system produces standard 8 hole punch paper tape (ASCII code) with the requisite format for further processing.

Alternative punches and printers are available to order, as is a multi-channel real time analogue output.

TRANSLATION SERVICE

The data handling division of N.B.A. (Controls) Ltd. can provide tape translation facilities by return of post to any customers who prefer not to invest in a translation unit.



N.B.A. (CONTROLS) LTD.

Manufacturers Of Oceanographic Instruments

Progress House Albert Road
Aldershot Hants

Telephone: Aldershot 28028/P

Specifications

SALINITY

Range:
30-40 ppt (other ranges available on
special order)

Accuracy:
±0.05 ppt

Resolution:
0.02 ppt

Temperature Compensation Time Constant:
350 milliseconds or less

Recorder Slew Rate:
3 ppt/Sec

TEMPERATURE

Range:
-2° to +35° in two overlapping
and automatically switched ranges

Accuracy:
±0.1°C

Resolution:
0.05°C

Temperature Sensor Time Constant:
350 milliseconds or less

Recorder Slew Rate:
5°C/Sec

DEPTH

Meters:
The following standard ranges
are available:

0-100 meters

0-300 meters

0-500 meters

0-1000 meters

0-2000 meters

0-4000 meters

0-6000 meters

Accuracy:
±0.25% of full scale *

Resolution:
±0.1% of full scale

RECORDER

Type:
Cylindrical drum plotter with two overlapping
styl

Recording Format:
Analog XIXZY Plot

Chart Size:
6-1/2 inches x 9-1/2 inches (one frame) x
100 feet long; (100 charts/roll)

Chart Capacity:
100 frames

Sampling Rate:
Continuous

Recording Rate:
Continuous. Recorder responds to a step
change input in less than 3 seconds for
full-scale travel of styl; 5 seconds for
full rotation of drum

GENERAL FEATURES

Pressure Case Material:

Aluminum alloy for operation to 2000 meters
High-strength alloy over 2000 meters

Size:

32 inches long overall; 6-inch diameter
barrel with 20-inch guard frame

Weight:

Aluminum alloy case: 63 lbs in air; 21 lbs
in water
High pressure case: 155 lbs in air; 120 lbs
in water

Access to Chart:

Through double O-ring sealed end cap

Power:

Self-contained batteries provide (8 hours
continuous) operation; size AA rechargeable
nickel-cadmium; 10 batteries supplied with
unit unless other type specified

Accessories:

Each instrument supplied with batteries, two
rolls of chart paper and instruction manual.

RECORD NO.

STN 11

LOCATION

16:40
25-8-72


TIME

OPERATOR JMJ/DB

DATE

SERIAL NO.

REMARKS:

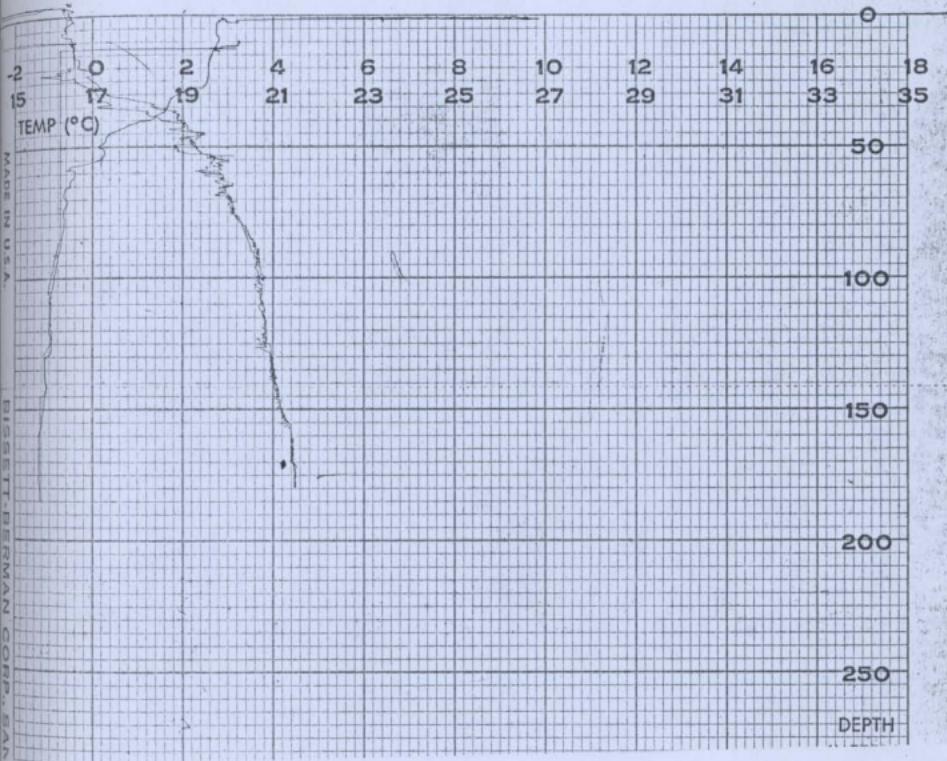

APPENDIX C

Contour Mapping Program

L 21

MAIN

DATE = 74065

86.
00/56/14

APPENDIX HOLDEN , OCEAN ENGINEERING , MEMORIAL UNIVERSITY OF NFLD. , CANADA.
IREYDA HOLDEN , 450 TOPSAIL RD. , ST. JOHN'S , NFLD. , CANADA PH 3689750

B HOLDEN OCEAN DENSITY CONTOURS (I.E. SIGHT CONTOURS) FEBRUARY 73
THESE DENSITIES WERE CALCULATED FROM READINGS TAKEN AT SAGLEK AUG 72

```
DIMENSION XA(1700) , YA(1700) , XB(1700) , YB(1700)  
DIMENSION YBP(1700) , SIG(30,400) , X(600) , Y(600)  
FORMAT ('11')  
FORMAT ( 16,15, F7,1, F6,1, 16, F7,2, 2F14.6, 16 )  
FORMAT ( 11, 9F10.2, 11//111111 )  
FORMAT ( 11, 3F10.2, 21B, // )  
FORMAT ( 3X,4HCALL,2X,4HPLOT,1BX,4HLIFT,2X,3HPEN )  
FORMAT ( 3X, SBEGIN,2X,4HSCAN )  
FORMAT ( 1X,15MLABRADOR COAST )  
FORMAT ( 1X,37NORTH MAG. TRUE N. DEPTH = ,13.7H METERS )  
FORMAT ( F4.1 )  
FORMAT ( 39H OCEAN DENSITY CONTOURS & AUG. 25 , 1972 )  
FORMAT ( 40X , 30H DIMENSION OVER RUN ERROR )  
D = 0
```

THE GIVEN AREA TO BE CONTOURED , WITH SIGHT VALUES , WILL BE CALLED "MATRIX".

M = THE NO. OF ROWS IN THE MATRIX.

N = THE NO. OF COLS IN THE MATRIX.

I,J = (X,Y) COORDINATES OF THE SIGHT READINGS IN THE MATRIX AREA.

K = INDEX OF THE INITIAL SCAN POINTS (XA(K),YA(K)).

TCO = CARDINALITY OF THE SET OF REMAINING SCAN POINTS.

L = INDEX OF THE POINTS ON THE CONTOUR LINE (XB(L),YB(L)).

A(K) = X COORDINATE OF A SCAN POINT.

Y(K) = Y COORDINATE OF A SCAN POINT.

B(L) = X COORDINATE OF A CONTOUR POINT.

R(L) = Y COORDINATE OF A CONTOUR POINT.

MIN = THE LOWEST CONTOUR LEVEL --- CMAX = THE HIGHEST CONTOUR LEVEL

DEL = THE INTERVAL BETWEEN CONTOUR LEVELS

CX = SCALE IN INCHES PER USER UNIT ON THE X(X) AXIS

CY = SCALE IN INCHES PER USER UNIT ON THE Y(Y) AXIS.

FAD THE DATA POINTS INTO THEIR CORRECT POSITIONS

```
DD 560 ITT = 1:15  
FORMAT( 12X , 30F4.0 )  
FORMAT( 12X , 30F4.0 )  
CHIN = 140.01  
CDEL = 20.0  
CMAX = 282.0  
M = 398  
N = 30  
SCY = .00
```

APPENDIX "C"

21

MAIN

DATE = 74065

87.

08/56/14

```
SCX = SCY
READ(81,84) (
CONTINUE
M00 = M-1

PRINT OUT THE MATRIX AS IT SHOULD LOOK
IS CHECKS THAT ALL THE SIGT VALUES HAVE BEEN ASSIGNED THE CORRECT COORDS.
PRINT 80
PRINT 94, D
PRINT 87, D
DO 16, J = 1, M, M00
PRINT 83, ( SIG(I,J), I=1,N ), J=1,M
IF (ITTE.LE.10) GO TO 56
CONTINUE
M00 = M-1
N00 = N-1
CALL PLOTR(10)
CALL SCALE (1,0,1,0,-10,0,-10,0)
CALL PLOT (1,1,0,8,0)
CALL SCALE (SCX,SCY,0,0,0,0)
CALL PLOT (1,1,0,-1,0)
CALL WAIT
DO 19 MGRID = 1,M,M00
GRIM = -MGRID
CALL GRID (0,1,0,GRIM,1,0,N00)
CONTINUE
ESE PLOT STATEMENTS DRAW A NORTH MAGNETIC ARROW FOR REFERENCE
IF (M.NE.3) GO TO 20
CALL PLOT (1,2,8,-.75)
CALL PLOT (2,2,9,-.7)
CALL PLOT (2,3,0,-.9)
CALL PLOT (2,3,3,-.7)
CALL CHAR (1.5,-.75,.1,.1,0,0)
WRITE (10,94) D
CALL CHAR (0,0,-1.25,.2,.2,1,0)
WRITE (10,93)
CALL CHAR (1,0,-0.60,.2,.2,0,0)
WRITE (10,96)
CONTINUE
FINE C AND SCAN THE PERIMETER & INTERIOR ROWS
C = CMIN
IS SCAN FINDS ALL POINTS WHERE THE 'C' CONTOUR INTERSECTS THESE ROWS
K = 0
L = 0
PRINT 92
J = 1

IS DO LOOP SCANS L TO R ACCROSS THE TOP BOUNDARY OF THE MATRIX
```

APPENDIX "C"

21

MAIN

DATE = 74065

88.

08/56/14

```
DO 23 I = 2, NDO, 1
IF ((C.GE.SIG(I,J)),AND,(C.LE.SIG (I+1,J))) GO TO 21
IF ((C.LE.SIG(I,J)),AND,(C.GE.SIG (I+1,J))) GO TO 21
GO TO 23
K = K+1
YA(K) = J
XA(K) = I + (C-SIG(I,J)) / (SIG(I+1,J)-SIG(I,J))
CONTINUE
I = N
```

HIS DO LOOP SCANS DOWN THE RIGHT HAND BOUNDARY OF THE MATRIX.

```
DO 27 J = 1, MDO, 1
IF ((C.GE.SIG(I,J)),AND,(C.LE.SIG(I,J+1))) GO TO 25
IF ((C.LE.SIG(I,J)),AND,(C.GE.SIG(I,J+1))) GO TO 25
GO TO 27
K = K+1
YA(K) = J + (C-SIG(I,J)) / (SIG(I,J+1)-SIG(I,J))
XA(K) = I
CONTINUE
J = M
```

HIS DO LOOP SCANS R TO L ACCROSS THE BOTTOM BOUNDARY OF THE MATRIX.

```
DO 31 KDO = 1, NDO
I = M+1 - KDO
IF ((C.GE.SIG(I,J)),AND,(C.LE.SIG(I-1,J))) GO TO 29
IF ((C.LE.SIG(I,J)),AND,(C.GE.SIG(I-1,J))) GO TO 29
GO TO 31
K = K+1
YA(K) = J
XA(K) = I - (C-SIG(I,J)) / (SIG(I-1,J)+SIG(I,J))
CONTINUE
I =
```

HIS DO LOOP SCANS UP THE LEFT HAND BOUNDARY OF THE MATRIX.

```
DO 35 KDO = 1, MDO
I = M+1-KDO
IF ((C.GE.SIG(I,J)),AND,(C.LE.SIG(I,J-1))) GO TO 33
IF ((C.LE.SIG(I,J)),AND,(C.GE.SIG(I,J-1))) GO TO 33
GO TO 35
K = K+1
YA(K) = J - (C-SIG(I,J)) / (SIG(I,J-1)-SIG(I,J))
XA(K) = I
CONTINUE
```

HIS DO LOOP SCANS L TO R THRU ALL CENTRE ROWS OF THE MATRIX.

```
DO 39 J = 2, MDO, 1
DO 39 I = 2, NDO, 1
IF ((C.GE.SIG(I,J)),AND,(C.LE.SIG (I+1,J))) GO TO 37
IF ((C.LE.SIG(I,J)),AND,(C.GE.SIG (I+1,J))) GO TO 37
GO TO 39
K = K+1
```

DATE = 740865

08/56/14

```

21      MAIN           DATE = 740865           08/56/14
X(A(K)) = I + (C*BIG(I,J)) / (BIG(I+1,J)-BIG(I,J))
YA(K) = J
CONTINUE
IF ( K.GE.1700)          GO TO 570
KT = K
P NO POINTS ARE FOUND ON THE ABOVE SCANS , GO TO 555.
IF ( KT.EQ.0)            GO TO 555
PRINT 91
CONTINUE
AKE-THE 1 ST POINT FROM THIS SET OF SCAN POINTS,
KTDO = KT
IF ( KTDO.LE.0 )          GO TO 555
K = 1
PRINT 98 , C , X(A(K)) , YA(K) , K , D
ROTATE THIS PT. TO OBTAIN THE (I,J) COORDS OF THE GRID BOX
I = X(A(K))
J = YA(K)
L = L + 1
TORE THIS 1 ST POINT AS (XE,YE) FOR FUTURE REFERENCE,
XE = X(A(K))
YE = YA(K)
HIS POINT IS THE 1 ST POINT ON THE CONTOUR , HENCE IT IS ALSO (XB,YB).
XB(L) = X(A(K))
YB(L) = YA(K)
CHANGE THE SIGN OF Y COORD FOR THE SAKE OF THE PLOT SUBROUTINE,
YRP(L) = -YB(L)
PRINT 98 , C , XB(L) , YRP(L) , L , D
IF ( M.GE.288)             GO TO 42
IF ( XB(L).EQ.0 )           GO TO 42
CLABL = C
IF ( CLABL.GE.100,0 )       CLABL = CLABL - 100,0
CALL CHAR (XB(L),YRP(L),,86,,86,0,0)
WRITE (10,95) CLABL
CONTINUE
CALL PLOT(1,XB(L),YRP(L))
KTDO = KTDO + 1
IF ( KTDO.LE.0 )          GO TO 3
HIS DO LOOP DELETED THE ABOVE MENTIONED POINT FROM THE SET OF SCAN POINT
DO 3   K = 1 , KTDO
XA(K) = X(A(K+1))
YA(K) = YA(K+1)
CONTINUE
(ELSE IF STATEMENTS DECIDE WHETHER THE CONTOUR IS GOING UP,DOWN,LEFT,RIGHT.
OCEED UP 400 , DOWN 200 , RIGHT 100 , LEFT 300 AS DIRECTED
IF ( ( I.EQ.1) .AND. ( -J.EQ.1))    GO TO 100
IF ( ( I.EQ.0) .AND. ( -J.EQ.1))    GO TO 300
IF ( ( I.EQ.1) .AND. ( -J.EQ.M))    GO TO 400

```

L 21

MAIN

DATE = 74065

90.

08/56/14

```
IF ( I .EQ. 1 ) GO TO 100
IF ( I .EQ. N ) GO TO 300
IF ( J .EQ. 1 ) GO TO 200
IF ( J .EQ. M ) GO TO 400
GO TO 200
```

THIS SET OF STATEMENTS (100..115) FIND THE NEXT POINT ON A CONTOUR WHICH IS GOING TO THE RIGHT.

WHEN THE NEXT POINT IS FOUND , THE APPROPRIATE SUBROUTINE IS CALLED, THE POINT IS CALCULATED , AND WE GO TO 500 TO CHECK THIS NEW POINT.

CONTINUE

```
IF ((C,GE,SIG(I,J)),AND,(C,LE,SIG(I+1,J))) GO TO 101
IF ((C,LE,SIG(I,J)),AND,(C,GE,SIG(I+1,J))) GO TO 101
```

GO TO 105

```
CALL EAST (I,J,L,C,SIG(I,J),SIG(I+1,J),XB(L+1),YB(L+1))
YBP(L) = -YB(L)
```

```
CALL PLOT(2,XB(L),YBP(L))
```

GO TO 500

I = I+1

```
IF ((C,LE,SIG(I,J)),AND,(C,GE,SIG(I,J+1))) GO TO 106
IF ((C,GE,SIG(I,J)),AND,(C,LE,SIG(I,J+1))) GO TO 106
```

GO TO 110

```
CALL SOUTH (I,J,L,C,SIG(I,J),SIG(I,J+1),XB(L+1),YB(L+1))
YBP(L) = -YB(L)
```

```
CALL PLOT(2,XB(L),YBP(L))
```

GO TO 500

J = J+1

```
IF ((C,LE,SIG(I,J)),AND,(C,GE,SIG(I-1,J))) GO TO 111
IF ((C,GE,SIG(I,J)),AND,(C,LE,SIG(I-1,J))) GO TO 111
```

GO TO 115

```
CALL WEST (I,J,L,C,SIG(I,J),SIG(I-1,J),XB(L+1),YB(L+1))
YBP(L) = -YB(L)
```

```
CALL PLOT(2,XB(L),YBP(L))
```

GO TO 500

IF THERE IS NO "NEXT POINT" ,

TERMINATE THIS CONTOUR ; GO BACK TO 2 / AND TAKE THE NEXT SCAN POINT.

GO TO 2

THIS SET OF STATEMENTS (200..215) FIND THE NEXT POINT ON A CONTOUR WHICH IS GOING DOWN.

WHEN THE NEXT POINT IS FOUND , THE APPROPRIATE SUBROUTINE IS CALLED, THE POINT IS CALCULATED , AND WE GO TO 500 TO CHECK THIS NEW POINT.

I = I+1

```
IF ((C,LE,SIG(I,J)),AND,(C,GE,SIG(I,J+1))) GO TO 201
IF ((C,GE,SIG(I,J)),AND,(C,LE,SIG(I,J+1))) GO TO 201
```

GO TO 205

```
CALL SOUTH (I,J,L,C,SIG(I,J),SIG(I,J+1),XB(L+1),YB(L+1))
YBP(L) = -YB(L)
```

21 MAIN DATE = 74865 08/56/14

```

CALL PLOT(2,XB(L),YBP(L))
GO TO 500
J = J+1
IF ((C.LE,SIG(I,J)),AND,(C.GE,SIG(I-1,J))) GO TO 206
IF ((C.GE,SIG(I,J)),AND,(C.LE,SIG(I-1,J))) GO TO 206.
GO TO 210
CALL WEST (I,J,L,C,SIG(I,J),SIG(I-1,J),XB(L+1),YB(L+1))
YBP(L) = -YB(L)
CALL PLOT(2,XB(L),YBP(L))
GO TO 500
I = I-1
IF ((C.LE,SIG(I,J)),AND,(C.GE,SIG(I,J-1))) GO TO 211
IF ((C.GE,SIG(I,J)),AND,(C.LE,SIG(I,J-1))) GO TO 211
GO TO 215
CALL NORTH (I,J,L,C,SIG(I,J),SIG(I,J+1),XB(L+1),YB(L+1))
YBP(L) = -YB(L)
CALL PLOT(2,XB(L),YBP(L))
GO TO 500
IF THERE IS NO "NEXT POINT"
IF TERMINATE THIS CONTOUR, GO BACK TO 2 AND TAKE THE NEXT SCAN POINT.
GO TO 2

THIS SET OF STATEMENTS (300-315) FIND THE NEXT POINT ON A CONTOUR
WHICH IS GOING TO THE LEFT.
WHEN THE NEXT POINT IS FOUND, THE APPROPRIATE SUBROUTINE IS CALLED,
THE POINT IS CALCULATED, AND WE GO TO 500 TO CHECK THIS NEW POINT.
J = J+1
IF ((C.LE,SIG(I,J)),AND,(C.GE,SIG(I-1,J))) GO TO 301
IF ((C.GE,SIG(I,J)),AND,(C.LE,SIG(I-1,J))) GO TO 301
GO TO 305
CALL WEST (I,J,L,C,SIG(I,J),SIG(I-1,J),XB(L+1),YB(L+1))
YBP(L) = -YB(L)
CALL PLOT(2,XB(L),YBP(L))
GO TO 500
I = I+1
IF ((C.LE,SIG(I,J)),AND,(C.GE,SIG(I,J-1))) GO TO 306
IF ((C.GE,SIG(I,J)),AND,(C.LE,SIG(I,J-1))) GO TO 306
GO TO 310
CALL NORTH (I,J,L,C,SIG(I,J),SIG(I,J-1),XB(L+1),YB(L+1))
YBP(L) = -YB(L)
CALL PLOT(2,XB(L),YBP(L))
GO TO 500
J = J+1
IF ((C.LE,SIG(I,J)),AND,(C.GE,SIG(I+1,J))) GO TO 311
IF ((C.GE,SIG(I,J)),AND,(C.LE,SIG(I+1,J))) GO TO 311
GO TO 315
CALL EAST (I,J,L,C,SIG(I,J),SIG(I+1,J),XB(L+1),YB(L+1))
YBP(L) = -YB(L)

```

21

MAIN

DATE = 74065

08/56/14

CALL PLOT(2,XB(L),YBP(L))
 GO TO 500
 IF THERE IS NO "NEXT POINT"
 - TERMINATE THIS CONTOUR , GO BACK TO 2 , AND TAKE THE NEXT SCAN POINT.
 GO TO 2 .

THIS SET OF STATEMENTS (400,415) FIND THE NEXT POINT ON A CONTOUR
 WHICH IS GOING UP.
 WHEN THE NEXT POINT IS FOUND , THE APPROPRIATE SUBROUTINE IS CALLED,
 THE POINT IS CALCULATED , AND WE GO TO 500 TO CHECK THIS NEW POINT.

CONTINUE
 IF ((C.LE.SIG(I,J)),AND,(C.GE.SIG(I,J-1))) GO TO 401
 IF ((C.GE.SIG(I,J)),AND,(C.LE.SIG(I,J-1))) GO TO 401
 GO TO 405
 CALL NORTH -(I,J,L,C,SIG(I,J),SIG(I,J-1),XB(L+1),YB(L+1))
 YBP(L) = -YB(L)
 CALL PLOT(2,XB(L),YBP(L))
 GO TO 500
 J = J-1
 IF ((C.GE.SIG(I,J)),AND,(C.LE.SIG(I+1,J))) GO TO 406
 IF ((C.LE.SIG(I,J)),AND,(C.GE.SIG(I+1,J))) GO TO 406
 GO TO 410
 CALL EAST -(I,J,L,C,SIG(I,J),SIG(I+1,J),XB(L+1),YB(L+1))
 YBP(L) = -YB(L)
 CALL PLOT(2,XB(L),YBP(L))
 GO TO 500
 I=I+1
 IF ((C.LE.SIG(I,J)),AND,(C.GE.SIG(I,J+1))) GO TO 411
 IF ((C.GE.SIG(I,J)),AND,(C.LE.SIG(I,J+1))) GO TO 411
 GO TO 415
 CALL SOUTH -(I,J,L,C,SIG(I,J),SIG(I,J+1),XB(L+1),YB(L+1))
 YBP(L) = -YB(L)
 CALL PLOT(2,XB(L),YBP(L))
 GO TO 500
 IF THERE IS NO "NEXT POINT"
 - TERMINATE THIS CONTOUR , GO BACK TO 2 , AND TAKE THE NEXT SCAN POINT.
 GO TO 2
 IF (KTDO.LE.0) GO TO 506
 DO .504 K = 1,KTDO
 KTD = K
 IF THIS NEW POINT (XB,YB)=ANY POINT ALREADY IN THE SCAN SET,
 THEN DELETE IT FROM THE SCAN SET AND CONTINUE.
 DIFYA = ABB*(YAK(K)-YB(L))
 DIFXA = ABB*(XAK(K)-XB(L))
 IF (DIFXA.LT.(-.0001) ..AND. DIFYA.LT. (.0001)) GO TO 505
 CONTINUE
 GO TO 506
 KTDO = KTDO -1

21

MAIN

DATE = 74065

08/56/14

```

IF (KTD0,LE,8)      GO TO 586
DO-586 K = KTD + KTD0
XA(K) = XA(K+1)
YA(K) = YA(K+1)
CONTINUE
IF ( L.GE.1700)      GO TO 578
HECK IF POINT IS INITIAL OR BOUNDARY POINT AND CONTINUE
DIFXE = ABS(XB(L)-XE)
DIFYE = ABS(YB(L)-YE)
F THIS NEW POINT (XB,YB) IS THE 1 ST POINT (XE,YE),
E TERMINATE THIS CONTOUR, GO BACK TO 2 , AND TAKE THE NEXT SCAN POINT,
IF ( DIFXE.LT.(.0001),AND,DIFYE.LT. (.0001))      GO TO 2
F THIS NEW POINT (XB,YB) IS ON THE BORDER OF THE MATRIX,
E TERMINATE THIS CONTOUR , GO BACK TO 2 , AND TAKE THE NEXT SCAN POINT,
IF (XB(L).EQ.1,OR,XB(L).EQ,N)      GO TO 2
IF (YB(L).EQ.1,OR,YB(L).EQ,M)      GO TO 2
CONTINUE
HECK WHICH DIRECTION THE CONTOUR IS GOING "NONE" ,UP,DOWN,LEFT,RIGHT ?
I = XB(L)
J = YB(L)
IF (YB(L).EQ.INT(YB(L)))      GO TO 527
IF (XB(L).EQ.INT(XB(L)))      GO TO 517
IF (XB (L).LT,XB (L-1))      GO TO 388
IF (XB (L).GT,XB (L-1))      GO TO 100
IF (YB(L).LT,YB(L-1))      GO TO 400
IF (YB(L).GT,YB(L-1))      GO TO 288
GO TO 2
CONTINUE
INCREASE "C" BY .2 (STANDARD OCEANOGRAPHIC STEP) AND GO TO NEXT CONTOUR,
C = C + COEL
IF (C.EQ.180.01)      C = 180.01
IF (C.LE.CMAX)      GO TO 17
CONTINUE
GO TO 571
PRINT 97
CONTINUE
CALL 'QUIT'
STOP
END

```

APPENDIX "C"

L 21 EAST DATE = 74065 08/56/14
SUBROUTINE EAST (I,J,L,C,SIGA,SIGB,XBB,YBB)
FORMAT (111, 3F10.2, 21B , //)
L = L + 1
XBB = I + (C-SIGA)/(SIGB-SIGA)
YBB = J
RETURN
END

L 21 WEST DATE = 74065 88/56/14
SUBROUTINE WEST (I,J,L,C,SIGA,SIGB,XBB,YBB)
FORMAT (111, 3F10.2, 21B, //)
L = L + 1
XBB = I - (C-SIGA)/(SIGB-SIGA)
YBB = J
RETURN
END

APPENDIX "C"

L 21

NORTH:

DATE = 74065

96.

08/56/14

```
SUBROUTINE NORTH: (I,J,L,C,SIGA,SIGB,XBB,YBB)
FORMAT ( I,I, 3F10.2, 2I8 , // )
L = L + 1
XBB = I
YBB = J - (C-SIGA)/(SIGB-SIGA)
RETURN
END
```

APPENDIX "C"

L 21

SOUTH

DATE = 74065

197
08/56/14

SUBROUTINE SOUTH. (I,J,L,C,SIGA,SIGB,XBB,YBB)
FORMAT (I,I, 3F10.2, 2I8, //)
L = L + 1
XBB = I
YBB = J
RETURN
END

APPENDIX "C".

APPENDIX D

Tables

of

Salinity

Temperature

Depth

Density

σ_t -Values

SAGLEK S.T.D. DATA AUG. 11-13, 1972

| DEPTH | STN | TEMP | SAL | SGMO | SGHT | DENSITY |
|-------|-----|------|------|-------|-----------|----------|
| 0 | 1 | 3.4 | 38.9 | 24.62 | 24.693210 | 1.024663 |
| 0 | 10 | 1.8 | 38.7 | 24.66 | 24.588811 | 1.024566 |
| 0 | 23 | 3.8 | 38.6 | 24.98 | 24.399355 | 1.024399 |
| 0 | 2 | 4.5 | 38.8 | 24.11 | 23.882358 | 1.023882 |
| 0 | 11 | 2.2 | 38.4 | 24.63 | 24.318760 | 1.024311 |
| 0 | 24 | 3.8 | 31.3 | 25.15 | 24.962987 | 1.024963 |
| 0 | 3 | 4.2 | 38.8 | 24.11 | 23.831039 | 1.023831 |
| 0 | 12 | 3.1 | 31.0 | 24.91 | 24.717499 | 1.024710 |
| 0 | 25 | 4.8 | 31.0 | 24.91 | 24.637817 | 1.024638 |
| 0 | 4 | 3.5 | 38.2 | 24.27 | 24.851598 | 1.024852 |
| 0 | 13 | 3.8 | 31.0 | 24.91 | 24.725662 | 1.024726 |
| 0 | 26 | 3.6 | 31.4 | 25.23 | 24.998219 | 1.024990 |
| 0 | 5 | 3.5 | 38.9 | 24.62 | 24.594452 | 1.024594 |
| 0 | 14 | 3.1 | 31.2 | 25.07 | 24.875656 | 1.024876 |
| 0 | 27 | 3.8 | 31.5 | 25.31 | 25.050842 | 1.025051 |
| 0 | 6 | 3.3 | 31.0 | 24.91 | 24.788699 | 1.024781 |
| 0 | 15 | 2.6 | 31.0 | 24.91 | 24.781745 | 1.024742 |
| 0 | 28 | 3.1 | 31.2 | 25.07 | 24.875656 | 1.024876 |
| 0 | 7 | 3.2 | 31.2 | 25.07 | 24.867264 | 1.024867 |
| 0 | 16 | 2.6 | 38.8 | 24.74 | 24.588898 | 1.024589 |
| 0 | 29 | 3.2 | 38.9 | 24.62 | 24.620224 | 1.024620 |
| 0 | 8 | 2.6 | 38.5 | 24.58 | 24.351242 | 1.024351 |
| 0 | 17 | 3.8 | 38.6 | 24.58 | 24.366241 | 1.024366 |
| 0 | 38 | 3.3 | 38.6 | 24.58 | 24.374725 | 1.024375 |

SAGLEK S.T.D. DATA AUG. 11-13, 1972

| DEPTH | STN | TEMP | SAL | BGHO | SGHT | DENSITY |
|-------|-----|------|------|-------|-----------|----------|
| 10 | 1 | 8.3 | 31.3 | 25.15 | 25.136871 | 1.025137 |
| 10 | 10 | 8.2 | 31.1 | 25.00 | 24.991592 | 1.024992 |
| 10 | 23 | 8.2 | 30.9 | 24.82 | 24.811737 | 1.024812 |
| 10 | 2 | 1.6 | 30.7 | 24.66 | 24.578430 | 1.024578 |
| 10 | 11 | 2.2 | 31.0 | 24.91 | 24.786774 | 1.024787 |
| 10 | 24 | 2.4 | 31.0 | 25.23 | 25.089386 | 1.025089 |
| 10 | 3 | 3.3 | 30.9 | 24.82 | 24.611786 | 1.024612 |
| 10 | 12 | 2.0 | 31.3 | 25.15 | 25.038895 | 1.025039 |
| 10 | 25 | 3.1 | 31.0 | 24.91 | 24.717499 | 1.024718 |
| 10 | 4 | 2.7 | 31.2 | 25.07 | 24.987959 | 1.024988 |
| 10 | 13 | 2.8 | 31.4 | 25.23 | 25.058411 | 1.025058 |
| 10 | 26 | 3.0 | 31.7 | 25.07 | 25.279434 | 1.025279 |
| 10 | 5 | 3.4 | 31.0 | 24.91 | 24.692078 | 1.024692 |
| 10 | 14 | 2.6 | 31.5 | 25.31 | 25.153366 | 1.025153 |
| 10 | 27 | 1.7 | 31.8 | 25.55 | 25.456436 | 1.025456 |
| 10 | 6 | 3.1 | 31.3 | 25.15 | 24.954742 | 1.024955 |
| 10 | 15 | 1.8 | 31.3 | 25.15 | 25.052468 | 1.025052 |
| 10 | 28 | 3.2 | 31.5 | 25.31 | 25.184416 | 1.025184 |
| 10 | 7 | 1.3 | 31.3 | 25.15 | 25.084091 | 1.025084 |
| 10 | 16 | 1.0 | 31.2 | 25.07 | 25.021686 | 1.025022 |
| 10 | 29 | 3.0 | 31.3 | 25.15 | 24.962997 | 1.024963 |
| 10 | 8 | -8.2 | 31.6 | 25.39 | 25.398308 | 1.025398 |
| 10 | 17 | 2.7 | 31.1 | 25.00 | 24.838669 | 1.024839 |
| 10 | 30 | 2.7 | 31.1 | 25.00 | 24.838669 | 1.024839 |

APPENDIX D

SAGLEK S.T.D. DATA AUG. 11-13, 1972

| DEPTH | STN | TEMP | SAL | SGHD | SGHT | DENSITY |
|-------|-----|------|------|-------|------------|----------|
| 20 | 1 | -8.5 | 31.6 | 25.39 | 25.089485 | 1.025409 |
| 20 | 10 | -8.5 | 31.5 | 25.31 | 25.329330 | 1.025329 |
| 20 | 23 | -8.9 | 31.4 | 25.23 | 25.261963 | 1.025262 |
| 20 | 2 | -8.4 | 31.5 | 25.31 | 25.325051 | 1.025326 |
| 20 | 11 | -8.9 | 31.9 | 25.63 | 25.663376 | 1.025663 |
| 20 | 24 | 1.8 | 31.6 | 25.39 | 25.348393 | 1.025340 |
| 20 | 3 | -8.2 | 31.5 | 25.31 | 25.318257 | 1.025318 |
| 20 | 12 | -1.8 | 32.2 | 25.87 | 25.987196 | 1.025907 |
| 20 | 25 | 1.1 | 31.7 | 25.47 | 25.414459 | 1.025414 |
| 20 | 4 | 0.8 | 32.0 | 25.71 | 25.710007 | 1.025710 |
| 20 | 13 | -1.4 | 32.4 | 26.00 | 26.088867 | 1.026089 |
| 20 | 26 | 0.5 | 32.2 | 25.87 | 25.846885 | 1.025846 |
| 20 | 5 | -2.5 | 31.5 | 25.31 | 25.161072 | 1.025161 |
| 20 | 14 | 0.8 | 31.8 | 25.55 | 25.550003 | 1.025550 |
| 20 | 27 | -0.7 | 32.3 | 25.95 | 25.977798 | 1.025978 |
| 20 | 6 | -0.2 | 31.8 | 25.35 | 25.558426 | 1.025558 |
| 20 | 15 | 1.2 | 31.7 | 25.47 | 25.488493 | 1.025408 |
| 20 | 20 | -2.0 | 32.0 | 25.71 | 25.598681 | 1.025595 |
| 20 | 7 | -1.0 | 31.8 | 25.55 | 25.585953 | 1.025586 |
| 20 | 16 | -2.4 | 31.6 | 25.39 | 25.247955 | 1.025248 |
| 20 | 29 | 0.4 | 31.4 | 25.23 | 25.212158 | 1.025212 |
| 20 | 8 | -1.1 | 32.0 | 25.71 | 25.7494350 | 1.025749 |
| 20 | 17 | 0.1 | 31.6 | 25.39 | 25.385757 | 1.025386 |
| 20 | 30 | 1.2 | 31.4 | 25.23 | 25.169586 | 1.025178 |

SAGLEK S.T.D. DATA AUG. 11-13, 1972

| DEPTH | STN | TEMP | SALT | SGMT | DENSITY |
|-------|-----|------|------|-------|----------|
| 30 | 1 | -8.7 | 31.7 | 25.47 | 1.025496 |
| 30 | 10 | -1.1 | 31.8 | 25.55 | 1.025589 |
| 30 | 23 | -1.5 | 31.8 | 25.55 | 1.025591 |
| 30 | 2 | -1.0 | 32.2 | 25.87 | 1.025987 |
| 30 | 11 | -1.5 | 32.1 | 25.79 | 1.025840 |
| 30 | 24 | -1.1 | 32.2 | 25.87 | 1.025918 |
| 30 | 3 | -1.2 | 32.2 | 25.87 | 1.025913 |
| 30 | 12 | -1.4 | 32.4 | 26.84 | 1.026089 |
| 30 | 25 | -8.5 | 32.0 | 25.71 | 1.025730 |
| 30 | 4 | -1.3 | 32.3 | 25.95 | 1.025996 |
| 30 | 13 | -1.4 | 32.5 | 26.11 | 1.026159 |
| 30 | 26 | -8.9 | 32.4 | 26.84 | 1.026075 |
| 30 | 5 | -8.3 | 31.9 | 25.63 | 1.025642 |
| 30 | 14 | -1.3 | 32.5 | 26.11 | 1.026157 |
| 30 | 27 | -1.5 | 32.5 | 26.11 | 1.026162 |
| 30 | 6 | -1.2 | 32.2 | 25.87 | 1.025913 |
| 30 | 15 | -8.4 | 32.2 | 25.87 | 1.025887 |
| 30 | 28 | -8.6 | 32.2 | 25.87 | 1.025894 |
| 30 | 7 | -1.4 | 32.1 | 25.79 | 1.025837 |
| 30 | 16 | -8.4 | 32.0 | 25.71 | 1.025691 |
| 30 | 29 | -8.6 | 32.2 | 25.87 | 1.025894 |
| 30 | 8 | -1.4 | 32.1 | 25.79 | 1.025837 |
| 30 | 17 | -1.8 | 32.0 | 25.71 | 1.025747 |
| 30 | 30 | -8.6 | 32.2 | 25.87 | 1.025894 |

SAGLER S.T.D. DATA AUG, 11-13, 1972

| DEPTH | STN | TEMP | SAL | BGHO | BGMT | DENSITY |
|-------|-----|------|------|-------|-----------|----------|
| 50 | 1 | +1.1 | 32.1 | 25.79 | 25.829788 | 1.025838 |
| 50 | 10 | +1.4 | 32.4 | 26.04 | 26.088867 | 1.026089 |
| 50 | 23 | +1.4 | 32.4 | 26.04 | 26.088867 | 1.026089 |
| 50 | 2 | +1.5 | 32.6 | 26.28 | 26.292258 | 1.026252 |
| 50 | 11 | +1.6 | 32.6 | 26.28 | 26.258587 | 1.026255 |
| 50 | 24 | +1.3 | 32.6 | 26.28 | 26.247192 | 1.026247 |
| 50 | 3 | +1.6 | 32.5 | 26.11 | 26.163971 | 1.026164 |
| 50 | 12 | +1.5 | 32.7 | 26.27 | 26.322662 | 1.026323 |
| 50 | 25 | +1.5 | 32.7 | 26.27 | 26.322662 | 1.026323 |
| 50 | 4 | +1.4 | 32.6 | 26.28 | 26.249756 | 1.026258 |
| 50 | 13 | +1.5 | 32.7 | 26.27 | 26.322662 | 1.026323 |
| 50 | 26 | +1.5 | 32.8 | 26.36 | 26.413193 | 1.026413 |
| 50 | 5 | +1.3 | 32.5 | 26.11 | 26.161728 | 1.026162 |
| 50 | 14 | +1.4 | 32.7 | 26.27 | 26.320129 | 1.026320 |
| 50 | 27 | +1.6 | 32.8 | 26.36 | 26.415543 | 1.026416 |
| 50 | 6 | +1.4 | 32.6 | 26.28 | 26.249756 | 1.026258 |
| 50 | 15 | +1.2 | 32.6 | 26.28 | 26.244461 | 1.026244 |
| 50 | 28 | +1.6 | 32.7 | 26.27 | 26.322492 | 1.026325 |
| 50 | 7 | +1.2 | 32.4 | 26.04 | 26.083718 | 1.026084 |
| 50 | 16 | +1.8 | 32.5 | 26.31 | 26.148132 | 1.026148 |
| 50 | 29 | +1.4 | 32.6 | 26.28 | 26.249756 | 1.026258 |
| 50 | 8 | +1.4 | 32.6 | 26.28 | 26.249756 | 1.026258 |
| 50 | 17 | +1.3 | 32.6 | 26.28 | 26.247192 | 1.026247 |
| 50 | 30 | +1.2 | 32.6 | 26.28 | 26.244461 | 1.026244 |

APPENDIX D

SAGLEK S.Y.D. DATA AUG. 11-13, 1972

| DEPTH | STN | TEMP | SAL | SGMO | SGHT | DENSITY |
|-------|-----|------|------|-------|-----------|----------|
| 75 | 1 | +1.4 | 32.3 | 25.95 | 25.998383 | 1.025998 |
| 75 | 10 | +1.5 | 32.6 | 26.28 | 26.252258 | 1.026252 |
| 75 | 23 | +1.5 | 32.7 | 26.27 | 26.322662 | 1.026323 |
| 75 | 2 | +1.8 | 32.8 | 26.36 | 26.419815 | 1.026428 |
| 75 | 11 | +1.7 | 32.7 | 26.27 | 26.327148 | 1.026327 |
| 75 | 24 | +1.5 | 32.8 | 26.36 | 26.413193 | 1.026413 |
| 75 | 3 | +1.5 | 32.8 | 26.36 | 26.413193 | 1.026413 |
| 75 | 12 | +1.5 | 32.8 | 26.36 | 26.413193 | 1.026413 |
| 75 | 25 | +1.5 | 32.8 | 26.36 | 26.413193 | 1.026413 |
| 75 | 4 | +1.4 | 32.8 | 26.36 | 26.410629 | 1.026411 |
| 75 | 13 | +1.4 | 32.8 | 26.36 | 26.410629 | 1.026411 |
| 75 | 26 | +1.4 | 32.9 | 26.43 | 26.481083 | 1.026481 |
| 75 | 5 | +1.4 | 32.7 | 26.27 | 26.328129 | 1.026328 |
| 75 | 14 | +1.4 | 32.8 | 26.36 | 26.410629 | 1.026411 |
| 75 | 27 | +1.5 | 32.9 | 26.43 | 26.483612 | 1.026484 |
| 75 | 6 | +1.4 | 32.8 | 26.36 | 26.410629 | 1.026411 |
| 75 | 15 | +1.5 | 32.8 | 26.36 | 26.413193 | 1.026413 |
| 75 | 28 | +1.6 | 32.8 | 26.36 | 26.415943 | 1.026416 |
| 75 | 7 | +1.4 | 32.7 | 26.27 | 26.328129 | 1.026328 |
| 75 | 16 | +1.5 | 32.8 | 26.36 | 26.413193 | 1.026413 |
| 75 | 29 | +1.4 | 32.8 | 26.36 | 26.410629 | 1.026411 |
| 75 | 8 | +1.8 | 32.7 | 26.27 | 26.388762 | 1.026389 |
| 75 | 17 | +1.5 | 32.8 | 26.36 | 26.488885 | 1.026488 |
| 75 | 30 | +1.3 | 32.8 | 26.36 | 26.488885 | 1.026488 |

SAGLER S.T.D. DATA AUG. 24-26, 1972

| DEPTH | STN | TEMP | SAL | SGHO | SGHT | DENSITY |
|-------|-----|------|------|-------|-----------|----------|
| 0 | 1 | 29 | 38.6 | 24.58 | 24.487379 | 1.024487 |
| 0 | 10 | 34 | 38.7 | 24.66 | 24.449221 | 1.024445 |
| 0 | 23 | 43 | 38.3 | 24.38 | 24.487989 | 1.024848 |
| 0 | 2 | 26 | 38.9 | 24.82 | 24.668121 | 1.024668 |
| 0 | 11 | 27 | 38.7 | 24.66 | 24.582098 | 1.024582 |
| 0 | 24 | 32 | 38.6 | 24.78 | 24.541168 | 1.024541 |
| 0 | 3 | 24 | 38.5 | 24.58 | 24.368967 | 1.024366 |
| 0 | 12 | 32 | 38.5 | 24.58 | 24.380031 | 1.024384 |
| 0 | 25 | 31 | 38.7 | 24.66 | 24.478383 | 1.024478 |
| 0 | 4 | 21 | 38.6 | 24.58 | 24.466431 | 1.024466 |
| 0 | 13 | 33 | 38.5 | 24.58 | 24.295715 | 1.024296 |
| 0 | 26 | 34 | 31.3 | 25.15 | 24.929062 | 1.024929 |
| 0 | 5 | 28 | 38.4 | 24.42 | 24.318487 | 1.024314 |
| 0 | 14 | 89 | 31.6 | 25.55 | 25.585478 | 1.025585 |
| 0 | 27 | 30 | 31.2 | 25.87 | 24.883881 | 1.024884 |
| 0 | 6 | 24 | 38.6 | 24.58 | 24.449236 | 1.024445 |
| 0 | 15 | 13 | 32.8 | 25.71 | 25.628616 | 1.025629 |
| 0 | 28 | 18 | 31.3 | 25.15 | 25.852468 | 1.025852 |
| 0 | 7 | 24 | 38.6 | 24.58 | 24.449236 | 1.024445 |
| 0 | 16 | 14 | 31.9 | 25.63 | 25.555496 | 1.025556 |
| 0 | 29 | 28 | 31.2 | 25.87 | 24.980085 | 1.024988 |
| 0 | 8 | 24 | 38.7 | 24.66 | 24.524521 | 1.024525 |
| 0 | 17 | 15 | 31.6 | 25.39 | 25.318425 | 1.025318 |
| 0 | 30 | 21 | 31.6 | 25.39 | 25.278028 | 1.025278 |
| 0 | 9 | 24 | 31.8 | 24.91 | 24.772263 | 1.024772 |
| 0 | 18 | 13 | 31.6 | 25.39 | 25.322986 | 1.025323 |
| 0 | 31 | 14 | 31.6 | 25.39 | 25.316772 | 1.025317 |

SAGLEK S.T.D. DATA AUG. 24-26, 1972

| DEPTH | STN | TEMP | SAL | SGMD | SGMT | DENSITY |
|-------|-----|------|------|-------|-----------|-------------|
| 10 | 1 | 2.5 | 30.9 | 24.79 | 24.645935 | 1.024646 28 |
| 10 | 18 | 3.2 | 30.4 | 24.43 | 24.234863 | 1.024235 29 |
| 10 | 23 | 3.6 | 30.7 | 24.66 | 24.427780 | 1.024428 30 |
| 10 | 2 | 2.2 | 31.0 | 24.91 | 24.786774 | 1.024787 31 |
| 10 | 11 | 2.6 | 30.8 | 24.74 | 24.588898 | 1.024589 32 |
| 10 | 24 | 3.2 | 30.8 | 24.74 | 24.541168 | 1.024541 33 |
| 10 | 3 | 2.1 | 30.6 | 24.58 | 24.466431 | 1.024466 34 |
| 10 | 12 | 2.4 | 30.7 | 24.66 | 24.524521 | 1.024525 35 |
| 10 | 25 | 3.0 | 30.8 | 24.74 | 24.557556 | 1.024558 36 |
| 10 | 4 | 1.7 | 31.0 | 24.91 | 24.828557 | 1.024821 37 |
| 10 | 13 | 2.5 | 31.0 | 24.91 | 24.764816 | 1.024765 38 |
| 10 | 26 | 3.3 | 31.2 | 25.87 | 24.858734 | 1.024859 39 |
| 10 | 5 | 1.2 | 30.6 | 24.58 | 24.522568 | 1.024523 40 |
| 10 | 14 | 0.9 | 31.0 | 25.55 | 25.505478 | 1.025505 41 |
| 10 | 27 | 3.0 | 31.2 | 25.87 | 24.883881 | 1.024884 42 |
| 10 | 6 | 2.1 | 30.7 | 24.66 | 24.545792 | 1.024546 43 |
| 10 | 15 | 1.4 | 32.1 | 25.79 | 25.714661 | 1.025715 44 |
| 10 | 28 | 1.8 | 31.4 | 25.23 | 25.131927 | 1.025132 45 |
| 10 | 7 | 1.8 | 31.0 | 24.91 | 24.814182 | 1.024814 46 |
| 10 | 16 | 1.3 | 31.0 | 25.63 | 25.561722 | 1.025562 47 |
| 10 | 29 | 2.6 | 31.4 | 25.23 | 25.874142 | 1.025074 48 |
| 10 | 8 | 2.2 | 30.8 | 24.74 | 24.618179 | 1.024618 49 |
| 10 | 17 | 1.4 | 31.0 | 25.39 | 25.316772 | 1.025317 50 |
| 10 | 30 | 2.0 | 31.5 | 25.31 | 25.197678 | 1.025198 51 |
| 10 | 9 | 2.3 | 31.0 | 24.91 | 24.779526 | 1.024788 52 |
| 10 | 18 | 1.2 | 31.0 | 25.39 | 25.328857 | 1.025329 53 |
| 10 | 31 | 1.4 | 31.5 | 25.31 | 25.237198 | 1.025237 54 |

SAGLEK S.T.D. DATA AUG. 24-26, 1972

| DEPTH | STN | TEMP | SAL | SGHO | SGHT | DENSITY |
|-------|-----|------|------|-------|-----------|-------------|
| 20 | 1 | 8.7 | 31.4 | 25.23 | 25.197189 | 1.025197 55 |
| 20 | 10 | 2.8 | 30.7 | 24.66 | 24.552582 | 1.024553 56 |
| 20 | 23 | 3.4 | 30.8 | 24.74 | 24.524216 | 1.024524 57 |
| 20 | 2 | 8.8 | 31.5 | 25.31 | 25.389998 | 1.025310 58 |
| 20 | 11 | 2.2 | 31.8 | 24.91 | 24.786774 | 1.024787 59 |
| 20 | 24 | 0.7 | 31.3 | 25.15 | 25.117416 | 1.025117 60 |
| 20 | 3 | 1.4 | 30.9 | 24.82 | 24.749817 | 1.024750 61 |
| 20 | 12 | 1.6 | 31.2 | 25.87 | 24.985947 | 1.024986 62 |
| 20 | 25 | 2.5 | 30.9 | 24.82 | 24.675659 | 1.024676 63 |
| 20 | 4 | 8.8 | 31.5 | 25.31 | 25.271759 | 1.025272 64 |
| 20 | 13 | 1.5 | 31.2 | 25.87 | 24.992249 | 1.024992 65 |
| 20 | 26 | 1.5 | 31.4 | 25.23 | 25.151337 | 1.025151 66 |
| 20 | 5 | 1.2 | 31.6 | 25.39 | 25.328857 | 1.025329 67 |
| 20 | 14 | 0.4 | 31.9 | 25.63 | 25.611542 | 1.025612 68 |
| 20 | 27 | 2.7 | 31.3 | 25.15 | 24.987152 | 1.024987 69 |
| 20 | 6 | 1.4 | 31.3 | 25.15 | 25.078849 | 1.025078 70 |
| 20 | 15 | 1.3 | 32.1 | 25.79 | 25.728932 | 1.025721 71 |
| 20 | 28 | 1.4 | 31.6 | 25.39 | 25.316772 | 1.025317 72 |
| 20 | 7 | 1.7 | 31.4 | 25.23 | 25.138489 | 1.025138 73 |
| 20 | 16 | 0.8 | 32.1 | 25.79 | 25.750298 | 1.025750 74 |
| 20 | 29 | 2.6 | 31.4 | 25.23 | 25.674142 | 1.025874 75 |
| 20 | 8 | 0.0 | 31.5 | 25.31 | 25.389998 | 1.025310 76 |
| 20 | 17 | 0.6 | 31.7 | 25.87 | 25.441772 | 1.025442 77 |
| 20 | 30 | 2.1 | 31.5 | 25.31 | 25.198659 | 1.025191 78 |
| 20 | 9 | 1.3 | 31.2 | 25.87 | 25.884486 | 1.025084 79 |
| 20 | 18 | 0.5 | 31.7 | 25.47 | 25.446854 | 1.025447 80 |
| 20 | 31 | 1.6 | 31.6 | 25.39 | 25.308001 | 1.025304 81 |

SAGLEK S.T.D. DATA AUG. 24-26, 1972

| DEPTH | STN | TEMP | SAL | SGHO | SGHT | DENSITY |
|-------|-----|------|------|-------|-----------|----------|
| 30 | 1 | -0.4 | 31.9 | 25.93 | 25.646347 | 1.025646 |
| 30 | 10 | 1.4 | 31.3 | 25.15 | 25.078849 | 1.025078 |
| 30 | 23 | 3.2 | 30.9 | 24.82 | 24.628224 | 1.024620 |
| 30 | 2 | -0.1 | 32.0 | 25.71 | 25.714310 | 1.025714 |
| 30 | 11 | 1.5 | 31.8 | 25.55 | 25.069528 | 1.025478 |
| 30 | 24 | -0.8 | 32.0 | 25.71 | 25.740887 | 1.025748 |
| 30 | 3 | -0.8 | 31.5 | 25.31 | 25.339142 | 1.025339 |
| 30 | 12 | 0.1 | 31.8 | 25.55 | 25.505708 | 1.025546 |
| 30 | 25 | 1.8 | 31.0 | 24.91 | 24.814182 | 1.024814 |
| 30 | 4 | 0.7 | 31.8 | 25.55 | 25.516342 | 1.025516 |
| 30 | 13 | -0.8 | 31.9 | 25.63 | 25.668141 | 1.025668 |
| 30 | 26 | -0.7 | 31.9 | 25.63 | 25.656921 | 1.025657 |
| 30 | 5 | -1.1 | 31.7 | 25.47 | 25.414459 | 1.025414 |
| 30 | 14 | 0.2 | 32.0 | 25.71 | 25.701058 | 1.025701 |
| 30 | 27 | 1.6 | 31.4 | 25.23 | 25.144974 | 1.025145 |
| 30 | 6 | 0.6 | 31.8 | 25.55 | 25.521591 | 1.025522 |
| 30 | 15 | 0.7 | 32.2 | 25.87 | 25.835488 | 1.025835 |
| 30 | 28 | 0.2 | 31.6 | 25.39 | 25.381382 | 1.025381 |
| 30 | 7 | 0.7 | 31.8 | 25.55 | 25.516342 | 1.025516 |
| 30 | 16 | 0.4 | 32.3 | 25.95 | 25.931846 | 1.025931 |
| 30 | 29 | 2.2 | 31.5 | 25.31 | 25.183472 | 1.025183 |
| 30 | 8 | 0.6 | 31.7 | 25.47 | 25.441772 | 1.025442 |
| 30 | 17 | 0.3 | 32.0 | 25.71 | 25.696228 | 1.025696 |
| 30 | 30 | 1.6 | 31.7 | 25.47 | 25.383514 | 1.025384 |
| 30 | 9 | -0.8 | 31.8 | 25.23 | 25.258881 | 1.025259 |
| 30 | 18 | 0.4 | 31.8 | 25.55 | 25.531662 | 1.025532 |
| 30 | 31 | 1.8 | 31.8 | 25.55 | 25.499771 | 1.025500 |

SAGLEK S.T.D. DATA AUG. 24-26, 1972

| DEPTH | STN | TEMP | SAL | SGHD | SOMT | DENSITY |
|-------|-----|------|------|-------|-----------|----------|
| 50 | 1 | -1.1 | 32.3 | 25.95 | 25.998479 | 1.025998 |
| 50 | 10 | -1.2 | 32.0 | 25.71 | 25.752167 | 1.025752 |
| 50 | 23 | 0.2 | 31.9 | 25.63 | 25.621109 | 1.025621 |
| 50 | 2 | -0.8 | 32.3 | 25.95 | 25.981140 | 1.025981 |
| 50 | 11 | -0.5 | 32.3 | 25.95 | 25.970566 | 1.025971 |
| 50 | 24 | -1.2 | 32.5 | 26.11 | 26.154053 | 1.026154 |
| 50 | 3 | -1.3 | 32.0 | 25.71 | 25.754780 | 1.025755 |
| 50 | 12 | -0.9 | 32.4 | 26.04 | 26.074814 | 1.026075 |
| 50 | 25 | -0.9 | 32.1 | 25.79 | 25.823929 | 1.025824 |
| 50 | 4 | 0.0 | 32.0 | 25.71 | 25.710007 | 1.025710 |
| 50 | 13 | -1.2 | 32.2 | 25.87 | 25.912918 | 1.025913 |
| 50 | 26 | -0.7 | 32.6 | 26.28 | 26.228485 | 1.026228 |
| 50 | 5 | 0.3 | 31.9 | 25.63 | 25.616318 | 1.025616 |
| 50 | 14 | -0.7 | 32.4 | 26.04 | 26.068039 | 1.026068 |
| 50 | 27 | -1.0 | 32.3 | 25.95 | 25.967518 | 1.025988 |
| 50 | 6 | -0.2 | 32.0 | 25.71 | 25.718532 | 1.025719 |
| 50 | 15 | 0.1 | 32.5 | 26.11 | 26.185484 | 1.026105 |
| 50 | 28 | -0.4 | 31.9 | 25.63 | 25.646347 | 1.025646 |
| 50 | 7 | 0.0 | 32.0 | 25.71 | 25.710007 | 1.025710 |
| 50 | 16 | 0.1 | 32.6 | 26.28 | 26.195450 | 1.026195 |
| 50 | 29 | 0.1 | 32.0 | 25.71 | 25.705643 | 1.025706 |
| 50 | 8 | -0.4 | 32.1 | 25.79 | 25.886595 | 1.025887 |
| 50 | 17 | -0.2 | 32.3 | 25.95 | 25.958740 | 1.025959 |
| 50 | 30 | -0.2 | 32.1 | 25.79 | 25.798615 | 1.025799 |
| 50 | 9 | -0.7 | 32.2 | 25.87 | 25.897583 | 1.025898 |
| 50 | 18 | -0.5 | 32.2 | 25.87 | 25.898411 | 1.025898 |
| 50 | 31 | -0.4 | 32.2 | 25.87 | 25.886719 | 1.025887 |

SAGLER S.T.D. DATA AUG. 24-26, 1972

| DEPTH | STN. | TEMP | SAL | SGMD | SGHT | DENSITY |
|-------|------|------|------|-------|-----------|----------|
| 75 | 1 | -1.2 | 32.5 | 26.11 | 26.154853 | 1.026154 |
| 75 | 10 | -1.2 | 32.4 | 26.84 | 26.083710 | 1.026084 |
| 75 | 23 | -1.4 | 32.7 | 26.27 | 26.328129 | 1.026320 |
| 75 | 2 | -1.4 | 32.7 | 26.27 | 26.328129 | 1.026320 |
| 75 | 11 | -1.8 | 32.7 | 26.27 | 26.308762 | 1.026389 |
| 75 | 24 | -1.6 | 32.8 | 26.36 | 26.015543 | 1.026416 |
| 75 | 3 | -1.3 | 32.4 | 26.84 | 26.086380 | 1.026086 |
| 75 | 12 | -1.8 | 32.7 | 26.27 | 26.308762 | 1.026389 |
| 75 | 25 | -1.8 | 32.6 | 26.28 | 26.238480 | 1.026238 |
| 75 | 4 | -0.9 | 32.5 | 26.11 | 26.145050 | 1.026145 |
| 75 | 13 | -0.9 | 32.6 | 26.28 | 26.235367 | 1.026235 |
| 75 | 26 | -0.7 | 32.7 | 26.27 | 26.298676 | 1.026299 |
| 75 | 5 | -1.8 | 32.4 | 26.84 | 26.077066 | 1.026078 |
| 75 | 14 | -1.8 | 32.6 | 26.28 | 26.238480 | 1.026238 |
| 75 | 27 | -1.1 | 32.7 | 26.27 | 26.311844 | 1.026312 |
| 75 | 6 | -0.7 | 32.5 | 26.11 | 26.138229 | 1.026138 |
| 75 | 15 | -0.6 | 32.7 | 26.27 | 26.295013 | 1.026295 |
| 75 | 28 | -1.2 | 32.6 | 26.28 | 26.244461 | 1.026244 |
| 75 | 7 | -0.7 | 32.5 | 26.11 | 26.138229 | 1.026138 |
| 75 | 16 | -0.6 | 32.6 | 26.36 | 26.385223 | 1.026385 |
| 75 | 29 | -0.6 | 32.7 | 26.27 | 26.295013 | 1.026295 |
| 75 | 8 | -0.6 | 32.5 | 26.11 | 26.141632 | 1.026142 |
| 75 | 17 | -0.7 | 32.6 | 26.28 | 26.228485 | 1.026228 |
| 75 | 30 | -0.6 | 32.5 | 26.11 | 26.138644 | 1.026135 |
| 75 | 9 | -0.6 | 32.4 | 26.84 | 26.071411 | 1.026071 |
| 75 | 18 | -0.6 | 32.6 | 26.28 | 26.224854 | 1.026225 |
| 75 | 31 | -0.6 | 32.4 | 26.84 | 26.064484 | 1.026064 |



