
# PALAEOMAGNETISM OF THE SKINNER COVE FORMATION OF WESTERN NEWFOUNDLAND AND THE BIRTH OF THE IAPETUS OCEAN

CENTRE FOR NEWFOUNDLAND STUDIES

# TOTAL OF 10 PAGES ONLY MAY BE XEROXED

(Without Author's Permission)

PHILIP JOHN ALBERT McCAUSLAND

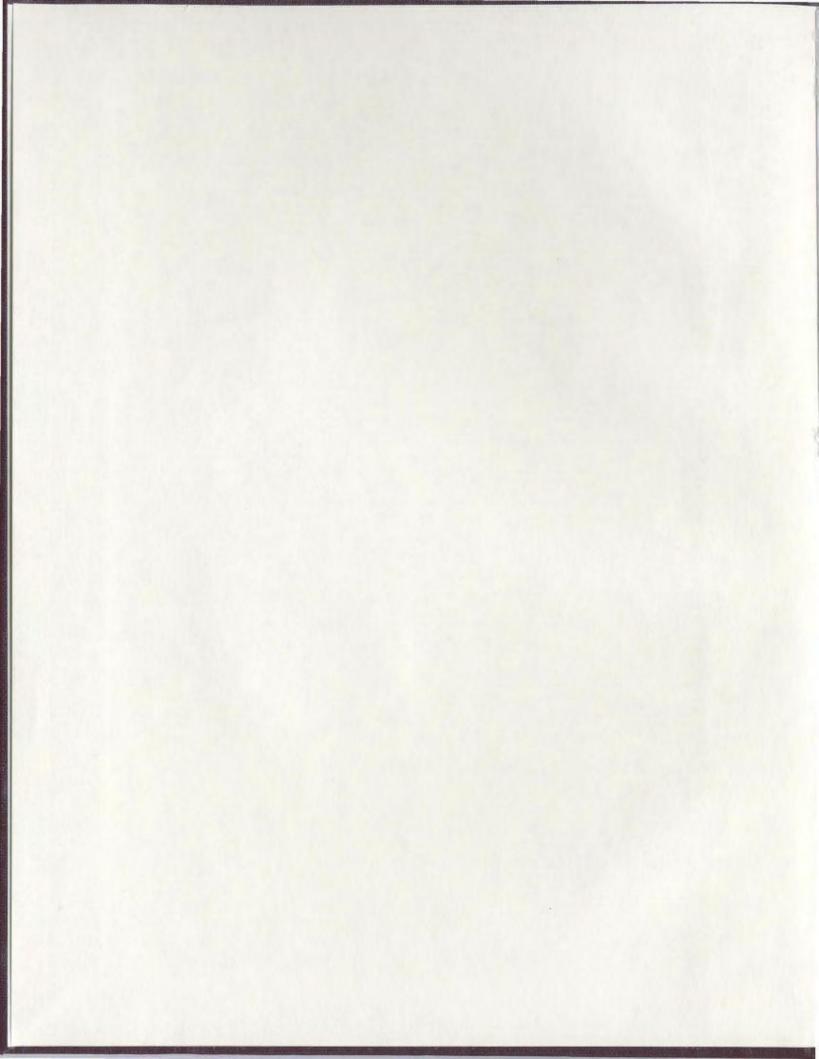

**INFORMATION TO USERS** 

This manuscript has been reproduced from the microfilm master. UMI

films the text directly from the original or copy submitted. Thus, some

thesis and dissertation copies are in typewriter face, while others may be

from any type of computer printer.

The quality of this reproduction is dependent upon the quality of the

copy submitted. Broken or indistinct print, colored or poor quality

illustrations and photographs, print bleedthrough, substandard margins,

and improper alignment can adversely affect reproduction.

In the unlikely event that the author did not send UMI a complete

manuscript and there are missing pages, these will be noted. Also, if

unauthorized copyright material had to be removed, a note will indicate

the deletion.

Oversize materials (e.g., maps, drawings, charts) are reproduced by

sectioning the original, beginning at the upper left-hand corner and

continuing from left to right in equal sections with small overlaps. Each

original is also photographed in one exposure and is included in reduced

form at the back of the book.

Photographs included in the original manuscript have been reproduced

xerographically in this copy. Higher quality 6" x 9" black and white

photographic prints are available for any photographs or illustrations

appearing in this copy for an additional charge. Contact UMI directly to

order.

UMI

A Bell & Howell Information Company
300 North Zeeb Road, Ann Arbor MI 48106-1346 USA
313/761-4700 800/521-0600

# Palaeomagnetism of the Skinner Cove Formation of Western Newfoundland and the birth of the Iapetus Ocean.

by

Philip John Albert McCausland

A thesis submitted to the School of Graduate Studies in partial fulfilment of the requirements for the degree of Master of Science (Geology)

Department of Earth Sciences

Memorial University of Newfoundland

March 1998

St. John's

Newfoundland



National Library of Canada

Acquisitions and Bibliographic Services

395 Wellington Street Ottawa ON K1A 0N4 Canada Bibliothèque nationale du Canada

Acquisitions et services bibliographiques

395, rue Wellington Ottawa ON K1A 0N4 Canada

Your file Votre référence

Our file Notre reférence

The author has granted a nonexclusive licence allowing the National Library of Canada to reproduce, loan, distribute or sell copies of this thesis in microform, paper or electronic formats.

The author retains ownership of the copyright in this thesis. Neither the thesis nor substantial extracts from it may be printed or otherwise reproduced without the author's permission.

L'auteur a accordé une licence non exclusive permettant à la Bibliothèque nationale du Canada de reproduire, prêter, distribuer ou vendre des copies de cette thèse sous la forme de microfiche/film, de reproduction sur papier ou sur format électronique.

L'auteur conserve la propriété du droit d'auteur qui protège cette thèse. Ni la thèse ni des extraits substantiels de celle-ci ne doivent être imprimés ou autrement reproduits sans son autorisation.

0-612-34205-0



#### ABSTRACT

The 550 Ma Skinner Cove Formation is a structural unit within the Humber Arm Allochthon of western Newfoundland, occurring as an alkali volcanic suite affected only by zeolite facies metamorphism. At 10 sites from its flows and dykes a magnetite-borne, stable characteristic 'A' remanence direction (tilt-corrected mean  $D=144^{\circ}$ ,  $I=31.5^{\circ}$ ;  $\alpha_{95}=10.8^{\circ}$ , k=21.1) is recognized and shown to be a primary thermal remanence by an intraformational conglomerate test. The palaeolatitude calculated for the Skinner Cove Formation from its ten 'A' site virtual geomagnetic poles is  $18.6^{\circ}$ S  $\pm 9^{\circ}$ .

An original relation between the Skinner Cove Formation and the Iapetan margin of Laurentia is suggested by several lines of evidence: As a structural slice it occupies a lower, less transported position in the Humber Arm Allochthon, implying an original adjacency to underlying slices of Laurentian margin sediments. The Skinner Cove volcanics have a within-plate trace element geochemistry with enriched light rare earth elements (LREE), shared with other alkali volcanics of the northeastern Appalachians Humber Zone. Also, the ~550 Ma Skinner Cove volcanics are of similar age to alkali magmatic activity of Laurentia's Iapetan margin, marked by the ~554 Ma Tibbit Hill metavolcanics of Quebec and the ~555 Ma Lady Slipper Pluton of west Newfoundland. Hence, the 18.6°S palaeolatitude of the Skinner Cove Formation constrains Laurentia to an equatorial position at ~550 Ma.

Comparison with other palaeomagnetically determined high southerly palaeolatitudes for ~570 Ma implies a large rapid northward drift of ~34 cm/yr for Laurentia during the latest Neoproterozoic. The start of Laurentia's rapid northward movement at ~570 Ma may mark

the beginning of Iapetus sea-floor spreading, consistent with Laurentian geological data if thermally-delayed subsidence of the Laurentian margin is assumed. Further well-constrained palaeomagnetic results of ~580 ~550 Ma age from Laurentia and especially its suspected conjugate margins Amazonia and Rio de la Plata are required to test this proposed palaeogeography and to define the birth of the Iapetus Ocean precisely.

#### ACKNOWLEDGEMENTS:

Somehow, I knew that I would end up writing this at two in the morning on Christmas Eve. I am surrounded by my friends, and some of them are working for me. The University closes for the holidays at noon. More on this later...!

As I am about to leave home to start another thesis project (a glutton for punishment, I guess), my thoughts are most with my parents, Reginald and Jean McCausland, who have supported me throughout with their love and generosity. I owe them much more than any thanks I can write here. My sisters, both near (Cathy) and soon-to-be near (Sue) gave me gentle advice, humour, and boots when necessary.

I gratefully acknowledge the opportunity to pursue this research under the inspiration and direction of Dr. Joseph Hodych, my very patient thesis supervisor. His support, both financial and otherwise, has been vital to this work and to the burgeoning of my own interests. It's been a lot of fun, and I hope someday to be able to repay the debt in kind.

The production of the thesis was largely assisted by Ray Patzold, who continues to impress me by overcoming each week's learning curve (diagrams and figures were produced with at least four programs, of variable stability). Sherri Jordan, Allison Gollop, Karen Patzold, and Letitia Peckford also helped with the layout of tables, and with the measurement of samples along the way. Parks Canada kindly issued permits to collect palaeomagnetic samples; I hope that this work becomes a lasting contribution to the understanding and enjoyment of beautiful Gros Morne National Park.

I am indebted to many people for discussions surrounding the study of

palaeomagnetism and the possible geography of the late Neoproterozoic, among them Conall MacNiociall, Greg Dunning, Garry Quinlan, Peter Cawood, Chuck Hurich, Ernie Deutsch, Wulf Gose, Ken Buchan and Richard Ernst. And the discussion continues...

Ken Sooley provided able and amiable field assistance during sample collection in the fall of 1995, and also is a dear friend with a ready humour, and a knack for asking the right questions. Keith Morris, Adam and Amanda Bragg, Damien Spracklin, and Jason King pulled the late-night shift to be here in the end. I'd like to thank Amanda for her care and support; I'm going to miss being here.

Cheers,

-pjam

Keith, on Palaeozoic plate relations: "Africa is a distant cousin to Laurentia, several times removed."

## **TABLE OF CONTENTS**

ABSTRACT ii
ACKNOWLEDGEMENTS iv
TABLE OF CONTENTS vi
LIST OF TABLES viii
LIST OF FIGURES ix
LIST OF PLATES x
CHAPTER 1: INTRODUCTION
1.1 PURPOSE AND SCOPE
1.2 REGIONAL SETTING
1.3 GENERAL GEOLOGY OF THE SKINNER COVE FORMATION 3
CHAPTER 2: PALAEOMAGNETISM METHODS AND RESULTS
2.1 PALAEOMAGNETISM SAMPLING AND METHODS
2.2 PALAEOMAGNETISM RESULTS
2.3 ROCK MAGNETISM
CHAPTER 3: TESTS FOR PRIMARY REMANENCE
3.1 FOLD TEST
3.2 INTRAFORMATIONAL CONGLOMERATE TEST
3.3 PRIMARY REMANENCE AND EVIDENCE FOR AN OVERPRINT 22

# **CHAPTER 4: DISCUSSION**

4.	1	RELA	TION TO LAURENTIA 2	29
4.	2	LATE	NEOPROTEROZOIC PALAEOMAGNETISM OF LAURENTIA . 3	3
4.	3	IMPLI	ICATIONS FOR TIMING OF IAPETUS OPENING 3	38
		4.3.1	PALAEOMAGNETIC CONSTRAINTS	łO
		4.3.2	GEOLOGICAL CONSTRAINTS 4	13
		4.3.3	IS A CA.570 MA BIRTH OF IAPETUS COMPATIBLE WITH	
			THE GEOLOGY?4	<b>‡</b> 7
4.4	4	LATE	NEOPROTEROZOIC PALAEOGEOGRAPHY	56
CHAP1	ГЕР	R 5: C0	ONCLUDING REMARKS 6	50
REFER	ŒN	1CES		53
APPEN	Ш	X A	7	74

# LIST OF TABLES

TABLE 1:	Average major and trace element abundances, Skinner Cove Formation 7
TABLE 2:	Skinner Cove Formation palaeomagnetic results
TABLE 3:	Palaeolatitude of the west Newfoundland Iapetan margin between 580 Ma and
	510 Ma calculated from published poles for Laurentia

# FIGURE LIST

FIGURE 1: Outcrop sketch map and sampled sites of the Skinner Cove Formation 4
FIGURE 2: Comparison of alternating field and thermal demagnetizations for the four
volcanic compositions of the Skinner Cove Formation
FIGURE 3: Orthogonal vector plots of alternating field and thermal demagnetization of
representative samples from conglomerate test clasts
FIGURE 4: Equal area stereoplots of conglomerate tests
FIGURE 5; Equal area stereoplot of the tilt-corrected 'A' component site mean 27
FIGURE 6: Tectonic discrimination plot of Nb-Zr-Y, for the Skinner Cove Formation 30
FIGURE 7: Distribution of selected late Neoproterozoic rift-related and magmatic features
of Laurentia's Iapetan margin
FIGURE 8: Palaeolatitude plot of the west Newfoundland portion of Laurentia's Iapetar
margin between 580 Ma and 510 Ma
FIGURE 9: Proposed late Neoproterozoic palaeogeography for 575 Ma and 550 Ma . 57

# LIST OF PLATES

PLATE 1: Photomicrograph of titanomagnetite grains in an amygdaloidal basalt clast . 1	17
PLATE 2: Blocky trachybasalt and rounded amygdaloidal (alkali) basalt clasts	
sampled from an intraformational tuff for the conglomerate test	20

#### Chapter 1: Introduction

#### 1.1 Purpose and scope

Earth in the late Neoproterozoic featured supercontinental breakup and reorganization (Bond et al., 1984) which may have influenced the timing of the emergence and early evolution of macroscopic animals. These events may have been triggered by mechanisms sensitive to palaeogeography such as changes in palaeoclimate (Young, 1995), seawater chemistry and oceanic circulation (Brasier, 1992; Nicholas, 1996), and burial of organic carbon (Knoll and Walter, 1992). The opening of the Iapetus Ocean (Harland and Gayer, 1972), creating an east-west subtropical seaway, might be a key palaeogeographic change which aided the diversification of life (Valentine and Moores, 1970).

Recently several late Neoproterozoic continental reconstructions have been proposed (Hoffman, 1991; Dalziel, 1991; 1992; 1997; Torsvik et al., 1996), offering insights on worldwide palaeogeographic and palaeoclimatic conditions during this seminal period of Earth's history. However, more Neoproterozoic geological and palaeomagnetic data are needed to better constrain the relative positions and movements of cratons involved in the breakup of the supercontinent Rodinia (McMenamin and McMenamin-Schulte, 1990), and in the final dispersal of the proposed late Neoproterozoic supercontinent Pannotia (Powell, 1995; Dalziel, 1997). The need for clarification is especially acute for a craton such as Laurentia, which likely had a high absolute plate velocity during the dispersal (Meert et al., 1993; Gurnis and Torsvik, 1994).

A test for the late Neoproterozoic position of Laurentia in palaeocontinental reconstructions is offered by the ca. 550 Ma flows and dykes of the Skinner Cove Formation in western Newfoundland. Preliminary palaeomagnetic data in abstract form only (Beaubouef et al., 1988; McCausland et al., 1996) are available for these rocks. This work reports on the palaeomagnetism of the volcanics, and discusses their role in constraining the position of the newly formed Iapetus margin of Laurentia, the timing of Iapetus opening, and the palaeogeography of the latest Neoproterozoic.

#### 1.2 Regional setting

In western Newfoundland the Humber Zone of the Appalachian Orogen records the history of the ancient Laurentian continental margin through the opening and closure of the Iapetus Ocean (Williams, 1975), involving late Proterozoic rifting, the Cambrian formation of a stable carbonate platform and its subsequent foundering during the obduction of mid-Ordovician (Taconic) allochthons. The largest of these allochthons is the Humber Arm Allochthon (Stevens, 1970), which consists of five lithologically distinct slice assemblages collected in an imbricate stack (Williams, 1995).

The Skinner Cove Formation comprises the lowermost, least displaced igneous slice assemblage in the Humber Arm Allochthon (Williams, 1975), and overlies melanges and transported slices of Laurentian shelf slope sediments in the Humber Arm Supergroup (Stevens, 1970). The Skinner Cove Formation and correlative units are overlain by higher

igneous slice assemblages of island arc volcanics and back-arc ophiolites (Jenner et al., 1991), of which the ophiolite units are topmost and farthest-travelled (Williams, 1975).

Transport of the Skinner Cove Formation appears to have started with its inclusion in the mid-Ordovician assembly of the Humber Arm Allochthon imbricate stack and emplacement onto the Laurentian margin (Williams, 1975). Further movement of some 100-200 km may have occurred in the late Silurian during further cratonward transport of much of western Newfoundland (Stockmal and Waldron, 1993). The structural position of the Skinner Cove Formation in the allochthon as well as its geochemistry and age suggest that it formed close to the Iapetan margin of Laurentia, as will be discussed later.

#### 1.3 General geology of the Skinner Cove Formation

The Skinner Cove Formation (Williams, 1975) was first identified (and mapped) by Troelsen (1947) as the Skinner Cove Volcanics. Rocks of the Skinner Cove Formation are best revealed in coastal bluff and wave cut platform exposures beneath the Table Mountain massif along the frontal edge of the Humber Arm Allochthon. The field area is accessible by a ~4.5 km long trail from highway 431 between Trout River and Woody Point, within the boundary of Gros Morne National Park (Figure 1).

Skinner Cove volcanic rocks are a differentiated assemblage of interlayered volcanic and volcaniclastic units cut by subvolcanic dykes. Most units are laterally discontinuous, remarkably fresh and relatively undeformed, dipping steeply to the

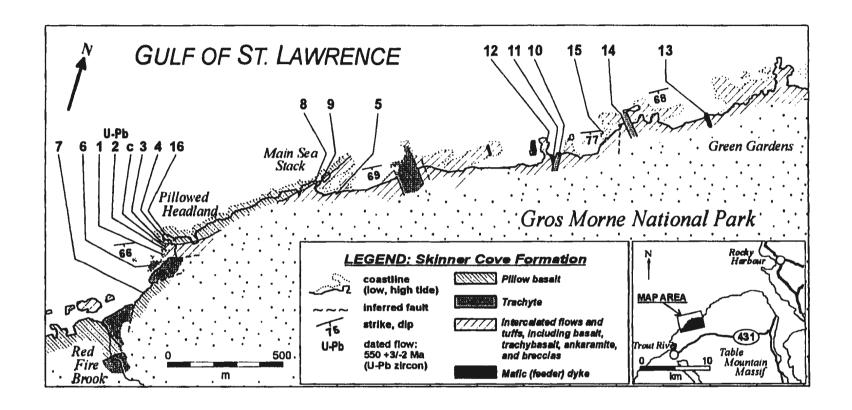


Figure 1. Outcrop sketch map and sampled sites of the Skinner Cove Formation (adapted from Baker, 1979). Regional relation of the Skinner Cove Formation with late Neoproterozoic alkali units of the northeast Appalachians Humber Zone is shown in Figure 7.

southeast and trending northeast-southwest, parallel to the coast.

Units of the type area Trout River slice have been defined in three members: a basal Main Sea Stack member, an extensively brecciated and volcaniclastic rich Wallace Brook member, and the trachyte-only Red Fire Brook member (Baker, 1979). No basal or top contact relations are observed for any of the three members, and their stratigraphic order is established by other local field relations. Little to no penetrative deformation is present in units of the type area Trout River Slice (Baker, 1979; Williams, 1995). Total thickness of the Skinner Cove Formation volcanic pile is estimated at 0.8 km (Baker, 1979).

Four main volcanic compositions are present in the members: Ankaramite, alkali basalt, trachybasalt, and trachyte. The more distinctive lithologies present include: black pillow basalts with limestone filled interstices, purple trachybasalt and dark ankaramite flows, red volcanic breccias, reworked volcanic lastic tuffs with volcanic clasts, brecciated basalt fragments in calcite cement, and massive trachyte.

Major element geochemistry performed on the Skinner Cove volcanics (Strong, 1974; Baker, 1979) shows all rock types present to be strongly alkalic. TiO2 content is typically high in the alkali basalts, averaging 3.24% by weight. Trace element concentrations determined by X-Ray Fluorescence (Baker, 1979) show alkali basalts to have elevated LREE relative to chondrite, with Nb averaging 70 ppm, La 99 ppm, Ce 163 ppm. Zr concentration averages 233 ppm in alkali basalts, and Zr/Y ratios are high,

ranging from 5.4 to 12.4, indicating an original alkalic magmatic affinity. Major and trace element abundances are summarized from Baker (1979) in Table 1.

Zeolite facies metamorphism is indicated by the presence of brown fibrous zeolite and analcime-quartz in ankaramite, and analcime-quartz in other rock types. While minor epidote and pumpellyite have been identified in trachyte, this is interpreted to be due to the felsic chemical composition, rather than an indicator of metamorphic condition (Baker, 1979).

Brachiopod fragments and graptolites which implied a late Cambrian-early Ordovician age for the Skinner Cove Formation (Williams, 1975), have since been determined to come from a melange that is not in stratigraphic continuity with other rocks of the formation (Williams, 1995). A U-Pb zircon age of 550.5 +3/-2 Ma (McCausland, 1995) has been obtained from an ankaramite flow (site 2) in the volcanic pile, and is reported in Cawood and others (submitted). The sampled ankaramite flow lies atop greater than 100m thickness of flows and interlayered, reworked tuffs and breccias (Baker, 1979). Hence, the ca. 550 Ma date obtained from the zircons likely represents the age of the Skinner Cove Formation.

U-Pb sampling, 14 of the 16 palaeomagnetic sites, and the conglomerate test were drawn from units of the Main Sea Stack member (Figure 1). Site 7 was obtained from pillow basalt of the Wallace Book member, while site 6 was obtained from trachyte of the Red Fire Brook member. The two trachyte dykes sampled from the Main Sea Stack

Table1: Average major and trace element abundances, Skinner Cove Formation \*

	Ankaramite**		Alkal	i Basalt	Trach	ybasalt	Trachyte		
	av.	s.d.	av.	s.d.	av.	s.d.	av.	s.d.	
SiO <sub>2</sub>	40.74	1.16	44.46	2.28	50.16	2.05	60.04	1.74	
TiO <sub>2</sub>	3.68	0.57	3.24	0.53	1.74	0.52	0.25	0.23	
Al <sub>2</sub> O <sub>3</sub>	13.19	0.88	15.65	0.89	16.73	0.69	18.49	0.55	
Fe <sub>2</sub> O <sub>3</sub>	7.29	1.04	5.49	2.04	4.38	1.68	2.57	1.03	
FeO	5. <b>5</b> 6	1.03	5.8	1.34	4.80	1.65	1.88	0.64	
MnO	0.22	0.12	0.29	0.16	0.18	0.06	0.16	0.05	
MgO	8.37	2.04	5.14	1.43	3.41	1.54	1.03	0.74	
CaO	11.88	1.53	7.13	1.61	4.21	1.81	1.31	0.72	
Na <sub>2</sub> O	2.22	0.41	4.08	0.84	4.64	1.08	5.56	1.31	
K₂O	0.64	0.32	1.58	0.73	3.27	1.95	5.93	1.75	
P <sub>2</sub> O <sub>5</sub>	0.72	0.10	1.10	0.41	0.81	0.17	0.07	0.03	
LOI	4.84	0.92	5.50	1.29	4.82	1.14	2.52	0.79	
Total	99.34	0.71	99.46	0.98	99.15	0.93	99.80	1.18	
Zr	205.9	8.8	233.2	89.7	310.3	60.9	761.3	307.7	
Sr	687.7	142.2	740.0	274.3	638.1	164.9	228.9	109.0	
Rb	8.4	5.6	18.1	8. <i>5</i>	33.9	22.0	81.4	34.0	
Zn	108.4	7.1	119.5	8.4	133.4	11.8	144.9	30.4	
Ba	296.2	62.5	823.7	673.2	1503.1	1803.0	431.0	145.3	
Nb	46.3	4.3	70.5	13.6	104.9	14.8	203.4	47.2	
Ga	18.3	1.1	19.4	2.4	20.1	1.4	19.9	4.9	
Рь	6.1	0.3	6.8	0.6	7.4	0.7	10.1	1.7	
Ni	139.3	101.0	19.9	21.4	11.1	7.5	16.1	4.2	
La	74.1	4.2	99.2	18.3	121.1	121.1 15.1 177.5		25.9	
Cr	152.5	127.6	26.5	28.6	6.0				
V	262.1	15.3	188.7	53.3	83.6	41.0	4.3	2.6	
Y	19.8	1.1	22.7	1.6	26.3	2.9	36.6	7.4	
Cc	112.9	9.9	157.0	29.0	194.9	26.4	313.3	146.7	
n	10	_	23		10		8		

Averaged from analyses presented in Baker (1979). n = number of samples averaged

<sup>\*</sup> Major element abundances in wt %; trace element abundances in ppm

<sup>\*\*</sup> Ankaramite average includes three Ti-rich "pyroxene phyric basalt" samples

member (sites 10, 14) may represent feeder dykes for the Red Fire Brook member. The numbering of sample sites in Figure 1 has no stratigraphic significance.

#### Chapter 2: Palaeomagnetic methods and results

## 2.1 Palaeomagnetic sampling and methods

Ninety-seven oriented block samples were collected for palaeomagnetic study from the 16 sites shown in Figure 1. Each site is represented by at least six samples. In addition, 36 oriented block samples were collected for an intraformational conglomerate test from volcanic clasts in a reworked tuff. Block samples were oriented with the aid of a sun compass. Strike and dip at each site were determined from interbedded tuffs. Cylindrical specimens with 2.4 cm diameter and 2.1 cm length were cut from the oriented samples in the laboratory.

Remanent magnetizations in the oriented specimens were measured using a Schonstedt SSM-1 spinner magnetometer. A specimen from each block sample was subjected to stepwise alternating-field (AF) demagnetization using a Schonstedt demagnetizer GSD-1. Some specimens (at least one per site) were subjected to stepwise thermal demagnetization using a Schonstedt TSD-1 demagnetizer. The remanence direction and intensity were measured after each step in demagnetization and are listed in Appendix A for each sample.

Orthogonal vector plots of the detailed stepwise demagnetizations allowed straight line segments to be identified by visual inspection (Zijderveld, 1967), and to be quantitatively resolved with principal-component analysis (Kirschvink, 1980).

#### 2.2 Palaeomagnetic results

Examples of typical demagnetization behaviour for samples from the four main rock types of the Skinner Cove volcanics are shown in tilt-corrected orthogonal vector plots (Figure 2).

A trachybasalt sample from site 3 (Figure 2a) exhibits an initial change in direction during AF demagnetization with the removal of a small viscous component, but above ~20 mT (200 Oe) the remanence maintains a southeasterly down direction as intensity decreases towards the vector plot origin. Thermal demagnetization of a second specimen from the same block sample shows similar behaviour (Figure 2b), with remanence above ~300°C showing little change in its southeasterly down direction. A pair of alkali basalt specimens from a site 4 block sample show broadly similar demagnetization characteristics, with a southeast and down magnetization isolated at coercivities higher than 25 mT (Figure 2c) and at unblocking temperatures higher than 300°C (Figure 2d).

Demagnetizations of trachyte samples tended to be more complex, with behaviours broadly divisible into two families on the basis of NRM intensity. Trachyte with higher NRM intensity (~1 A/m) was evident in nine out of the 22 trachyte samples from three sites, including all six samples of site 6. These nine samples exhibit a low-coercivity remanence that decays towards the origin of an orthogonal vector plot, dominated by a soft viscous magnetization which is mostly removed by 30 mT. Thermal demagnetization and careful AF demagnetization reveal a hard, southeast and down directed remanence of

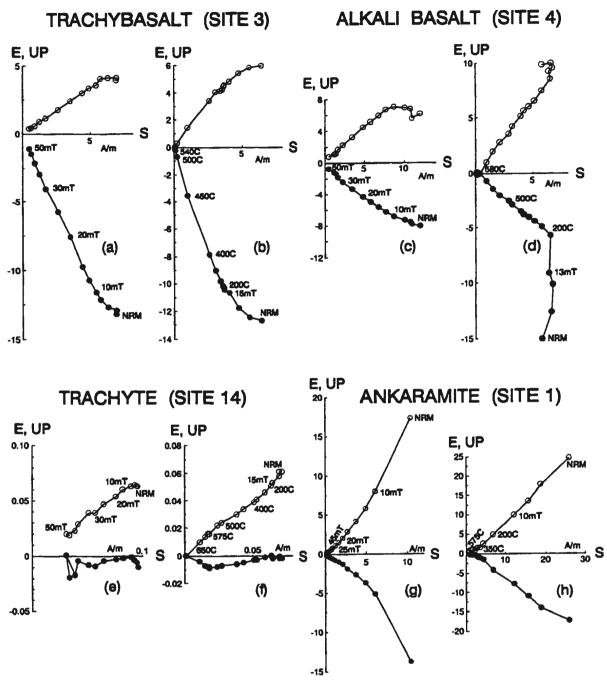


Figure 2. Comparison of alternating field (AF) demagnetizations (a,c,e,g) with thermal demagnetizations (b,d,f,h) for specimens from a site 3 trachybasalt sample (a),(b), a site 4 alkali basalt sample (c),(d), a site 14 trachyte sample (e),(f), and a site 1 ankaramite sample (g),(h). Thermal demagnetizations were preceded by AF demagnetization to 10-15 mT, as indicated. Orthogonal vector plots show decay projected in the UP-S (E-S) plane with closed (open) circles.

typically less than 20% NRM intensity which persists to coercivities of ~50 mT and unblocking temperatures of ~540°C. Thirteen lower NRM intensity trachyte samples (.1 to .01 A/m), including all six from site 10, are difficult to interpret (Figure 2e,f), as the remanence intensity approaches the resolution of the demagnetization and measurement techniques. During AF demagnetization (e.g. Figure 2e), measured remanence directions become unstable at coercivities above ~35 mT, or are undiminished by further AF treatment, suggesting the presence of a haematite-based component. Thermal demagnetization resolves a component between 575°C and 675°C that decays to the origin, corresponding to a component magnetization based in haematite (Figure 2f).

Ankaramite block samples typically exhibit a low coercivity and unblocking temperature remanence, which is removed by ~25 mT or 350°C. In block samples from site 1, an additional remanence of typically less than 20% NRM intensity with a southeast and down direction is resolved at higher coercivity and unblocking temperatures to ~45 mT and 575°C (Figure 2g,h).

The soft viscous remanent magnetization (VRM) initially removed in the specimens of Figure 2 is present in most block samples, and is resolvable in forty-seven. VRM appears to be fully removed by AF demagnetization to 20 mT or thermal demagnetization to 300°C in most specimens. However, a few specimens required 30 mT or 400°C to completely remove VRM. Specimen VRMs typically have a north, steep down in-situ direction, with Formation mean  $D=351^{\circ}$ ,  $I=72.4^{\circ}$  ( $\alpha_{95}=8.2^{\circ}$  k=36.2, N=10 sites). This

direction is similar to the present Earth field direction (D=335,  $I=72^{\circ}$ ) at the sampling sites, and is likely of recent origin.

For 25 specimens, the existence of any component beyond a VRM could not be resolved due to remanence above 25 mT or 350°C being unstable or too weak to be measured. In the other 71 specimens, a stable remanence direction is resolvable by least squares line fitting to vector plots, excluding coercivities below 20 mT and unblocking temperatures below 300°C to avoid contribution from VRM.

A tilt-corrected southeast and down characteristic remanence (here called the `A' component) is resolved in 62 of the specimens with stable remanence, of which 57 contribute to 10 `A' site means (Table 2). It is recognized as a high coercivity and unblocking temperature component that usually decays linearly towards the origin of a vector plot. The `A' component is fully removed between 520°C and 580°C, showing that it is likely carried by magnetite.

Stable component magnetizations carried by magnetite with directions other than 'A' have been identified in ten specimens. Four specimens at site 7 retain a high coercivity, high unblocking temperature west-southwest and up 'B' component (all directions tilt corrected) which is distinct from VRM and decays toward the origin (Table 2). All five specimens from site 8 along with one sample from site 16 display a high coercivity, high unblocking temperature southeast, up 'C' component. These other component directions do not coexist with the 'A' component in any specimen or sample.

Table 2: Skinner Cove Formation palaeomagnetic results

	Site	Rock type	Str	Dip	N	A/T	D	Ī	D'	ľ	α 95	k
			(°)	(°)			_(°)	(°)	(°)	(°)	(°)_	
<b>A</b> :	6	Trachyte	073	80	6	A&T	17.2	78.2	155.9	19.7	14.0	23.7
	1	Ankaramite	057	70	5	Α	98.3	89.3	146.5	19.5	12.0	41.9
	3	Trachybasalt	062	67	6	A&T	341.3	56.3	142.7	56.0	9.2	54.4
	4	Alkali Basalt	062	67	5	Α	7.4	71.4	138.5	37.6	5.6	188.9
	9	Alkali Basalt	044	69	6	Α	314.8	72.7	133.6	38.3	10.7	40.4
	5	Alkali Basalt	044	69	6	A&T	310.6	51.0	138.3	59.8	13.9	24.1
	12	Ankaramite	053	62	2	A&T	205.4	81.8	150.9	24.0		
	11	Mafic Dyke	057	56	4	A&T	207.6	80.3	156.7	28.8	17.5	28.6
	10	Trachyte Dyke	057	56	3	A&T	151.2	70.1	148.8	14.1	30.2	17.8
	15	Trachybasalt	059	77	5	A&T	345.0	79.4	145.8	23.2	8.5	81.9
	14	Trachyte Dyke	059	72	9	A&T	219.1	87.8	151.1	17.2	11.1	22.4
	13_	Matic Dyke	050	80	5	A&T	16.1	77.2	128.9	16.9	14.5	28.7_
MEA	N OF 10	'A' SITES - IN	V SITU				336.7	78.0			9.7	25.9
		TI	LT COI	RRECT	ΈD				144.4	31.5	10.8	21.1
B:	7	Alkali Basalt	020	78	4	Α	143.2	-38.2	247.3	-50.5	12.7	53.0
C:	8	Alkali Basalt	044	69	5	A&T	153.5	18.4	161.2	-46.2	20.7	14.6
	16	Mafic Dyke	062	67	1	_ T	151.8	23.6	151.8	-43.4		

<sup>\*</sup>Sites 10, 12 not used for calculating mean of "A" sites due to insufficient number of samples

Str, Dip = Strike, Dip in degrees of bedding used for tilt correction; N = number of samples which contribute to the site mean; A/T = AF or Thermal demagnetizations; D, I = Declination and Inclination in situ; D', I' = Declination and Inclination after tilt correction;  $\alpha_{95} =$  circle of 95% confidence about mean direction; k = precision parameter estimate

There appears to be a small magnetization component held by haematite, resolved with thermal demagnetization above 600°C in seven specimens from 6 sites. The resolved haematite magnetization directions define a horizontal swath from southwest to southeast when tilt corrected, and do not seem to have a clear relation to any one of the magnetite-based components.

#### 2.3 Rock magnetism

Curie balance heatings in a 100 mT field for 16 samples representing all four rock types drawn from the ten sites with `A' component remanence and the conglomerate test clasts show that magnetite is the dominant magnetic mineral. Observed Curie points range from ~530°C for the trachyte to ~580°C for most samples of other rock types. A fraction of haematite is also identified in five specimens which remain slightly magnetic at temperatures between 580°C and 640°C. Intensities of magnetization measured during cooling are similar to those found during heating, implying that there is little creation or destruction of magnetic phases during thermal demagnetization.

Hysteresis loops were traced for several samples from ankaramite, alkali basalt, trachybasalt, and trachyte. In all cases the ratio of saturation remanence to saturation magnetization suggests that the magnetite is dominantly pseudo-single domain, rather than single domain.

Backscatter electron microscopy with capability of semi-quantitative analysis was

used to examine polished sections from the four rock types. Large (80  $\mu$ m) magnetite grains in alkali basalt, trachybasalt and ankaramite samples are finely subdivided by intergrowth with a titanium-rich phase, likely ilmenite. Typically, grains in trachyte are smaller (~10  $\mu$ m), and contain less Ti than similar grains in the more mafic volcanics, but show patchy Ti-enriched portions which may be due to unresolved exsolution lamellae. Most larger magnetite grains in the alkali pillow basalt (site 4), ankaramite (site 1), and an amygdaloidal basalt conglomerate test clast had ilmenite lamellae in their cores, with titanium-free cracks and margins and a rim of rutile grains (Plate 1).



Plate 1. Backscatter photomicrograph of amygdaloidal clast 18794-2 typical titanomagnetite grains. Rutile occurs as a dark phase along grain boundaries and cracks, while magnetite is brightest, hosting darker grey Fe-Ti rich patches which may represent areas of ilmenite lamellae development.

#### Chapter 3: Tests for primary remanence

#### 3.1 Fold test

For this study, there is no significant change in the clustering of the 10 characteristic `A' component site mean directions when tilt correction is applied. The fold test is thus inconclusive, as expected since there is little variation in bedding attitude throughout the exposed section.

Previous palaeomagnetic work on the Skinner Cove volcanics is summarized in an abstract by Beaubouef et al. (1988). They report a palaeolatitude of ~12°S and a "large declination anomaly" for remanence of Skinner Cove volcanics from a site at Beverley Head, a nearby slice under the North Arm massif. The presence of Skinner Cove volcanics with similar tilt corrected remanence inclination, but different declination implies that the characteristic remanence predates relative tectonic rotation of the slices in the Humber Arm Allochthon, suggesting that the characteristic remanence predates mid-Ordovician (Taconic) transport (Beaubouef et al., 1988). However, rotation of slices relative to one another could have happened in the late Silurian to mid Devonian during orogenic reactivation (Cawood et al., 1988), or during the movement of much of western Newfoundland as part of a greater Port au Port Allochthon (Stockmal and Waldron, 1993).

#### 3.2 Intraformational conglomerate test

An intraformational conglomerate test (Graham, 1949) was performed using samples collected from clasts of blocky trachybasalt and rounded amygdaloidal basalt in a layered, reworked tuff (Plate 2) that overlies a trachybasalt flow (site 3). The sampling location lies stratigraphically "2m above the trachybasalt flow and "10m below the overlying 2m thick U-Pb dated ankaramite flow (site 2). Results for specimens from the 21 trachybasalt and 15 amygdaloidal basalt clasts are presented in Appendix A.

Trachybasalt clast specimens typically display two well resolved component magnetizations (Figure 3a-b). A soft component is removed by  $^{-}15$  mT (150 Oe) or  $300^{\circ}$ C. It is resolved in 13 clasts and has a consistent northwest and steep down in situ direction (D=310°, I=81°;  $\alpha_{95}$ =22.5°, k=4.3; N=13), which is close to the present Earth's field direction and is likely a recent VRM.

A hard component resolved in 20 clasts has coercivities mainly greater than 30 mT and unblocking temperatures greater than  $400^{\circ}$ C. This stable, hard component of magnetization has similar demagnetization behaviour to that observed in specimens drawn from the underlying site 3 trachybasalt, and shows a large scatter of directions among the 20 clasts (Figure 4a). A statistical test of randomness (Watson, 1956; Irving, 1964) shows that the 20 scattered hard component directions pass the intraformational conglomerate test (i.e. the specimens' unit vector sum R=5.38 is less than the  $R_0=7.17$  expected for 20 specimens at the 95% confidence level).

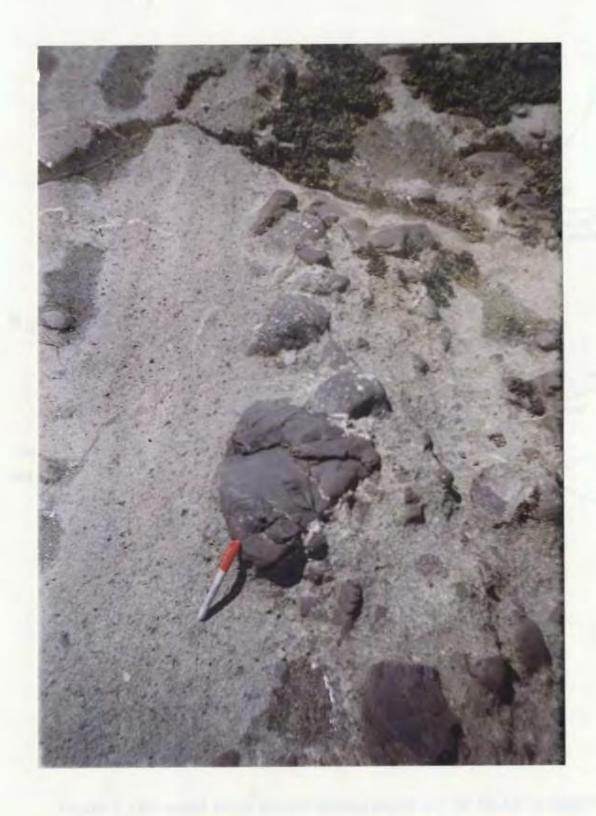


Plate 2. Blocky trachybasalt and rounded amygdaloidal (alkali) basalt clasts sampled from an intraformational tuff for the conglomerate test. Scale pen is 14 cm long.

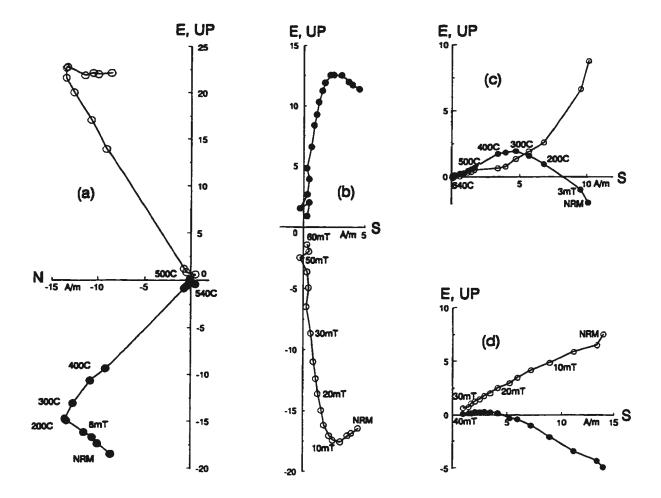


Figure 3. Orthogonal vector plots of thermal (a),(c) and AF (b),(d) demagnetization of representative samples from conglomerate test clasts: Trachybasalt clasts (a),(b); Amygdaloidal alkali basalt clasts (c),(d). Decay paths for each sample are projected in the UP-S (E-S) plane with closed (open) circles.

Amygdaloidal basalt clast specimens typically behave as shown in Figure 3c-d. A soft component is removed by demagnetization to  $^{-}25$  mT or  $^{-}400^{\circ}$ C. It is well resolved in all 15 clast specimens, and has a mean in situ direction (D=350°, I=83°;  $\alpha_{95}$ =4.8°, k=64.9; N=15) close to the present Earth's field direction and is likely a recent VRM.

A hard component of magnetization is also present in 11 of the 15 amygdaloidal clast specimens, but is more difficult to resolve, since it begins to be removed at ~15 mT or ~300°C while much of the dominant soft component is still present. The amygdaloidal basalt clast hard component directions scatter loosely (Figure 4b), but are not statistically random (unit vector sum R=9.33, greater than  $R_0$ =5.28 expected for 11 specimens at the 95% confidence level). The hard remanence appears to be mostly overprinted, with a tilt-corrected mean direction of D=145; I=5.7° ( $\alpha_{95}$ =20.0°, k=6.2; N=11).

Equal area stereoplots of hard component directions from trachybasalt and amygdaloidal basalt clasts are presented in Figure 4.

# 3.3 Primary remanence and evidence for an overprint

The positive conglomerate test (Figure 4a) proves that magnetite-borne remanence in trachybasalt with coercivities above 15 mT and unblocking temperatures above 300°C was acquired before the incorporation of the trachybasalt clasts into the intraformational tuff (Graham, 1949). Hence, the `A' component direction dates from the ca. 550 Ma age of the volcanics.

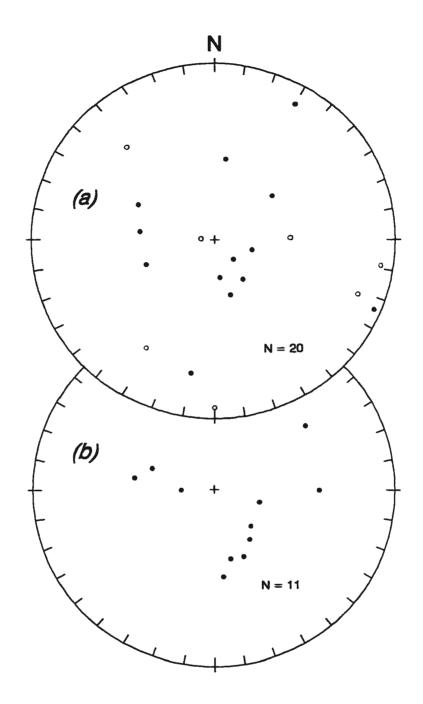


Figure 4. Equal area stereoplots showing the scatter of in-situ hard component directions for conglomerate tests based on (a) 20 trachybasalt clasts, and (b) 11 amygdaloidal basalt clasts. See text for details. Down (up) directions marked by closed (open) circles.

This is consistent with the zeolite facies metamorphism of the Skinner Cove volcanics which implies heating to less than 200°C (Liou et al., 1991; Beiersdorfer and Day, 1995). Even if applied for a million years, heating to 200°C should not have thermoviscously reset magnetite with unblocking temperatures above 300°C, according to single domain theory (Pulliah et al., 1975), whereas the `A' component mostly resides in magnetite with unblocking temperatures above 400°C. Any thermoviscous remagnetization with anomalously high unblocking temperatures (Middleton and Schmidt, 1982) should reside in soft multidomain magnetite (Dunlop et al., 1997) and should have been removed by the AF demagnetization to ~15 mT which preceded all thermal demagnetizations in this study (e.g Figure 3a,c).

The non-randomness of the amygdaloidal basalt clast hard component scatter (Figure 4b) is puzzling, in light of the positive conglomerate test using trachybasalt clasts with similar high coercivity and high unblocking temperature magnetite-borne remanence. The amygdaloidal basalt clasts appear to be overprinted by a high coercivity, high unblocking temperature remanence which cannot be a thermoviscous overprint for the reasons given above.

Amygdaloidal basalt clasts may carry a thermo-chemical overprint of high coercivity and high unblocking temperature, acquired through heating of the conglomerate during emplacement of the overlying flows. This best explains both the source of heating for the thermo-chemical process and the similarity of a partial overprint remanence

direction to the `A' remanence direction of the surrounding flows. Although this direction is also similar to the present Earth's field direction, there is no known Tertiary thermal event hot enough to cause the overprint. A Taconic or Siluro-Devonian thermal event is possible, but likely would not have magnetized the rocks in a steep down direction.

The mechanism for the acquisition of a thermo-chemical overprint is uncertain, but may involve the following process. Although basaltic rocks usually crystallize with titanomagnetite of high titanium content, the titanomagnetite in subaerial and intrusive basaltic rocks usually oxidizes during initial cooling to a fine intergrowth of ilmenite and magnetite with Curie point near 580°C (Ade-Hall et al., 1971). However, in submarine basalts the titanomagnetite often remains unexsolved with a Curie point near 150°C (Ade-Hall et al., 1976). Subsequent burial beneath a lava pile can cause zeolite facies metamorphism which often alters the titanomagnetite to a ~580°C Curie point magnetite containing fine rutile granules (Ade-Hall et al., 1971).

This seems to have occurred to the conglomerate test amygdaloidal basalt clasts, except that less oxygen was available to the cores of the titanomagnetite grains, which exsolved ilmenite instead, rutile being mostly restricted to the margins of the grains (e.g Plate 1). That is, the amygdaloidal basalt clasts seem to have been incorporated into the conglomerate with unexsolved titanomagnetite of too low a Curie point for stable remanence. During burial by contemporaneous overlying flows, zeolite facies metamorphism occurred, causing titanomagnetite to exsolve ilmenite (in grain cores) and

rutile (at grain margins and in cracks), raising the Curie point to 580°C and stably magnetizing the clasts in the same direction as the overlying flows. This may also have happened in the pillow basalt flow (site 4) which is the only `A' site sampled from an obviously submarine setting.

The likely contemporaneous origin of the overprint in amygdaloidal basalt clasts, and the absence of any overprint in the trachybasalt clasts indicates that the hard `A' component remanence recognized in flows and dykes of the Skinner Cove Formation is likely primary, acquired at ~550 Ma by thermoviscous and possibly in site 4, thermochemical mechanisms during the time of flow and conglomerate emplacement at ~550 Ma.

The hard `B' component remanence is found only in site 7 pillow basalt, the only site from the Wallace Brook member (Baker, 1979). It is similar to the `A' component in demagnetization characteristics, and may represent a reversal, although it is not strictly antiparallel to `A'. The hard `C' component remanence may be a Kiaman-type overprint acquired during post-folding orogenic activity, since it is found in samples drawn from the lowermost exposed units (sites 8, 15) in the structural slice and has an in situ south-southeast, shallow down direction.

Figure 5 shows a stereoplot of the 10 `A' sites and their mean. The tilt corrected southeast and down mean direction derived in Table 2 for the Skinner Cove Formation is  $D=144^{\circ}$ ,  $I=31.5^{\circ}$ , with  $\alpha_{95}=10.8^{\circ}$  and precision parameter k=21.1. This result yields a palaeolatitude of 17.1°S +7.4°/-6.3°. Calculation of a mean pole and  $A_{95}$  from `A' site

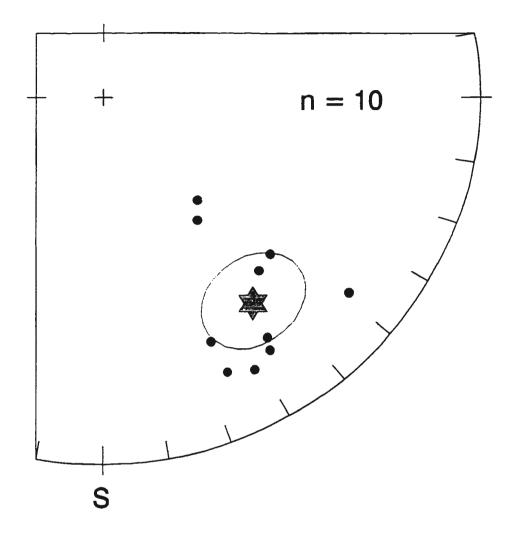


Figure 5. Equal area stereoplot of the ten tilt-corrected `A' component site mean directions (Table 2). The formation mean direction derived from them is  $D=144^{\circ}$ ,  $I=31.5^{\circ}$ ;  $\alpha_{95}=10.8^{\circ}$ , k=21.1. Down directions marked by closed circles.

virtual geomagnetic poles (VGPs) gives a palaeolatitude of  $18.6^{\circ}\text{S} \pm 9^{\circ}$ . The latter will be used below for comparison with palaeolatitudes calculated from other published palaeopoles.

#### **Chapter 4: Discussion**

#### 4.1 Relation to Laurentia

Although the Skinner Cove volcanics have been transported, their palaeolatitude should constrain Laurentia at ~550 Ma, since an original relation with Laurentia is implied by local structural associations as well as regional age and trace element geochemistry correlations with other Humber Zone units.

Within the Humber Arm Allochthon imbricate stack, units of the Skinner Cove Formation overlie Laurentian shelf slope sediments of the Humber Arm Supergroup, implying that the two were originally adjacent before their mid-Ordovician obduction. Within the Skinner Cove Formation, the lateral discontinuity of units, evidence for subaqueous eruption of some units and clastic indicators of locally steep palaeoslopes favour an oceanic volcanic setting, while the lack of continentally-derived sediments rules out a strictly continental rift setting. On the basis of these observations, Baker (1979) suggested that the Skinner Cove volcanics formed as an oceanic seamount near the margin of Laurentia.

Tectonic discrimination plots (e.g Meschede, 1986) using immobile elements Zr, Y, Ti, Nb indicate a within-plate setting for the Skinner Cove Formation alkali volcanism (Figure 6), either associated with continental rifting, or with a mantle plume. Titaniferous alkali basalts with similarly high Zr/Y, Nb/Y, and generally enriched LREE are found as

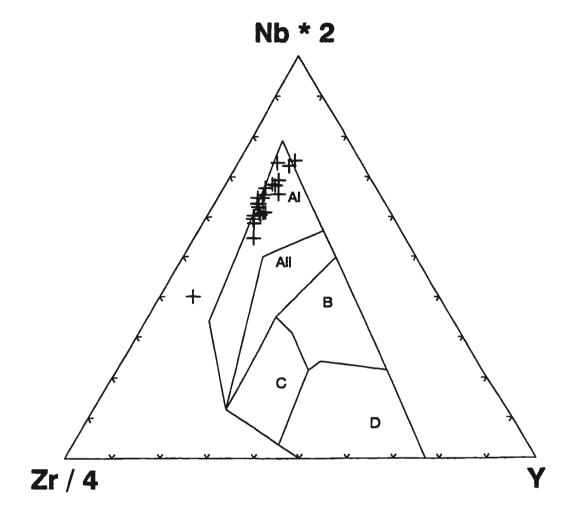


Figure 6. Tectonic discrimination plot (Meschede, 1986) using trace elements Zr, Y, and Nb concentrations. The 23 alkali basalt samples analysed by Baker (1979) from the Skinner Cove volcanics plot in the within-plate alkali field, reflecting their strongly alkali character. AI, AII fields - Within plate alkali; AII, C fields - Within plate tholeiite; B, D fields - Mid Ocean Ridge Basalts; C, D fields - Volcanic arc basalt.

allochthonous units in the Chaudiere River Nappe and Drummondville Olistostrome (Olive et al., 1997), as well as the Ste-Anne River Nappe (Camire et al., 1995), and are interpreted to be lateral equivalents of the Tibbit Hill metavolcanics (St-Julien and Hubert, 1975). These units are thought to have a Laurentia-related seamount origin similar to that of the Skinner Cove volcanics (see Fyffe and Swidden, 1991).

The Tibbit Hill metavolcanics have been dated at 554 +4/-2 Ma (U-Pb zircon. Kumarapeli et al., 1989), and have a confirmed continental setting in the Green Mountains of Vermont, where they rest on Grenville basement (St-Julien and Hubert, 1975). Similar aged magmatism is present in the Humber Zone of western Newfoundland, where the Lady Slipper Pluton occurs in association with allochthonous Grenvillian basement gneiss and unconformably overlying passive margin sediments. A tonalitic gneiss of the pluton was dated at 555 +3/-5 Ma (U-Pb zircon; Cawood et al., 1996), with a ~1500 Ma inherited component interpreted to come from the local Grenville basement of the Laurentian margin. The Lady Slipper Pluton likely represents the margin-intrusive equivalent of the ca. 550 Ma Skinner Cove Formation and other margin-edge Humber Zone alkali volcanics (Cawood et al., submitted).

Figure 7 shows the distribution of selected latest Neoproterozoic failed rift grabens and magmatic features of the northeast Appalachians. Similarity of age, trace element geochemistry and tectonic setting favours a common, regional origin for the Tibbit Hill, Quebec Humber Zone alkali volcanics, Lady Slipper Pluton and Skinner Cove volcanics.

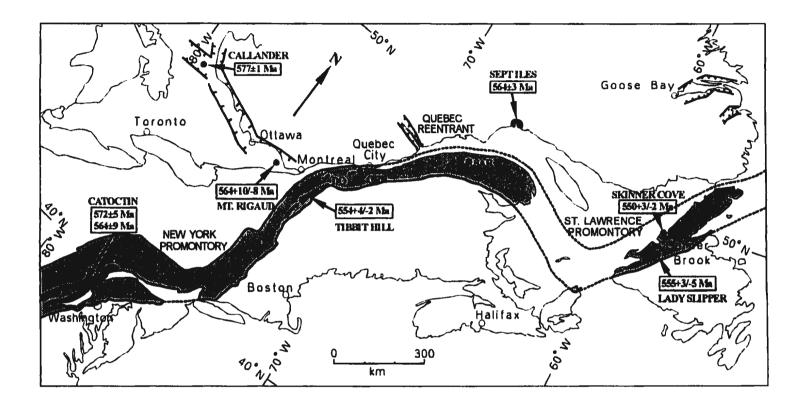


Figure 7. Distribution of selected rift-related and magmatic features along the incipient latest Neoproterozoic Iapetan margin of Laurentia. Deformed, variably transported units of the margin are marked by the Humber Zone (outlined in stipple). Units with ages are dated by the U-Pb zircon method (references in text). Failed rift graben (Kumarapeli, 1993; Murthy et al., 1992) are outlined within spiked line pairs. Abbreviations for Quebec Humber Zone alkali volcanics (Camire et al., 1995) are: CRN - Chaudierre River Nappe; DO - Drummondville Olistostrome; SAR - St. Anne River Nappe.

# 4.2 Late Neoproterozoic palaeomagnetism of Laurentia

The 18.6°S ±9° palaeolatitude derived from site VGPs for the Skinner Cove Formation constrains the Iapetus margin of Laurentia, implying that Laurentia occupied an equatorial position at ~550 Ma. Figure 8 presents the palaeolatitudinal drift history of the Newfoundland segment of the Laurentian margin, calculated for published Laurentian palaeopoles from 580 Ma to 510 Ma which have well-constrained magnetization ages (Table 3).

Recently tabulated Laurentian poles of ca. 550 Ma age (Meert et al., 1994; MacNiociall and Smethurst, 1994; Torsvik et al., 1996) typically have poor control on the age of magnetization. For example, the Buckingham volcanics of Quebec (Dankers and Lapointe, 1981) have yielded only an imprecise whole-rock K-Ar age of 573 ±32 Ma (Lafleur and Hogarth, 1981). The Long Range Dykes of Labrador have a K-Ar (biotite) date of 553 ±22 Ma (Wanless et al., 1970), which is interpreted as the age of a remagnetization event giving a low-inclination remanence direction (Meert et al., 1994). However, a baked contact test suggests the low-inclination remanence corresponds to the crystallization age of the dykes (Murthy et al., 1992) given by U-Pb zircon and baddelyite dates of 615 ±2 Ma (Kamo et al., 1989) and 614 +6/-4 Ma (Kamo and Gower, 1994). The Double Mer Formation red beds of Labrador (Murthy et al., 1992) have a low-inclination remanence like the Long Range Dykes, but poor age control.

The Buckingham volcanics, Long Range Dykes, and Double Mer Formation poles

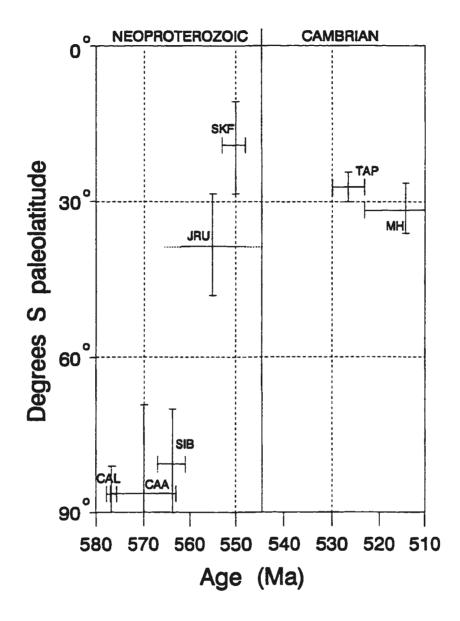


Figure 8. Palaeolatitude plot of the west Newfoundland segment of Laurentia's Iapetan margin calculated from late Neoproterozoic to Cambrian Laurentian palaeopoles (Table 3). Abbreviations are: CAA -Catoctin `A' component; CAL -Callander Complex; JRU -Johnnie Rainstorm Fm, Unrotated; MH -Moores Hollow; SIB -Sept Iles `B' component; SKF -Skinner Cove Formation; TAP -Tapeats Sandstone.

Table 3: Palaeolatitude of the west Newfoundland Iapetan margin between 580 Ma and 510 Ma calculated from published poles for Laurentia.\*

Unit	Age (Ma)	Palaeopole**	A <sub>95</sub>	K	Palaeolatitude
Moore Hollow Gp., TX	505-523 bio	1°S 163°E	5°	94	31° ± 5° S
Tapeats SS, TX	-525 bio	5°N 158°E	3°		27° ± 3° S
Skinner Cove Fm, Nfld	550 +3/-2 U-Pb	(15°N 157°E)*	9°	31	19° ± 9° S
Johnnie Rainstorm, NV	<sup>-</sup> 555 ?	10°S 162°E	-10°		38° ± 10°S
Sept Iles `B,' Quebec	564 ±3 U-Pb	44°S 135°E	10°	16	80° ± 10°S
Catoctin Basalts 'A,' VA	564 ±9 U-Pb	43°S 118°E	17°	17	86° ± 17°S
Callander Complex, ONT	577 ±1 U-Pb	46°S 121°E	6°	25	87° ± 6° S

<sup>\*</sup>Palaeolatitude calculated for present-day Skinner Cove location 49.5°N, 302°E (see text).

Ages obtained from biostratigraphic (bio) or radiometric (U-Pb) methods.

<sup>\*\*</sup>North palaeopole calculated as the mean of site VGPs (Virtual Geomagnetic Poles), with A<sub>95</sub> being the circle of 95% confidence about the mean pole direction, and K is the precision parameter.

Skinner Cove Fm pole is a proxy for Laurentia, but does not account for possible net tectonic rotation relative to the craton.

are excluded from Figure 8, since their uncertain age of magnetization makes them of only limited support for the discussion below. However, a regional (thermal?) remagnetization event at ~555 Ma most plausibly accounts for the similarity of low-inclination directions between these three studies, and may be related to the regional activity which produced the ca. 555-550 Ma Tibbit Hill, Skinner Cove, and Lady Slipper magnatism.

Sandstones of the dual-polarity Johnnie Formation (Rainstorm member) of Nevada are estimated to be ~10 Ma older than the Precambrian-Cambrian boundary (cf. Meert et al., 1994), giving an age of ~555 Ma using the timescale of Tucker and McKerrow (1995). The (unrotated) pole derived for the Johnnie Formation (van Alstine and Gillett, 1979) implies a low southerly palaeolatitudinal position for Laurentia at roughly 555 Ma (Figure 8), which supports the ~550 Ma Skinner Cove Formation result. An equatorial to low southerly palaeolatitudinal position for Laurentia is also supported by early to mid Cambrian poles (Table 3, and Elston and Bressler, 1977; Farr and Gose, 1991), implying that Laurentia remained at low palaeolatitudes from ~550 Ma onwards through the Cambrian.

The Callander Complex of Ontario is well-constrained in age (577  $\pm$  1, U-Pb zircon; Kamo et al., 1995) and carries a primary remanence, demonstrated by a positive baked contact test (Symons and Chiasson, 1991). Comparison of its well-constrained palaeolatitude estimate for the Laurentian margin (87° $\pm$ 6°S) with the 18.6° $\pm$ 9°S Skinner Cove Formation result for 550 Ma implies a northward latitudinal drift rate for Laurentia

of ~28 cm/yr (68°/27 Ma), with an uncertainty of ~± 10 cm/yr, if full advantage is taken of the 95% confidence ranges (Figure 8).

An even higher apparent drift rate is implied by palaeopoles for the Catoctin volcanics (Meert et al., 1994) and the Sept Iles anorthosite (Tanczyk et al., 1987). For the Catoctin basalts, U-Pb ages (572 ±5 Ma and 564 ±9 Ma; Aleinikoff et al., 1995) and a remanence that predates Taconic folding (Meert et al, 1994) imply that the Laurentian margin remained at high southerly palaeolatitudes of ~86°S as late as ~570 Ma. The Sept Iles anorthosite `B' component (Tanczyk et al., 1987) is less constrained in magnetization age, there being no proof of primary remanence. However, if the `B' pole is primary, as reinterpreted by Symons and Chiasson (1991), then Laurentia started its rapid northward drift by 564 ±3 Ma (U-Pb zircon, Higgins and van Breemen, in press).

Rapid northward apparent drift appears to have begun within ~7 Ma of 570 Ma, based on the results from the Callander Complex, the Catoctin volcanics and the Sept Iles Anorthosite. A latitudinal drift rate of ~34 ±15 cm/yr for Laurentia seems to be the most reasonable estimate which can be derived from existing late Neoproterozoic Laurentian palaeomagnetic data, calculated for ~68° of drift during the period between ~570 Ma and ~550 Ma. A rapid northward drift of Laurentia from high southerly palaeolatitudes to the equator between 580 Ma and 540 Ma has been proposed (Meert et al., 1993), with interpolated minimum (latitudinal) drift rates as high as 23 cm/yr (Gurnis and Torsvik, 1994). The Skinner Cove Formation result provides support for a high latitudinal drift rate

and constrains Laurentia to have reached an equatorial position by ~550 Ma.

Kirschvink and others (1997) recently presented evidence for a major true polar wander (TPW) event of some 90° between ~530 Ma and ~515 Ma to account for much of the inferred rapid apparent motions of Laurentia and an assembled Gondwana, as well as apparent rotations of Siberia and Australia. Results from the Skinner Cove volcanics do not support a mid-Cambrian major TPW event since this would require Laurentia to reside near the south pole until ~530 Ma instead of approaching the equator by ~550 Ma as implied primarily by this study and the Johnnie Rainstorm result. A TPW contribution to apparently rapid latitudinal movements of Laurentia (and Baltica; Gurnis and Torsvik, 1994) is possible (Evans, 1998), but difficult to evaluate since there is a general lack of late Neoproterozoic palaeomagnetic data from other cratons.

# 4.3 Implications for timing of Iapetus opening

Alkali magmatism of ca. 555-550 Ma age along the Laurentian margin, followed by transgressive sedimentation at the time of the Precambrian-Cambrian boundary (Bond et al., 1984; Williams and Hiscott, 1987; Thomas, 1991) are together interpreted to mark the final stage of rifting between Laurentia and the proto-Andean margin of Gondwana along Rio de la Plata-Amazonia, signalling the birth of the Iapetus Ocean at ~545 Ma (e.g. Dalziel, 1997). The Laurentia-Amazonia-Rio de la Plata association is attractive because it preserves the global budget of late Neoproterozoic rifted margins proposed by Bond and

others (1984). An ancestral association of Laurentia with these South American cratons is suggested by a geometrical fit of the reconstructed Labrador-Scotland promontory of Laurentia with the Arica embayment of South America (Dalziel, 1992), and supported by similarities in age of Grenvillian-aged basement (Dalziel et al., 1994; Wasteneys et al., 1995), and possibly by the similarity of the late Neoproterozoic Puncoviscana Formation of northwest Argentina with rift deposits along Laurentia's Iapetan margin (Dalziel et al., 1994).

However, the geological interpretation for a rifting relation between these cratons at the Precambrian-Cambrian boundary is not consistent with ~550 Ma palaeomagnetic data (e.g., Torsvik et al., 1996; this study) which imply a large separation of up to ~75° between Laurentia and Gondwana's proto-Andean margin at that time. Gondwanan ca. 550 Ma palaeopoles from the Mozambique belt (Congo), India and Australia (summarized in Meert and Van der Voo, 1997) would place Laurentia astride the south pole instead of near the equator, if a ca. 550 Ma rifting relation with the proto-Andean margin (Dalziel, 1997) is maintained.

The discussion to follow will explore possibilities for reconciling the late Neoproterozoic palaeomagnetism with the geology, with the aim of proposing a palaeogeographic model for the much-disputed period between ca. 580 Ma and ca. 540 Ma.

# 4.3.1 Palaeomagnetic constraints

While no palaeomagnetic data for Gondwanan cratons during the critical late Neoproterozoic period are available, several poles of 550 Ma age are published.

The position of Gondwana at 550 Ma may be constrained by the Sinyai Dolerite dike of Kenya, which intrudes gneisses of the Mozambique belt in Kenya as a solitary, 150 m wide dyke (Meert and Van der Voo, 1996). It has a remanence that exhibits dual polarities but is interpreted to be a remagnetization, likely acquired at the dike's  $^{40}$ Ar/ $^{39}$ Ar metamorphic biotite closure age of 547  $\pm 4$  Ma. No tilt correction was possible for the result, although local tectonic rotation seems unlikely (Meert and Van der Voo, 1996). The dual polarity of the dyke remanence is considered to indicate that secular variation was likely averaged out over the time of remanence acquisition during the metamorphic cooling of the dyke.

The Sinyai dyke pole is an uncertain constraint on the ~550 Ma position of the Congo craton of Gondwana because the dyke's age of remanence acquisition may not be the biotite closure age, the dyke's palaeomagnetic data may require tilt correction, and the dyke's relation to the Congo craton may have changed since the remanence was acquired. Nevertheless, the similarity of the Sinyai Dyke pole with other ca. 550 Ma Gondwana paleopoles from India (McElhinny et al., 1978) and Australia (summarized in Li and Powell, 1993) support the interpretation of Meert and Van der Voo (1996).

The ca. 550 Ma Gondwanan poles only represent the Rio de la Plata and Amazonia

cratons if no significant separations remained between constituent Gondwanan cratons at 550 Ma. Wide separations between Gondwanan cratons appear to be unlikely across basins that are interpreted to be narrow, intracratonic or closed by that time (Unrug, 1996; Trompette, 1997). Assuming an assembled West Gondwana and a Dalziel (1997) reconstruction, the proto-Andean margin of Gondwana and Laurentia would occupy a position at the Sinyai Dyke south pole, instead of the equatorial position implied by the Skinner Cove Formation paleolatitude. The ~550 Ma Gondwanan poles from India and Australia have poorly constrained age (±30 Ma and ±15 Ma, respectively), but still require the proto-Andean margin to reside at high southerly palaeolatitudes, some 60° from Laurentia's Iapetan margin as constrained by the ~550 Ma Skinner Cove result.

Other Gondwanan poles from the Cambrian imply the movement of Amazonia and West Africa cratons across the south pole during the Cambrian (Meert and Van der Voo, 1997), lending support to the polar position of the proto-Andean margin implied by the ca. 550 poles. If the proto-Andean margin and cratons of a nearly assembled Gondwana had travelled rapidly north with Laurentia during the late Neoproterozoic to rift from the its Iapetan margin at low southerly palaeolatitudes at ~550 Ma, they must then have drifted rapidly south to occupy the south polar position implied by ca. 530-510 Ma poles from Gondwana. A continued south polar position for the proto-Andean margin throughout the late Neoproterozoic into the Cambrian, as implied by the poorly constrained ~550 Ma Gondwanan poles, is the most plausible alternative. For the remainder of this discussion

the ca. 550 Ma Gondwanan palaeopoles are assumed to be approximately correct in age, representing an assembled or nearly assembled Gondwana supercontinent.

The Laurentian poles have been discussed above, but a few remarks on the basis of their reliability are warranted: The Callander Complex (Symons and Chiasson, 1991) provides a well determined near south polar position for Laurentia at ~577 Ma, along with an adjacent proto-Andean margin of Gondwana, if the Laurentia-Amazonia-Rio de la Plata association and post 570 Ma timing of rifting is correct. The Callander Complex result is broadly supported by similar, but less well constrained high palaeolatitude results from the Catoctin basalts (Meert et al., 1994) and the Sept Iles Anorthosite (Tanczyk et al., 1987).

This study provides results from the ~550 Ma Skinner Cove volcanics, which are not part of the Laurentian craton. If their above argued original relation with the Laurentian margin is correct, then the Skinner Cove volcanics constrain the Iapetan margin of Laurentia to low southerly palaeolatitudes at ~550 Ma. Sandstones of the ~555 Ma Johnnie Formation, Rainstorm member in Nevada also provide a low southerly palaeolatitude position for Laurentia (Figure 8), and are part of the craton, but may have been subject to tectonic rotation (van Alstine and Gillett, 1979). However, like the Skinner Cove volcanics result, a possible tectonic rotation of the Johnnie Rainstorm pole would not alter the latitudinal separation between Laurentia and its palaeopole, only Laurentia's orientation at low latitude would vary. In other words, net tectonic rotation about a vertical axis of the locally tilt-corrected palaeomagnetically sampled units does not alter the unit's

distance to its palaeopole. Hence, no net rotation of the Skinner Cove volcanics or Johnnie Rainstorm units would allow Laurentia to be closer to the south pole and the proto-Andean margin of Gondwana at ~550 Ma.

Other ca. 550 Ma cratonic poles for Laurentia (e.g. tabulated in Torsvik et al., 1996) are similar to the Johnnie Rainstorm result, but have ages of magnetization that are less well constrained or tested.

If an ancestral relation between Laurentia and the proto-Andean margin of Gondwana (Bond et al., 1984; Dalziel, 1997) is correct, then the most plausible interpretation of the palaeomagnetic data from Laurentia between 580 Ma and 550 Ma (Figure 8) and ca. 550 Ma Gondwana is that the apparent rapid northward movement of Laurentia away from a south polar proto-Andean margin of Gondwana represents the opening of the Iapetus Ocean between 570 Ma and 550 Ma.

# 4.3.2 Geological constraints

Evidence for rifting along the Appalachian margin of Laurentia prior to the opening of the Iapetus extends back to the mid-Neoproterozoic, involving the emplacement of ca. 750 Ma granitoids, rhyolites and tholeiitic continental flood basalts in units such as the Mt. Rogers and Grandfather Mountain Formations of the southern Appalachians (Aleinikoff et al., 1995). This early rifting activity is of the same age as rifting along Laurentia's proto-Pacific margin (Moores, 1991; Hoffman, 1991; Dalziel, 1991, 1997), but apparently

did not proceed to completion, as there is little evidence of ca. 750 Ma plutonic or rifting activity in the northeast Appalachians (Kumarapeli, 1993; Aleinikoff et al., 1995).

Initiation of the continental extension which led to the opening of the Iapetus is first dated by the ~615 Ma Long Range Dykes and ~590 Ma Grenville Dyke swarm (Kumarapeli, 1993). Much of the development of the Ottawa-Bonnechere rift graben and related alkaline intrusions is interpreted to have occurred between ~590 Ma and the ~570 Ma ages of most of the alkaline intrusions (Figure 7), such as the ~577 Ma Callander Complex and the ~564 Ma Sept Iles Anorthosite (Kumarapeli, 1993; Higgins and van Breemen, in press).

Alkali volcanic and plutonic units (e.g., the ~554 Ma Tibbit Hill metavolcanics and ~555 Ma Lady Slipper Pluton) have been interpreted to represent the last stage of rifting prior to initial sea-floor spreading of the Iapetus (Kumarapeli, 1993; Cawood et al., 1996). This is at variance with the palaeomagnetic evidence which suggests that sea-floor spreading began at ~570 Ma. Transgressive sedimentation of latest Neoproterozoic-early Cambrian age is found in passive margin sections along the Appalachians (Williams and Hiscott, 1987; Simpson and Sundberg, 1987; St-Julien and Hubert, 1975; Cawood et al., 1996), and has been interpreted to represent post-rift margin thermal subsidence that marks a transition from rift to drift. This implies that final separation of Laurentia from its conjugate margin occurred near the time of the Precambrian-Cambrian boundary (Williams and Hiscott, 1987; Thomas, 1991), which is also at variance with palaeomagnetic evidence

suggesting this final separation occurred at 570 Ma.

Cambro-Ordovician passive margin strata from Newfoundland and Virginia have also been used in subsidence curve analysis, or 'back-stripping,' in which lithification and loading due to overlying sediments is calculated and removed from the section to arrive at an estimate of the thickness of sediment cover, and therefore the subsidence of the margin by comparison with model thermal subsidence curves (McKenzie, 1978). Subsidence curve analysis of Laurentia's Iapetan margin by best visual fit of the calculated curves with modelled subsidence yields an estimated initiation of thermal subsidence at the time of Precambrian-Cambrian boundary (Bond et al., 1984). These analyses are now revised on the basis of biostratigraphic dating of units in the new Cambrian timescale (e.g., Tucker and McKerrow, 1995) to give an age of 550 Ma for the initiation of thermal subsidence, with an age of at most 600 Ma possible, assuming maximum delithification factors in the restored section calculation (Bond, 1997).

Units of the proposed conjugate margin to Laurentia in South America include upper Precambrian to lower Cambrian alkali volcanics of the Puncoviscana Formation in northwest Argentina (Dalla Salda et al., 1992), related granitoids with tholeitic affinities (Rapela et al., 1990), and a transgressive section (Acenolaza and Durand, 1986). To the north, bordering the southern margin of the Amazonia craton are late Neoproterozoic to early Cambrian sections of the Paraguay and Tucavaca Belts, in which Vendian glaciogenic and turbiditic rocks are overlain by limestones which contain Ediacaran-like

fauna indicative of a late Vendian (570-545 Ma) age. The upper part of the Paraguay section consists of poorly sorted, cross-bedded sandstones overlain by red shales, siltstone and arkoses (Pimentel et al., 1996). Subsidence analysis of a section from northwest Argentina (Bond et al., 1984) yields a curve similar to those of the Appalachian margin of Laurentia, implying the onset of thermal subsidence was at the Precambrian-Cambrian boundary.

Information from the proto-Andean margin tends as yet to be less well constrained in age, making comparisons with its proposed conjugate Laurentian margin unclear. Another complication stems from the long-standing convergent aspect of the Andean margin, in which continental subduction arc plutonism, metamorphism, terrane accretion and multiple deformation events act to make analysis of late Neoproterozoic to early Cambrian units more difficult (Dalla Salda et al., 1992).

The simplest interpretation of geological evidence from Laurentia and the proto-Andean margin of Amazonia and Rio de la Plata is that rifting occurred between them at the Precambrian-Cambrian boundary, with subsequent early Cambrian transgressive sedimentation due to thermal subsidence of the rifted margins (e.g Dalziel, 1997). The following section discusses an alternative interpretation of the geologic data that is consistent with the palaeomagnetically inferred 570 Ma birth of the lapetus.

#### 4.3.3 Is a ca. 570 Ma birth of Japetus compatible with the geology?

The timing of Laurentian magmatic and structural events, interpreted to culminate in rifting at ~550-545 Ma (Kumarapeli, 1993; Dalziel, 1997; Cawood et al., submitted), is also consistent with rifting at ~570 Ma. Large volume Catoctin tholeiitic flood basalt and rhyolitic volcanism at ~570 Ma (Burton et al., 1995) may mark the final breakup of Laurentia from its conjugate margin, while ca. 555-550 alkali magmatism of the Laurentian margin can be interpreted as post-rifting activity, occurring as seamounts and intrusions in a manner analogous to Atlantic passive-margin alkali magmatism during the early Cretaceous (Jansa and Pe-Piper, 1985; Oyarzun et al., 1997).

Intersections of major Atlantic oceanic transforms with the North American margin seem to have controlled the location of passive margin alkali seamounts and volcanics (Jansa and Pe-Piper, 1985). A similar controlling mechanism has been suggested for the formation of Humber Zone alkali volcanics in Quebec (Kumarapeli et al., 1988), and could also account for the Skinner Cove volcanics and the margin-intrusive Lady Slipper Pluton. A relation between the promontories and embayments of margins with early transform development is recognized for the modern-day Atlantic, and for the formation of Iapetan transforms with respect to the sinuous Laurentian margin (Stockmal et al., 1987). Opening of the Iapetus at ~570 Ma in Quebec and west Newfoundland may have involved transform development in connection with both the Ottawa-Bonnechere failed rift arm (Kumarapeli, 1993) and with the abrupt bend in the margin at the tip of the St.

Lawrence promontory (Stockmal et al., 1987), thus controlling the later occurrence of alkali magmatism along the Quebec reentrant and St. Lawrence promontory (Figure 7).

Stratigraphic evidence for widespread transgression of the Laurentian margin at 540 Ma (Thomas, 1991; Cawood et al., 1996) that is interpreted to represent margin subsidence recording a rift-drift transition may have a viable alternative interpretation as well. The first drift sedimentation is recognized at the base of early Cambrian transgressive sections which overlap sediment-filled rift grabens and rift volcanics (Thomas, 1991; Cawood et al., submitted). The nature of the contact between the onlapping transgressive sediments (e.g., Chilhowee Formation, Bradore Formation) and underlying strata is generally uncertain (Thomas, 1991; Simpson and Sundberg, 1987), and in several locations appears to represent a hiatus in deposition (e.g. Cawood et al., submitted), or an erosional surface (e.g. Burton et al, 1995). Transgressive drift sedimentation after a time break is consistent with a post-breakup unconformity and margin subsidence following a rift-drift transition at 540 Ma, but is also consistent with a longer hiatus in sedimentation following rifting and breakup at 570 Ma. Early Cambrian transgressive sedimentation may not necessarily reflect the rift-drift transition of the Laurentian margin if anomalous uplift of the margin occurred during the birth of the Iapetus.

Analyses of tectonic subsidence curves from Cambrian to Devonian passive margin sediments indicate that the initiation of Laurentian margin subsidence (the start of Iapetus opening) occurred at ~525 Ma (Bond, 1997). The analyses are based on comparison with

kinematic models (McKenzie, 1978; Jarvis and McKenzie, 1980) of thermally-controlled margin subsidence following various degrees of pure shear (uniform) lithospheric extension and thinning during rifting. Uniform stretching models have been successfully compared with observed degrees of extension and sedimentation in modern intracratonic basins and continental margins (e.g Barton and Wood, 1984; Roydon and Keen, 1981). However, margin subsidence modelling that involved significant melt generation during rifting (Bown, 1994; Buck, 1986; Keen, 1986) suggests alternative margin subsidence curves. Indeed, deep borehole data from present-day continental margins indicate that large deviations from post-rift kinematically modelled subsidence can occur, producing a relative uplift of several hundred metres, and delaying first sedimentation by ~10-30 m.y. (e.g Heller et al., 1982).

Anomalous margin subsidence appears to occur in connection with volcanic-type margins (Eldholm et al., 1995), in which the syn-rift and post-rift development of the margin is substantially modified by large-scale magmatic activity. White and McKenzie (1989) attribute the magmatism of volcanic margins to anomalously high upper mantle temperature due to the impact of a mantle plume, leading to much greater melt generation during decompression melting of the asthenospheric mantle underlying the continental rift. Modelling which involves rift-initiated asthenospheric circulation during lithospheric extension (Keen and Boutilier, 1995) also provides a mechanism for producing large volumes of decompression melting and anomalous margin subsidence, without requiring

elevated upper mantle temperatures or the involvement of a mantle plume.

In the uniform stretching models of Bown and White (1995), the effect of syn-rift melt production on margin subsidence is related to initially elevated asthenospheric mantle temperatures (modelled for 100°C and 200°C in excess of the upper mantle nominal 1300°C temperature) brought about by mantle plume involvement in rifting. In the cases of enhanced asthenospheric melt production, the production of a more buoyant depleted mantle and the magmatic addition (underplating) of heated mafic material to lower extended crust results in buoyant support of the rifted margin, slowing, and in some cases reversing the extensional subsidence of the attenuated crust during final stages of rifting (Bown and White, 1995). Post-rifting margin thermal subsidence curves for all elevated asthenospheric mantle temperature cases mimic the form of the nominal 1300°C curves used in subsidence analysis, but are displaced upwards by up to several kilometres, reflecting the slowing or negation of major syn-rift extensional subsidence due to the addition of buoyant crustal material and support from the underlying depleted asthenospheric mantle.

For a subsiding margin this could mean a delay in the onset of transgressive sedimentation compared with that implied by curves for a `normal' rifted margin. In other words, a freshly rifted volcanic margin may ride several hundred meters to several kilometres higher at the rift-drift transition than would a normal rifted margin, such that subsidence-related transgressive sedimentation atop continental rift grabens and volcanics

would be delayed until the volcanic margin had subsided to the eustatic sea level over some tens of millions of years.

Local small-scale circulation of the lithospheric mantle and the asthenosphere below developing rifts may similarly account for localized decompression melting of asthenospheric mantle, and the development of a volcanic margin and anomalous margin subsidence (Keen and Boutilier, 1995). In these models, vigourous rift-initiated circulation appears to require steep lateral thermal gradients in the lithospheric mantle, best developed across a narrow rift (less than 200 km wide), with a narrow transition from unextended to extended continental crust, and with mantle material of comparatively low-viscosity. Continued local mantle circulation under the rifted margin following breakup may continue to provide heat to the margin, resulting in its delayed post-rift subsidence. While continent-ocean lithosphere transitions may not provide sufficient conditions for a continued local mantle convection following final rifting (Keen and Boutilier, 1995), the modelled convection-related delay in post rift subsidence may apply to failed rift arms of the Iapetus. Transgressive sections in Vermont, Quebec, west Newfoundland and northwest Argentina may have been influenced by anomalously delayed subsidence in relation to failed rift arms (Figure 7 and Dalziel, 1994), if conditions for vigourous riftinitiated local mantle circulation prevailed.

The inferred maximum possible age of breakup for Iapetan transgressive sections from Laurentia and Rio de la Plata would be ~570 Ma if syn-rift uplift of the margin

displaced first drift sedimentation by 20-30 m.y. Rifted margin buoyancy related to syn-rift melt emplacement would likely involve a ~200-600 m reduction in extensional syn-rift subsidence in order to account for a 20-30 m.y. delay in first transgressive sedimentation, based on melt-modified margin subsidence models (Bown and White, 1995; Keen and Boutilier, 1995), and observations of perturbations in margin subsidence history from present day volcanic margins (e.g. Heller et al., 1982).

A delay in the recording of drift transgressive sedimentation on a volcanic margin would result in a flatter subsidence curve, best fitted to the latter portion of model subsidence curves since the sedimentation would be initiated after much of the uplifted margin's exponentially decaying thermal subsidence had taken place. Tectonic subsidence curves for the Iapetus margin of Laurentia between New York and Greenland are recognized to be surprisingly flat (Bond, 1997), perhaps indicating a delay in the recording of drift sedimentation.

While a rift-drift transition at ~540 Ma is the simplest interpretation of geological data from Laurentia, an alternative interpretation involving initial Iapetan opening at ~570 Ma is also feasible, if the development of a volcanic-type margin (Eldholm et al., 1995) and its likely anomalous subsidence is invoked to account for a ~20-30 m.y. delay in first drift sedimentation. Did rifting to form the Iapetus involve the development of conjugate volcanic-type margins with anomalous margin subsidence? How might this be recognized in the preserved rock record?

Present-day volcanic margins are identified by a number of features related to their extensive magmatism, including 1) onshore rift-setting continental flood basalts; 2) voluminous extrusive basaltic complexes erupted in shallow water or subaerially atop crust of the continent-ocean transition, with intrusive counterparts; 3) sills and low-angle dykes in pre-opening sediments cratonward of the continent-ocean transitional crust; 4) volcanic vents and a regional tephra horizon in coeval strata; 5) thicker than normal oceanic crust adjacent to the continent-ocean transition, and; 6) a lower crustal body of mafic material which underplates the attenuated continental-oceanic transitional crust (Eldholm et al., 1995).

A good deal of the evidence for present-day volcanic margins is found with lithosphere of the continent-ocean transition. What happened to past continent-ocean transitions during collision and orogeny? Is any of it preserved, or accessible? The obduction onto the Laurentian margin of Taconic allochthons and the initiation of subduction along the proto-Andean margin implies that Iapetan continent-ocean transitional lithosphere may have been overridden, to become lost as deep roots in the Appalachian and Andean orogens.

More likely to be preserved are the peripheral products of a volcanic margin, such as continental flood basalts, a regional tephra horizon and possibly sills in pre-opening sediments later preserved in allochthons. Continental flood basalts related to the Iapetus opening are found along the Laurentian margin as the Catoctin volcanics of the Blue Ridge

mountains and the Lighthouse Cove Formation of west Newfoundland and southeast Labrador. However, the presence of flood basalts is not itself diagnostic of a volcanic margin.

If a volcanic margin developed in response to the arrival of a mantle plume (White and McKenzie, 1989; Bown and White, 1995), then evidence for the late Neoproterozoic arrival of a mantle plume in the Quebec reentrant portion of the rifting Laurentian margin (Kumarapeli, 1993; Higgins and van Breemen, in press), may be important. Both discussions propose regional (~1000 km) domal uplift of the Laurentian margin in response to the impact of a mantle plume, similar to the plume-related dynamic (thermal) uplift component in the models of Bown (1994) and Bown and White (1995). The direct effects of a plume head impact may extend over no more than an area of 2000 km diameter about it (White and McKenzie, 1989). However, plume-influenced thermal and magmatic uplift along the greater than 3500 km length of Laurentia's incipient Iapetan margin may have occurred if a mantle plume arrived under or near a region of previously thinned continental lithosphere with already heightened upper mantle temperature or fluid content (e.g. Thompson and Gibson, 1991; Eldholm et al., 1995). The magmatic and thermal effects on the lithosphere may have extended beyond the region affected by the plume head directly if plume material migrated along a sub-lithospheric channel under the rifting margin (e.g White, 1992; Oyarzun et al., 1997), perhaps influencing the timing and volume of the Catoctin volcanism.

In summary, the start of Iapetus opening at ~570 Ma is implied by palaeomagnetic data, and is permissible within the constraints of geologic data, if the following conditions are invoked: 1) passive margin alkali magmatism to account for ca. 555-550 Ma units of the northeastern Appalachians; and 2) a ~20-30 m.y. delay of the first drift transgressive sedimentation to early Cambrian, due to anomalous margin subsidence. Initial sea-floor spreading of the Iapetus Ocean may have predated ca. 555-550 Ma alkali magmatism by 15-20 million years, and the first Laurentian margin transgressive sedimentation by as much as 30 million years.

Definitive tests to prove or disprove this alternate geological interpretation of ~570 Ma final rifting to form the Iapetus are possible but difficult to find. The identification of continental flood basalts and tephra horizons in coeval strata in cratonic Laurentia and possibly Amazonia and Rio de la Plata would support the possibility of Iapetan volcanic-type margins, and anomalous margin subsidence leading to delayed transgressive sedimentation. On the other hand, the finding of conformable contacts between syn-rift and drift sedimentation would be strong evidence against final rifting at ~570 Ma, as it would imply that there was no break in time in latest Neoproterozoic to early Cambrian sedimentation which records final rifting and the first drift-phase margin subsidence.

#### 4.4 Late Neoproterozoic palaeogeography

Palaeogeographic reconstructions for ~575 Ma and for ~550 Ma which seek to reconcile latest Neoproterozoic palaeomagnetic and geologic data are presented in Figure 9. These reconstructions are consistent with geology for the time (Dalziel, 1997; Trompette, 1997; Unrug, 1996), with reinterpretation for Laurentia and Rio de la Plata as discussed in section 4.3, and are consistent with the palaeomagnetic data available from constituent cratons at the time (Meert and Van der Voo, 1997; Torsvik et al., 1996).

The conjugate margin which rifted from Laurentia at ~570 Ma giving birth to the Iapetus Ocean may have been the Amazonia and Rio de la Plata cratons of West Gondwana, as argued by Dalziel (1992, 1997). Early rifting between Laurentia and Amazonia-Rio de la Plata is shown for the ~575 Ma reconstruction (Figure 9a), marked by syenite and carbonatite rift-related magmatism (e.g. Callander Complex) along the Ottawa-Bonnechere failed rift arm (Kumarapeli, 1993) and volcanism along Laurentia's incipient Iapetan margin (e.g. Catoctin volcanics at ~570 Ma; Burton et al., 1995). An association between Amazonia and Congo-Sao Francisco cratons across the Goias Massif reflects their collision between ~630 Ma and ~600 Ma (Pimentel et al., 1997; Trompette, 1997). By 575 Ma, rocks of the Goias Massif were undergoing extensional uplift (Pimentel et al., 1996), as part of overall extension and dispersal amongst West Gondwana, Laurentia, Baltica and Siberia (e.g. Trompette, 1997; Gurnis and Torsvik, 1994; Torsvik et al., 1996). Other relations between cratons of Gondwana follow Dalziel (1997),

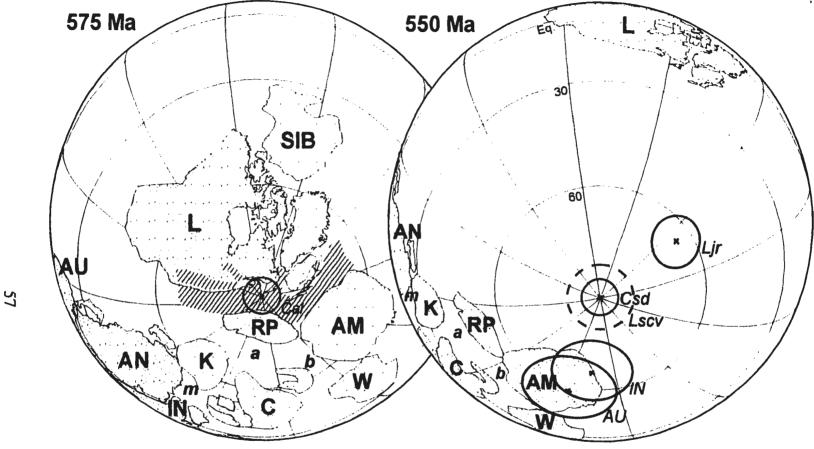


Figure 9. Late Neoproterozoic paleogeography for ~575 Ma and ~550 Ma, based on Dalziel, (1997). Cross-hatched zone in ~575 Ma diagram represents incipient rifting to form the lapetus, which had opened by the ~550 Ma diagram. Abbreviations: Cal- Callander Complex, Laurentia; Csd-Sinyai Dike, Congo; Ljr-Johnnie Rainstorm, Laurentia, Lscv-Skinner Cove volcanics, Laurentia; a-Adamastor Ocean; b-Brazilide Ocean/Orogen; m-Mozambique Ocean/Orogen; AM-Amazonia; AN-Antarctica; AU-Australia (and pole); C-Congo-Sao Francisco; IN-India (and pole); K-Kalahari; L-Laurentia; RP-Rio de la Plata; SIB-Siberia; W-West Africa. Baltica is omitted for clarity. Poles are plotted with circles of 95% confidence. Diagram created with the assistance of PLATES software from the University of Texas Institute for Geophysics.

although there are many alternative interpretations (e.g Grunow et al., 1996; Unrug, 1996; Meert and Van der Voo, 1997).

By the end of the Neoproterozoic (~550 Ma), the Iapetus Ocean had opened between Laurentia, West Gondwana, and Baltica, as shown in Figure 9b, which resembles the ca. 550 Ma reconstruction of Torsvik et al. (1996). Siberia is shown abutting Laurentia (Pelachaty, 1996), but it may have rifted away by 550 Ma (Torsvik et al., 1996). Laurentian margin ca. 555-550 Ma alkalic magmatism (Tibbit Hill, Lady Slipper Pluton, Skinner Cove Volcanics and others) would in this view have postdated rifting, perhaps erupting from remaining mantle plume material in response to a major rearrangement of plate boundaries and motions (e.g., Jansa and Pe-Piper, 1985), marked by the cessation of Laurentia's rapid northward drift (Figure 8); Laurentia may have stalled at the equator in a geoid low over a mantle sink (Gurnis and Torsvik, 1994). Gondwana is shown to be consolidated, although final closure of the Adamastor Ocean may have been at ~540 Ma (Hoffman, 1997), and final consolidation of Gondwana by ~530 Ma (Meert and Van der Voo, 1997).

Cambrian movement of Gondwana's Amazonia and West Africa cratons across the south pole (Meert et al., 1996; Dalziel, 1997) reflects the beginning of Iapetus closure and the initiation of subduction along the Gondwanan palaeo-Pacific margins of Antarctica and Rio de la Plata cratons (Grunow et al., 1996) and the Avalonian-Cadomian arcs (e.g Dalziel, 1997, Figure 14).

These reconstructions allow for the possible fleeting existence of a Pannotia supercontinent between the unifying <sup>-</sup>630 Ma Himalayan-style collision of Amazonia with Congo-Sao Francisco cratons (Pimentel et al., 1996; 1997) and the rifting of Baltica and Laurentia-Siberia from the consolidating Gondwanan cratons between <sup>-</sup>600 Ma and <sup>-</sup>565 Ma (Torsvik et al., 1996). The existence of Pannotia also depends on the timing of Gondwana assembly, which is variously estimated to have taken place between <sup>-</sup>700 and <sup>-</sup>600 Ma (Stern, 1994) or by <sup>-</sup>530 Ma at latest (Meert and Van der Voo, 1997). However, the existence of Laurentia united with Gondwana in the Pannotia supercontinent is not palaeomagnetically supportable by ca. 550 Ma.

Pannotia may best be viewed as a loose, transitional assembly of cratons at the end of the Neoproterozoic, during a period of apparently intense global reorganization of plate boundaries and sometimes rapid cratonic movement. The dispersal of Pannotia resulted in the consolidation of Gondwana and its separation from Laurentia, Siberia and Baltica by the Iapetus Ocean. These cratons ultimately assembled through closure of the Iapetus to form Pangea.

## Chapter 5: Concluding remarks

Alkali volcanic flows and dykes of the ca. 550 Ma Skinner Cove Formation in western Newfoundland retain a characteristic `A' remanence in ten sites which is interpreted to be primary on the basis of a positive intraformational conglomerate test. The palaeolatitude calculated from the ten tilt-corrected `A' site virtual geomagnetic poles is  $18.6^{\circ}\text{S} \pm 9^{\circ}$ , and is interpreted to represent the Iapetan margin of Laurentia at  $^{-}550$  Ma, based on the age of the Skinner Cove Formation and geological evidence for its original relation with Laurentia.

The low southerly palaeolatitude of the Skinner Cove Formation constrains Laurentia to have occupied an equatorial position by ~550 Ma. Comparison with other palaeomagnetic results from Laurentia suggests it drifted rapidly northward from near south polar palaeolatitudes at ~575 Ma (Figure 8). The rapid northward drift of Laurentia may accommodate the opening of a wide Iapetus by ~550 Ma, following initial spreading some 20 million years beforehand (Figure 9a,b). Subsidence of the Laurentian margin recorded in early Cambrian transgressive sections may not necessarily record its rift to drift transition, if anomalous margin subsidence due to large-scale syn-rift magmatic activity is invoked.

Of abiding interest are questions involving the apparent rapid movement of continents during the late Precambrian and Cambrian. Rapid northward movement of

Laurentia and Baltica during the late Neoproterozoic, followed by the movement of West Gondwana across the south pole in the early-mid Cambrian (Meert et al., 1996) suggests differing periods of apparently rapid cratonic movement. While rapid cratonic motion of  $^{34}$   $\pm 15$  cm/yr is implied by existing late Neoproterozoic palaeomagnetic data for Laurentia, the reconstructions proposed here do not require a role for true polar wander, although late Neoproterozoic TPW cannot be ruled out. Mechanisms to account for the driving forces of rapidly moving continents are much debated, and may act in concert in some cases. In the case of late Neoproterozoic Laurentia, several mechanisms for movement have been proposed, including slab pull during distant subduction of the proto-Pacific plate attached to Laurentia (Grunow et al., 1996; Dalziel, 1997), Iapetan spreading ridge push (Jurdy et al., 1995), or mantle push off of a thermal high under the late Neoproterozoic supercontinent, perhaps involving gravity as a motivator from a geoid high at the thermal anomaly to a geoid low over a mantle sink (Gurnis and Torsvik, 1994).

If the Iapetus Ocean began to open at ~570 Ma, and rapidly attained a ~7500 km width by ~550 Ma, as implied by palaeomagnetic data, then what are the consequences of such rapid seafloor spreading and the production of so much young, buoyant ocean crust? Eustatic sea level rise during the late Neoproterozoic and into the Cambrian may be due to Iapetan ridge-volume displacement and the replacement of old ocean crust at convergent margins with new more buoyant Iapetan crust (Thomas and Whiting, 1995).

Final rifting between Laurentia and an adjacent craton to form the Iapetus opened

an ocean which provided a new, subtropical east-west seaway and new flooded margins by the Precambrian-Cambrian boundary. The ca. 549-543 Ma diversification of Ediacaran life (Grotzinger et al., 1995) may have been aided by a new, more vigorous subtropical circulation and eustatic sea level rise (Valentine and Moores, 1970) amongst more dispersed cratons in a radically altered palaeogeography.

The results reported here encourage further precisely dated and tested palaeomagnetic investigation of units from Laurentia, Amazonia, Rio de la Plata and other cratons to resolve their role in the formation of the Iapetus and to evaluate palaeogeographic reconstructions such as that proposed here. For the late Neoproterozoicearly Cambrian period of apparently rapid cratonic movement and changing plate boundaries, a finer resolution of magnetization and geological events to within  $\pm 1\%$  of age ( $\pm 5$  Ma) may be required to clearly establish relations between the cratons involved in the possible existence of Pannotia, its dispersal, and the assembly of Gondwana.

## REFERENCES

Acenolaza, F.G., and Durand, F.R. 1986. Upper Precambrian-Lower Cambrian biota from the northwest of Argentina. Geological Magazine, 124: pp 367-375.

Ade-Hall, J.M., Palmer, H.C., and Hubbard, T.P. 1971. The magnetic and petrological response of basalts to regional hydrothermal alteration. Geophysical Journal of the Royal Astronomical Society, 24: pp 137-174.

Ade-Hall, J.M., Fink, L.K., and Johnson, H.P. 1976. Petrography of opaque minerals, Leg 34, *in* Initial reports of the Deep Sea Drilling Project, Volume XXXIV, Washington (US Government Printing Office): pp 349-364.

Aleinikoff, J.N., Zartman, R.E., Walter, M., Rankin, D.W., Lyttle, P.T., and Burton, W.C. 1995. U-Pb ages of metarhyolites of the Catoctin and Mount Rogers Formations, Central and southern Appalachians: Evidence for two pulses of Iapetan rifting. American Jounal of Science, 295: pp 428-454.

Baker, D.F. 1979. Geology and geochemistry of an alkali volcanic suite (Skinner Cove Formation) in the Humber Arm Allochthon, Newfoundland. Unpublished M.Sc. dissertation, Memorial University of Newfoundland. 314p.

Barton, P., and Wood, R. 1984. Tectonic evolution of the North Sea basin: crustal stretching and subsidence. Geophysical Journal of the Royal Astronomical Society, 79: pp 987-1022.

Beaubouef, R.T., Casey, J.F., and Hall, S.A. 1988. A paleomagnetic study of the Skinner Cove Volcanic Assemblage, Western Newfoundland. Poster-Abstract; Eos, 69: no.44.

Beiersdorfer, R.E., and Day, H.W. 1995. Mineral paragenesis of pumpellyite in low-grade mafic rocks, in Low-grade metamorphism in mafic rocks (Schiffman, P., and Day, H.W., eds), Boulder, Colorado, GSA Special Paper 296: pp 5-27.

Bond, G.C. 1997. New constraints on Rodinia breakup ages from revised tectonic subsidence curves, in GSA Abstracts with Programs, 1997, vol. 29: p A-280.

Bond, G.C., Nickerson, P.A., and Kominz, M.A. 1984. Breakup of a supercontinent between 625 and 555 Ma- New evidence and implications for continental histories. Earth and Planetary Science Letters, 70: pp 325-345.

Bown, J.W., 1994. Melting and subsidence at rifts. Ph.D. Dissertation, University of Cambridge: 238 p.

Bown, J.W., and White, R.S. 1995. Finite duration rifting, melting and subsidence at continental margins, *in* Rifted Ocean-Continent Boundaries (Banda, E., et al., eds.). Kluwer, Netherlands: pp 31-54.

Brasier, M.D. 1992. Global ocean-atmosphere change across the Precambrian-Cambrian transition. Geological Magazine, 129: pp 161-168.

Buck, W.R. 1986. Small-scale convection induced by passive rifting: the cause for uplift of rift shoulders. Earth and Planetary Science Letters, 77: pp 362-372.

Burton, W.C., Froelich, A.J., Pomeroy, J.S., and Lee, K.Y. 1995. Geology of the Waterford Quadrangle, Virginia and Maryland, and the Virginia part of the Point of Rocks Quadrangle. USGS Bulletin, 2095: 30 pp.

Camire, G., La Fleche, M.R., and Jenner, G.A. 1995. Geochemistry of pre-Taconian mafic volcanism in the Humber Zone of the northern Appalachians, Quebec, Canada. Chemical Geology, 119: pp 55-77.

Cawood, P.A., McCausland, P.J.A., and Dunning, G.R. submitted. Opening Iapetus: Constraints from the Laurentian margin in Newfoundland. Geology

Cawood, P.A., van Gool, J.A.M., and Dunning, G.R., 1996, Geological development of eastern Humber and western Dunnage zones: Corner Brook - Glover Island region, Newfoundland: Canadian Journal of Earth Sciences, v. 33, p. 182-198.

Cawood, P.A., Williams, H., O'Brien, S.J., and O'Neill, P.P. 1988. Trip A1. A Geologic cross-section of the Appalachian Orogen. Field trip guidebook, Geological Association of Canada, 160p.

Dalla Salda, L.H., Cingolani, C.A., and Varela, R. 1992. The early Paleozoic orogenic belt of the Andes in southwestern South America: Result of Laurentia-Gondwana collision? Geology, 20: pp 617-620.

Dankers, P., and Lapointe, P. 1981. Paleomagnetism of Lower Cambrian volcanics and a crosscutting Cambro-Ordovician diabase dyke from Buckingham, (Quebec). Canadian Journal of Earth Sciences, 18: pp 1174-1186.

Dalziel, I.W.D. 1991. Pacific margins of Laurentia and east Antarctica-Australia as a conjugate rift pair: Evidence and implications for an Eocambrian supercontinent. Geology, 19: pp 598-601.

Dalziel, I.W.D. 1992. On the organization of American plates during the Neoproterozoic and the breakout of Laurentia. GSA Today 2:11, pp 237-241.

Dalziel, I.W.D. 1994. Precambrian Scotland as a Laurentia-Gondwana link -Origin and significance of cratonic promontories. Geology, 22: pp 589-592.

Dalziel, I.W.D. 1997. Neoproterozoic-Paleozoic geography and tectonics: Review, hypothesis, environmental speculation. GSA Bulletin, 109: pp 16-42.

Dalziel, I.W.D., Dalla Salda, L.H., and Gahagan, L.M. 1994. Paleozoic Laurentia-Gondwana interaction and the origin of the Appalachian-Andean mountain system. GSA Bulletin, 106: pp 243-252.

Dunlop, D.J., Ozdemir, O., and Schmidt, P.W. 1997. Paleomagnetism and paleothermometry of the Sydney Basin II. Origin of anomalously high unblocking temperatures. Journal of Geophysical Research, in press.

Eldholm, O., Skogseid, J, Planke, S., and Gladczenko, T.P. 1995. Volcanic margin concepts, in Rifted Ocean-Continent Boundaries (Banda, E., et al., eds.). Kluwer, Netherlands: pp 1-16.

Elston, D.P., and Bressler, S.L. 1977. Palaeomagnetic poles and polarity zonation from Cambrian and Devonian strata of Arizona. Earth and Planetary Science Letters, 36: pp 423-433.

Evans, D.A. 1998. True polar wander, a supercontinental legacy. Earth and Planetary Science Letters, in press.

Farr, M.R., and Gose, W.A. 1991. Palaeomagnetism of the Cambrian Moore Hollow Group, Texas: Evidence for a primary magnetization carried by detrital magnetite. Journal of Geophysical research, 96: pp 9895-9907.

Fyffe, L.R. and Swinden, H.S. 1991. Paleotectonic setting of Cambro-Ordovician rocks in the Canadian Appalachians. Geoscience Canada, 18: No. 4., pp 145-157.

Graham, J.W. 1949. The stability and significance of magnetism in sedimentary rocks. Journal of Geophysical Research, 54: pp 131-167.

Grotzinger, J.P., Bowring, S.A., Saylor, B.Z., Kaufman, A.J. 1995. Biostratigraphic and geochronologic constraints on early animal evolution. Science, 270: pp 598-604.

Grunow, A., Hanson, R., Wilson, T. 1996. Were aspects of the Pan-African deformation linked to Iapetus opening? Geology, 24: pp 1063-1066.

Gurnis, M., and Torsvik, T.H. 1994. Rapid drift of large continents during the late Precambrian and Palaeozoic: Palaeomagnetic constraints and dynamic models. Geology, 22: pp 1023-1026.

Harland, W.B. and Gayer, R.A. 1972. The Arctic Caledonides and earlier oceans. Geological Magazine, 109: pp 289-314.

Heller, P.L., Wentworth, C.M., and Poag, C.W. 1982. Episodic post rift subsidence of the U.S. Atlantic margin. GSA Bulletin, 93: pp 379-390.

Higgins, M.D., and van Breemen, O. in press. The age of the Sept Iles layered intrusion, Canada: Implications for the late Neoproterozoic/Cambrian history of south-eastern Canada. Journal of Geology.

Hoffman, P.F. 1991. Did the breakout of Laurentia turn Gondwana inside-out? Science, 252: pp 1409-1412.

Irving, E. 1964. Paleomagnetism and its application to geological and geophysical problems. New York, John Wiley and Sons, Inc., 399p.

Jansa, L.F., and Pe-Piper, G. 1985. Early Cretaceous volcanism on the northeastern American margin and implications for plate tectonics. Geological Society of America Bulletin, 96: pp 83-91.

Jarvis, G.T., and McKenzie, D.P. 1980. Sedimentary basin formation with finite extension rates. Earth and Planetary Science Letters, 48: pp 42-52.

Jenner, G.A., Dunning, G.R., Malpas, J., Brown, M., and Brace, T. 1991. Bay of Islands and Little Port complexes, revisited: Age, geochemical and isotopic evidence confirm suprasubduction-zone origin. Canadian Journal of Earth Sciences, 28: pp 1635-1652.

Jurdy, D.M., Stefanick, M., and Scotese, C.R. 1995. Paleozoic plate dynamics. Journal of Geophysical Research, 100: pp 17965-17975.

Kamo, S.L., and Gower, C.F. 1994. Note: U-Pb baddeleyite dating clarifies age of characteristic paleomagnetic remanence of Long Range dykes, southeastern Labrador. Atlantic Geology, 30: pp 259-262.

Kamo, S.L., Gower, C. F., and Krogh, T.E. 1989. A birthdate for the Iapetus Ocean? A precise U-Pb zircon and baddeleyite age for the Long Range dykes, S.E. Labrador. Geology, 17: pp 602-605.

Kamo, S.L., Krogh, T.E., and Kumarapeli, P.S. 1995. Age of the Grenville dyke swarm, Ontario-Quebec: implications for the timing of Iapetan rifting. Canadian Journal of Earth Sciences, 32: pp 273-280.

Keen, C.E. 1986. The dynamics of rifting: deformation of the lithosphere by active and passive driving forces. Geophysical Journal of the Royal Astronomical Society, 80: pp 95-120.

Keen, C.E., and Boutilier, R.R. 1995. Lithosphere-asthenosphere interactions below rifts, in Rifted Ocean-Continent Boundaries (Banda, E., et al., eds.). Kluwer, Netherlands: pp 17-30.

Kirschvink, J.L. 1980. The least-squares line and plane and the analysis of paleomagnetic data. Geophysical Journal of the Royal Astronomical Society, 62: pp 699-718.

Kirschvink, J.L., Ripperdan, R.L., and Evans, D.A. 1997. Evidence for a large-scale reorganization of early Cambrian continental masses by inertial interchange true polar wander. Science, 277: pp 541-545.

Knoll, A.H, and Walter, M.R. 1992. Latest Proterozoic stratigraphy and Earth history. Nature, 356: pp 673-678.

Kumarapeli, P.S. 1993. A plume-generated segment of the rifted margin of Laurentia, Southern Canadian Appalachians, seen through a completed Wilson Cycle. Tectonophysics, 219: pp 47-55.

Kumarapeli, P.S., St. Seymour, K., Pintson, H., and Hasselgren, E. 1988. Volcanism on the passive margin of Laurentian early Paleozoic analogue of Cretaceous volcanism on the northeastern American margin. Canadian Journal of Earth Sciences, 25: pp 1824-1833.

Kumarapeli, P.S., Dunning, G.R., Pintson, H., and Shaver, J. 1989. Geochemistry and U-Pb age of comenditic metafelsites of the Tibbit Hill Formation, Quebec Appalachians. Canadian Journal of Earth Sciences, 26: pp 1374-1383.

LaFleur, J., and Hogarth, D.D. 1981. K-Ar age determinations. Geological Survey of Canada, Paper 81-C, pp 27-34.

Li, Z.X. and Powell, C.M. 1993. Late Proterozoic to early Palaeozoic palaeomagnetism and the formation of Gondwana, *in* Gondwana 8: Assembly, evolution and dispersal (Findlay, R.H., et al., eds.) Rotterdam, A.A. Balkema: pp 9-21

Liou, J.G., de Capitani, C., and Frey, M. 1991. Zeolite equilibria in the system CaAlSi2O8-SiO2-H2O. New Zealand Journal of Geology and Geophysics, 34: pp 293-301.

MacNiociall, C., and Smethurst, M.A. 1994. Palaeozoic palaeogeography of Laurentia and its margins: A reassessment of palaeomagnetic data: Geophysical Journal International, 116: pp 715-725.

Malka, E., Stevenson, R.K., and David, J. 1996. The petrology and petrogenesis of the Mt. Rigaud alkaline syeno-granite, Quebec, in GAC-MAC annual meeting, Program with abstracts, Winnipeg: p A-61.

McCausland, P.J.A. 1995. Palaeomagnetism and U-Pb zircon age of the Skinner Cove Volcanics of western Newfoundland. Unpublished B.Sc. dissertation, Memorial University of Newfoundland. 87p.

McCausland, P.J.A., Hodych, J.P., and Dunning, G. 1996. Palaeomagnetism and U-Pb age of the Skinner Cove Volcanics of western Newfoundland: Implications for the late Neoproterozoic breakup of Rodinia, in Proterozoic evolution in the North Atlantic realm (compiled by Gower, C.F.) COPENA-ECSOOT-IBTA conference, Goose Bay, Labrador, Program with abstracts: p 122.

McElhinny, M.W., Cowley, J.A., and Edwards, D. 1978. Paleomagnetism of some rocks from peninsular India and Kashmir: Tectonophysics, 50: pp 41-54.

McKenzie, D.P. 1978. Some remarks on the development of sedimentary basins. Earth and Planetary Science Letters, 40: pp 25-32.

McMenamin, M.A.S., and McMenamin-Schulte, D.L.S. 1990. The Emergence of Animals: The Cambrian Breakthrough. Columbia University Press, New York, 217p.

Meert, J.G., and Van der Voo, R., 1996, Paleomagnetic and <sup>40</sup>Ar/<sup>39</sup>Ar Study of the Sinyai Dolerite, Kenya: Implications for Gondwana Assembly: Journal of Geology, v. 104, p. 131-142.

Meert, J.G., and Van der Voo, R., 1997, The assembly of Gondwana 800-540 Ma: Journal of Geodynamics, v. 23, p. 223-235.

Meert, J.G., Van der Voo, R., Powell, C.McA., Li, Z.X., McElhinny, M.W., Chen, Z., and Symons, D.T.A. 1993. A plate tectonic speed limit? Nature, 363: pp 216-217.

Meert, J.G., Van der Voo, R., and Payne, T.W. 1994. Paleomagnetism of the Catoctin volcanic province: A new Vendian-Cambrian apparent polar wander path for North America. Journal of Geophysical Research, 99: B3, pp 4625-4641.

Meschede, M. 1986. A method of discriminating between different types of mid-ocean ridge basalts and continental tholeites with the Nb-Zr-Y diagram. Chemical Geology, 56: pp 207-218.

Middleton, M.F., and Schmidt, P.W. 1992. Paleothermometry of the Sydney Basin. Journal of Geophysical Research, 87: pp 5351-5359.

Moores, E.M. 1991. Southwest U.S.-East Antarctic (SWEAT) connection: A hypothesis. Geology, 19: pp 425-428.

Murthy, G., Gower, C., Tubrett, M., and Patzold, R. 1992. Paleomagnetism of Eocambrian Long Range dykes and Double Mer Formation from Labrador, Canada. Canadian Journal of Earth Sciences, 29: pp 1224-1234.

Nicholas, C.J. 1996. The Sr isotopic evolution of the oceans during the 'Cambrian Explosion' Geological Society of London Journal, 153: pp 243-254.

Olive, V., Hebert, R., Vermette, D., Loubet, M. 1997. Geochemistry of Iapetus volcanic rocks, Quebec Appalachians: Nd, Sr isotopic compositions. American Journal of Science, 297: pp 418-439.

Oyarzun, R., Doblas, M., Lopez-Ruiz, J., and Maria Cebria, J. 1997. Opening of the central Atlantic and asymmetric mantle upwelling phenomena: Implications for long-lived magmatism in western North Africa and Europe. Geology, 25: pp727-730.

Pelechaty, S.M. 1996. Stratigraphic evidence for the Siberia-Laurentia connection and early Cambrian rifting. Geology, 24: pp 719-722.

Pimentel, M.M., Whitehouse, M.J., das G. Viana, M., Fuck, R.A., and Machado, N. 1997. The Mara Rosa Arc in the Tocantins Province: further evidence for Neoproterozoic crustal accretion in Central Brazil. Precambrian Research, 81: pp 299-310.

Pimentel, M.M., Fuck, R.A., and Jose Souza de Alvarenga, C. 1996. Post-Braziliano (Pan-African) high-K granitic magmatism in central Brazil: the role of Late Precambrian-early Cambrian extension. Precambrian Research, 80: pp 217-238.

Powell, C.M. 1995. Are Neoproterozoic glacial deposits preserved on the margins of Laurentia related to the fragmentation of two supercontinents?: Comment. Geology, 23: pp 1053-1054.

Pulliah, G., Irving, E., Buchan, K.L., and Dunlop, D.J. 1975. Magnetisation changes caused by burial depth and uplift. Earth and Planetary Science Letters, 28: pp 133-143.

Rapela, C., Toselli, A., Heaman, L., and Saavedra, J. 1990. Granite plutonism of the Sierras Pampeanas: An inner cordilleran Paleozoic arc in the southern Andes, *in* Plutonism from Antarctica to Alaska (Kay, S., and Rapela, C., eds.): pp 77-90.

Roydon, L., and Keen, C.E. 1980. Rifting process and thermal evolution of the continental margin of eastern Canada determined from subsidence data. Earth and Planetary Science Letters, 51: pp 343-361.

Simpson, E.L., and Sundberg, F.A. 1987. Early Cambrian age for synrift deposits of the Chilhowee Group of southwestern Virginia. Geology, 15: pp 123-126.

St-Julien, P., and Hubert, C. 1975. Evolution of the Taconian orogen in the Quebec Appalachians: American Journal of Science, 257A: pp 337-367.

Stern, R.J. 1994. Arc assembly and continental collision in the Neoproterozoic East African orogen: Implications for the consolidation of Gondwanaland. Annual Reviews of Earth and Planetary Science, 22: pp 319-351.

Stevens, R.K. 1970. Cambro-Ordovician flysch sedimentation and tectonics in west Newfoundland and their possible bearing on a Proto-Atlantic Ocean, in Flysch sedimentology in North America (Lajoie, J., ed), GAC Special paper, 7: pp 165-177.

Stockmal, G.S., and Waldron, J.W.F. 1993. Structural and tectonic evolution of the Humber Zone, western Newfoundland, 1: Implications of cross section through the Appalachian structural front, Port au Port Peninsula, Tectonics 12: pp 1056-1075.

Stockmal, G.S., Colman-Sadd, S.P., Keen, C.E., O'Brien, S.J., and Quinlan, G. 1987. Collision along an irregular margin: a regional plate tectonic interpretation of the Canadian Appalachians. Canadian Journal of Earth Sciences, 24: pp 1098-1107.

Strong, D.F. 1974. An "off-axis" alkali volcanic suite associated with the Bay of Islands ophiolites, Newfoundland. Earth and Planetary Science Letters, 21: pp 301-309.

Symons, D.T.A., and Chiasson, A.D. 1991. Paleomagnetism of the Callander Complex and the Cambrian apparent polar wander path for North America. Canadian Journal of Earth Sciences, 28: pp 355-363.

Tanczyk, E. I., Lapointe, P., Morris, W.A., and Schmidt, P.W. 1987. A paleomagnetic study of the layered mafic intrusion at Sept-Isles, Quebec. Canadian Journal of Earth Sciences, 24: pp 1431-1438.

Thomas, W.A. 1991, The Appalachian-Ouachita rifted margin of southeastern North America: Geological Society of America, Bulletin, v. 103, p. 415-431.

Thomas, W.A., and Whiting, B.M. 1995. The Alabama promontory: Example of the evolution of an Appalachian-Ouachita thrust-belt recess at a promontory of the rifted continental margin, in Current perspectives in the Appalachian-Caledonian Orogen (Hibbard et al., eds), GAC Special Paper 41: pp 3-20.

Thompson, R.N., and Gibson, S.A. 1991. Subcontinental mantle plumes, hotspots, and pre-existing thinspots. Journal of the Geological Society of London, 148: pp 973-977.

Troelsen, J. 1947. Stratigraphy and structure of the Bonne Bay-Trout River area. Ph.D. dissertation, Yale University, New Haven, Connecticut, USA.

Torsvik, T.H., Smethurst, M.A., Meert, J.G., Van der Voo, R., McKerrow, W.S., Brasier, M.D., Sturt, B.A., and Walderhaug, H.J., 1996, Continental break-up and collision in the Neoproterozoic and Paleozoic - A tale of Baltica and Laurentia: Earth Science Reviews, v. 40, p. 229-258.

Trompette, R., 1997, Neoproterozoic (~600 Ma) aggregation of Western Gondwana: a tentative scenario: Precambrian Research, v. 82, p. 101-112.

Tucker, R.D., and McKerrow, W.S. 1995. Early Paleozoic chronology: A review in light of new U-Pb zircon ages from Newfoundland and Britain. Canadian Journal of Earth Sciences, 32: pp 368-379.

Unrug, R. 1996. The assembly of Gondwanaland. Episodes, 19: pp 11-20.

Valentine, J.W., and Moores, E.M. 1970. Plate-tectonic regulation of faunal diversity and sea level: a model. Nature 228: p 657.

van Alstine, D.R., and Gillett, S.L. 1979. Palaeomagnetism of the upper Precambrian sedimentary rocks from the Desert Range, Nevada. Journal of Geophysical Research, 84: pp 4490-4500.

Wanless, R.K., Stevens, R.D., Lachance, G.R., and Delabio, R.N. 1970. Age determinations and geological studies. Geological Survey of Canada, Paper 69-2A.

Wasteneys, H.A., Clark, A.H., Farrar, E., Langridge, R.J. 1995. Grenvillian granulite-facies metamorphism in the Arequipa Massif, Peru: a Laurentia-Gondwana link. Earth and Planetary Science Letters, 132: pp 63-73.

Watson, G.S. 1956. A test for randomness of directions. Monthly notices of the Royal Astronomical Society, Geophysics Supplement, 7: pp 160-161.

White, R.S. 1992. Magmatism during and after continental break-up, in Magmatism and the causes of continental break-up (Storey, B.C., et al., eds.): Special paper of the Geological Society of London, 68: pp 1-16.

White, R.S., and McKenzie, D. 1989. Magmatism at rift zones: The generation of volcanic continental margins and flood basalts. Journal of Geophysical Research, 94: pp 7685-7729.

Williams, H. 1973. Bay of Islands map-area, Newfoundland. Geological Survey of Canada, Paper 72-34.

Williams, H. 1975. Structural succession, nomenclature, and interpretation of transported rocks in western Newfoundland. Canadian Journal of Earth Sciences, 12: pp1874-1894.

Williams, H. 1978. Tectonic Lithofacies map of the Appalachian Orogen. Map 1, Memorial University of Newfoundland.

Williams, H. 1979. Appalachian Orogen in Canada: Canadian Journal of Earth Sciences, 16: pp 729-807.

Williams, H., 1995, Geology of the Appalachian-Caledonian Orogen in Canada and Greenland, Volume F-1 in Decade of North American Geology: Ottawa, Geological Survey of Canada, p. 944.

Williams, H., and Hiscott, R.N. 1987. Definition of the Iapetus rift-drift transition in western Newfoundland. Geology, 15: pp 1044-1047.

Wilson, J.T. 1966. Did the Atlantic close and then re-open? Nature, 211: pp 676-681.

Young, G.M. 1995. Are Neoproterozoic glacial deposits preserved on the margins of Laurentia related to the fragmentation of two supercontinents? Geology, 23: pp 153-156.

Zijderveld, J.D.A. 1967. A.C. demagnetization of rocks: Analysis of results. in Methods in Paleomagnetism (Collinson et el., eds.), Elsevier, New York, pp 254-286.

## APPENDIX A

The declination (DECL) and inclination (INCL.) in degrees and the magnetic moment (MOMENT) in c.g.s. units are listed during stepwise demagnetizations for each specimen carrying a stable component of remanence. Magnetization in c.g.s. units can be obtained by dividing the magnetic moment by simple volume which is ~10 cm<sup>3</sup>. These c.g.s. magnetizations can then be converted to A/m by multiplying by 10<sup>3</sup>.

The alternating field strengths (FIELD) are given in Oersteds and should be divided by 10 to obtain the mT equivalent. The temperatures used in thermal demagnetization (TEMP) are listed in °C. Thermal demagnetization was usually preceded by alternating field demagnetization to 15 or 20 mT and are indicated between 0 and the 200°C initial step of thermal demagnetization.

A list of sites and their constituent samples follows.

Site 6 Trachyte	Site 1 Ankaramite
19794-22.2	17794-1.2.2
19794-23.2A	17794-2.2 <b>A</b>
19794-24.2	17794-3.1B
19794-25.1	17794-4.1C
19794-26.1	17794-5.3
19794-27.1	21794-25.1c
Site 3 Trachybasalt	Site 4 Pillowed Headland Basalt
Site 3 Trachybasalt 18794-6.2b	Site 4 Pillowed Headland Basalt 19794-16.1
•	
18794-6.2b	19794-16.1
18794-6.2b 18784-7.3	19794-16.1 19794-17.1
18794-6.2b 18784-7.3 18794-8.1	19794-16.1 19794-17.1 19794-18.1
18794-6.2b 18784-7.3 18794-8.1 18794-9.1	19794-16.1 19794-17.1 19794-18.1 19794-19.1

Site 9 Alkali Basalt 21794-7.1 21794-8.2 21794-9.1 21794-10.1	Site 5 Alkali Basalt 21794-13.1 21794-14.3 21794-15.1a 21794-16.1a
21794-11.1 21794-12	21794-17b 21794-18b
Site 12 Pinnacle	Ankaramite Site 11 Mafic Dyke
13995-1.1b	12995-8.2b
13995-6.1b	12995-9.2b
13995-2.1	12995-11.1a
13995-3.2	12995-12.1a
13995-5.2b 13995-5.2a	12995-7.1a 12995-10.2
Site 10 Trachyte Dyke 12995-1.1b 12995-5.2 12995-6.2 12995-2.1a 12995-3.1a 12995-4.2.2	Site 15 Trachybasalt 16995-2.2a 16995-3.1 16995-4.2a 16995-6.1 16995-20.2 16995-5.1 16995-1.2a
Site 14 Trachyte Dyke	Site 13 Mafic Dyke
13995-13.2b	13995-8.3
13995-15a	13995-9A
16995-17.2 16995-18.1b	13995-10.1a 13995-11.1
16995-19	13995-12.2
13996-1.2	13995-7.1b
13996-2.2b	
13996-3.2	
13996-4.1a	
13995-14.2a	
to the control of the	

Site 7 Cliff Pillow Basalt	Site 8 Main Sea Stack
21794-19.1a	Pillows
21794-20.la	21794-1.1a
21794-21.2	21794-3.1b
21794-22.1a	21794-4.2
21794-23.1a	21794-5.1a
21794-24.la	21794-6.2

Site 2 Ankaramite (U-Pb Dated)	Site 16 Pillowed Headland
17994-6.1b	Mafic Dyke
17794-9.2	16995-26.1
17794-10.2b	16995-22
17794-7.1a	16995-24
17794-8.1	16995-25
21794-26.1a	

## Conglomerate Test Clasts

Amygdaloidal Alkaki Basalt	Trachybasalt
17794-11 2	19794-1.4
17794-12.2b	19794-2.1
17794-13.1A	19794-3.1
17794-14.1a	19794-4.1
17794-15.2	19794-5.2
18794-1.3a	19794-6
18794-2.1A	19794-7
18794-3.3	19794-8
18794-4.2	19794-9
18794-5	19794-10
19794-11.2A	1993-1.1 <b>A</b>
19794-12.1A	1993-2B1A
19794-13.2	1993-3
19794-14.2A	1993-4.1
19794-15	1993-5.1
	199 <b>3-</b> 6.1 <b>A</b>
	18794-13.1
	18794-14.1
	18794-15.1
	18794-16.2
	18794-17.2

```
SPEC. NAME: 18794-7.3 Site 3
SPEC. NAME: 18794-6.2B Site 3
                          MOMENT
                                       FIELD
                                                       INCL.
                                                                  MOMENT
TEMP
         DECL.
                INCL.
                                                DECL.
                       1.545E-02
    0
         347.1
                 55.9
                                           0
                                                360.0
                                                        50.9
                                                               9.926E-03
    5
         348.9
                 53.4
                       1.484E-02
                                          25
                                                  1.4
                                                        51.5
                                                              9.281E-03
                                                              8.611E-03
   10
         349.4
                 51.5
                       1.381E-02
                                          50
                                                357.4
                                                        52.9
   15
         349.5
                 50.6
                       1.238E-02
                                          75
                                                357.0
                                                        53.3
                                                              7.468E-03
  200
         349.1
                 49.1
                       1.197E-02
                                         100
                                                358.8
                                                        53.2
                                                               6.142E-03
  250
         349.1
                 49.2
                       1.180E-02
                                         125
                                                  2.2
                                                        52.6
                                                               4.883E-03
  300
         348.0
                 48.9
                       1.157E-02
                                         150
                                                  3.0
                                                        52.6
                                                               4.034E-03
  350
         348.2
                 48.7
                       1.118E-02
                                         175
                                                  3.0
                                                        53.7
                                                               3.305E-03
  400
        350.3
                 48.6
                       1.037E-02
                                         200
                                                  5.2
                                                        52.8
                                                              2.850E-03
  450
        349.5
                                                        53.3
                 48.0
                       8.961E-03
                                         250
                                                 6.9
                                                              1.989E-03
  500
         349.2
                 45.6
                       3.971E-03
                                         300
                                                 6.2
                                                        53.8
                                                              1.496E-03
  520
         348.7
                 49.8
                       7.971E-04
                                         350
                                                 6.1
                                                        54.1
                                                               1.071E-03
  540
         345.4
                 57.9
                       2.684E-04
                                         400
                                                 12.1
                                                        55.1
                                                              7.168E-04
  560
         308.0
                 75.6
                       9.684E-05
  580
         244.4
                 58.1
                       9.227E-05
  600
        211.6
                 67.2
                       8.629E-05
SPEC. NAME: 18794-8.1 Site 3
                                       SPEC. NAME: 18794-9.1
                                                                 Site 3
               INCL.
FIELD
        DECL.
                          MOMENT
                                       FIELD
                                               DECL.
                                                       INCL.
                                                                 MOMENT
                 67.0
                                               351.3
    0
        330.6
                       1.051E-02
                                           0
                                                        61.8
                                                              1.090E-02
   25
        323.5
                 61.9
                       1.011E-02
                                          25
                                               349.0
                                                        59.3
                                                              1.051E-02
   50
        323.4
                 63.4
                       9.756E-03
                                          50
                                               348.2
                                                        60.9
                                                              9.697E-03
   75
        316.6
                 61.8
                       8.315E-03
                                          75
                                               347.7
                                                        60.0
                                                              8.380E-03
  100
        312.3
                 58.2
                       7.225E-03
                                         100
                                               346.1
                                                        59.3
                                                              7.005E-03
  125
        313.2
                                               347.8
                                                        57.7
                 58.9
                       6.107E-03
                                         125
                                                              5.513E-03
                                                        58.2
  150
        312.6
                 55.2
                       4.852E-03
                                         150
                                               348.7
                                                              4.565E-03
  175
        312.5
                 54.9
                       3.953E-03
                                         200
                                               351.4
                                                        58.8
                                                              3.33E-03
  200
        313.6
                 54.7
                       3.239E-03
                                         250
                                               352.1
                                                        59.1
                                                              4.800E-03
                                                        59.1
  250
        316.0
                 56.7
                       2.162E-03
                                         251
                                               352.1
                                                              2.400E-03
  300
        315.7
                                                        57.9
                 58.5
                       1.475E-03
                                         300
                                               351.1
                                                              1.761E-03
  350
        316.6
                 58.6
                       1.030E-03
                                         350
                                               352.6
                                                        60.5
                                                              1.344E-03
                                         400
                                               350.5
                                                        59.0
                                                              9.987E-04
SPEC. NAME: 18794-10.1 Site 3
                                       SPEC. NAME: 18794-12.1a Site 3
                                                                 MOMENT
FIELD
        DECL.
               INCL.
                          MOMENT
                                       FIELD
                                               DECL.
                                                       INCL.
                      9.356E-03
                                               333.1
    0
        352.4
                59.9
                                          0
                                                        59.5
                                                              2.451E-02
                                                        59.4
                                               332.2
   25
        351.1
                 60.9 9.215E-03
                                          25
                                                              2.423E-02
   50
        349.4
                60.2 8.749E-03
                                          50
                                               329.7
                                                        59.2
                                                              2.355E-02
   75
        348.9
                      8.130E-03
                                         75
                                               328.3
                                                        59.1
                60.2
                                                              2.264E-02
  100
        346.6
                59.7
                      7.356E-03
                                         100
                                               326.8
                                                        59.3
                                                              2.144E-02
  150
        345.6
                59.6
                      5.852E-03
                                         125
                                               325.6
                                                        59.2
                                                              2.016E-02
 200
        345.4
                59.5
                      4.308E-03
                                        150
                                               323.7
                                                        59.1
                                                              1.871E-02
 250
        346.3
                60.3
                      3.348E-03
                                        175
                                               322.6
                                                        59.1
                                                              1.667E-02
 300
        347.7
                60.1
                       2.561E-03
                                        200
                                               322.3
                                                        59.0
                                                              1.482E-02
        350.0
                                                        59.1
 400
                62.4 1.434E-03
                                        250
                                               321.1
                                                              1.139E-02
 500
        359.3
                63.2 8.613E-04
                                        300
                                               319.3
                                                        59.3
                                                              8.281E-03
                                        350
                                               319.5
                                                        58.9
                                                              5.799E-03
                                         400
                                               321.0
                                                        59.2
                                                              4.268E-03
                                         500
                                               312.1
                                                        61.1
                                                              2.078E-03
```

```
SPEC. NAME: 12995-7.1A Site 11
                                  SPECIMEN NAME: 12995-8.2B Site 11
FIELD
       DECL.
              INCL.
                        MOMENT
                                   FIELD
                                          DECL.
                                                  INCL.
    0
         97.8
               82.4
                     3.158E-02
                                      0
                                           235.8
                                                   73.3
                                                        8.546E-05
               88.4
   25
         95.4
                     2.263E-02
                                      25
                                           230.5
                                                   69.6
                                                        7.682E-05
               86.2
   50
         87.4
                     1.771E-02
                                      50
                                           232.6
                                                   68.9
                                                        7,495E-05
   75
               87.3
        112.5
                     1.291E-02
                                      75
                                           233.4
                                                   68.7
                                                        7.188E-05
              87.1
  100
       152.6
                    9.273E-03
                                     100
                                           232.6
                                                   68.2
                                                        6.668E-05
  125
       165.9
              86.6 6.756E-03
                                     150
                                           226.7
                                                   71.2
                                                        5.810E-05
  150
       176.1
               85.6
                    5.126E-03
                                     200
                                           224.8
                                                   70.7
                                                        4.702E-05
  200
       205.8
              86.5
                     3.117E-03
                                           219.1
                                                   69.1
                                     250
                                                        3.892E-05
               82.4 2.093E-03
 250
       192.4
                                                   75.1
                                     300
                                           213.1
                                                        3.200E-05
                                     400
                                           358.1
                                                   68.0
                                                        1.690E-05
                                     500
                                           234.3
                                                   31.4 3.263E-05
                                SPECIMEN NAME: 12995-10.2 Site 11
SPECIMEN NAME:12995-9.2B Site 11
TEMP
       DECL. INCL.
                       MOMENT
                                   FIELD DECL. INCL.
                                                           MOMENT
    0
       143.8
              -4.1 1.845E-04
                                  0
                                           254.0
                                                  53.8
                                                        7.150E-05
               -4.2
   5
       143.8
                     1.865E-04
                                      25
                                           266.2
                                                  50.1 6.634E-05
                    1.767E-04
                                     50
  10
       147.0
               -3.8
                                           258.2
                                                  46.4
                                                        6.163E-05
  300
        11.7
              44.2
                     6.534E-05
                                     75
                                           255.8
                                                  44.7
                                                        5.747E-05
  350
       176.0
              61.1
                     1.458E-04
                                    100
                                           257.5
                                                   41.5
                                                        5.259E-05
              62.6
  400
       181.3
                     1.303E-04
                                    150
                                           257.0
                                                   36.1
                                                        4.626E-05
                    4.813E-05
  475
       179.0 -26.8
                                     200
                                           268.9
                                                   31.4
                                                        3.391E-05
 500
       184.6 -32.6 4.576E-05
                                     250
                                           258.0
                                                   21.6 3.060E-05
                                     300
                                           262.9
                                                   43.7 2.378E-05
                               SPEC. NAME: 12995-12.1A Site 11
SPEC. NAME: 12995-11.1A Site 11
TEMP
       DECL. INCL.
                       MOMENT
                                  FIELD
                                         DECL. INCL.
                                                           MOMENT
                                           232.7
                                                  73.5
   0
       337.3
              75.5
                    4.067E-02
                                   0
                                                        3.942E-05
                                           232.5
    3
       332.4
               75.6
                    3.878E-02
                                      25
                                                   73.6 3.412E-05
    5
       340.2
              76.8
                    3.400E-02
                                     50
                                           234.4
                                                  74.6
                                                        3.383E-05
 200
       342.4
             31.2
                     1.620E-02
                                     75
                                           232.9
                                                  75.4
                                                        3.316E-05
 250
       346.7
             83.3
                     1.211E-02
                                    100
                                          234.0
                                                  75.5
                                                        3.155E-05
 300
       341.9
              85.5
                     9.182E-03
                                    150
                                          230.4
                                                  76.3 2.707E-05
 350
       359.0
              86.3
                     7.710E-03
                                    200
                                         223.7
                                                  78.6 2.253E-05
 400
       28.2
             87.9
                     6.157E-03
                                   250
                                         226.2
                                                 77.3 1.884E-05
 450
       108.0
             88.5
                     4.899E-03
                                    300
                                         203.8 81.7 1.536E-05
       122.9 84.7
 500
                     2.997E-03
                                    400
                                          15.0 78.0 8.255E-06
 520
       142.4
                     2.820E-03
             84.7
 540
       129.3
             85.5
                     2.269E-03
 560
       177.8
             88.3
                    1.979E-03
 580
       218.7
                     7.327E-04
              64.1
 600
       206.5
              37.3
                    2.932E-04
 620
       229.3
               20.8 1.357E-04
 640
       219.5
             14.5 1.141E-04
```

```
SPEC. NAME: 13995-1.1b TH Site12
                                      SPEC. NAME: 13995-2.1 Site 12
TEMP
        DECL.
                INCL.
                          MOMENT
                                      FIELD
                                               DECL.
                                                      INCL.
                                                                 MOMENT
    0
        341.9
                 67.7
                       3.994E-03
                                          0
                                               281.4
                                                       39.3
                                                              1.439E-02
    5
        329.9
                 73.2
                       3.309E-03
                                          25
                                               279.0
                                                       38.4
                                                              1.411E-02
        318.9
                                          50
                                               276.1
   10
                 73.2
                       2.423E-03
                                                       37.7
                                                              1.343E-02
        327.4
                 76.7
   15
                       1.825E-03
                                         75
                                               273.2
                                                       35.3
                                                              1.279E-02
  200
        248.2
                 76.1
                       9.387E-04
                                        100
                                               272.5
                                                       35.2
                                                              1.271E-02
  300
        228.5
                 78.9
                       7.202E-04
                                        150
                                               270.8
                                                       29.4
                                                              1.124E-02
  350
        236.7
                 80.6
                       5.986E-04
                                        200
                                               271.0
                                                       25.5
                                                              9.831E-03
  400
        263.3
                 81.6
                       5.362E-04
                                        250
                                               269.3
                                                       21.8
                                                              9.032E-03
  450
        234.5
                 71.4
                       3.947E-04
                                        300
                                               272.2
                                                       23.1
                                                              7.027E-03
  475
                 69.2
                                               277.3
        242.4
                       2.966E-04
                                        350
                                                       20.2
                                                              5.443E-03
  500
        245.5
                 68.5
                       2.259E-04
                                        400
                                               267.3
                                                       19.6
                                                              4.665E-03
  525
        221.4
                 67.6
                       1.155E-04
                                        500
                                               282.8
                                                       26.6
                                                              2.366E-03
  550
        200.8
                 -0.6
                       5.430E-05
                                         600
                                               295.8
                                                              1.401E-03
                                                       13.5
SPEC. NAME: 13995-3.2 Site 12
                                      SPEC. NAME: 13995-5.2A Site 12
                                               DECL.
                                                      INCL.
FIELD
        DECL.
               INCL.
                                      FIELD
                        MOMENT
                                                                 MOMENT
    0
        239.0
                68.8
                       7.127E-03
                                         0
                                               297.6
                                                       61.1
                                                             1.612E-02
   25
        242.3
                 67.5
                       6.977E-03
                                         25
                                               295.7
                                                       57.4
                                                             1.530E-02
   50
        240.8
                 65.3
                       6.667E-03
                                         50
                                               289.6
                                                       57.7
                                                              1.402E-02
   75
        240.6
                 60.3
                       6.179E-03
                                         75
                                               284.3
                                                       53.2
                                                              1.257E-02
  100
                                        100
        241.7
                 58.3
                       5.611E-03
                                               278.2
                                                       50.7
                                                              1.114E-02
  125
        239.7
                 53.7
                       4.915E-03
                                        125
                                               273.2
                                                       48.6
                                                              1.037E-02
  150
        242.0
                50.5
                       4.612E-03
                                        150
                                               274.3
                                                       44.8
                                                              9.200E-03
  200
        245.7
                48.5
                       3.938E-03
                                        200
                                               273.7
                                                       39.2
                                                              7.568E-03
                                        250
  250
        255.6
                45.1
                       3.131E-03
                                               274.2
                                                       35.0
                                                              6.053E-03
        253.2
  300
                       2.748E-03
                                        300
                                               274.1
                                                       30.5
                                                              5.043E-03
                38.3
  400
        265.1
                54.5
                      1.292E-03
                                        350
                                               275.9
                                                       30.2
                                                              3.924E-03
  500
        325.3
                40.3 7.051E-04
                                        400
                                               283.2
                                                       27.4
                                                              3.053E-03
                                        500
                                               270.3
                                                       28.5
                                                              1.964E-03
                                        600
                                               304.9
                                                       40.1 1.082E-03
SPEC. NAME:13995-5.2b TH Site 12
                                      SPEC. NAME: 13995-6.1B Site 12
TEMP
        DECL. INCL.
                         MOMENT
                                      FIELD
                                               DECL.
                                                      INCL.
                                                                 MOMENT
    0
                                                              2.164E-02
        299.0
                53.7
                       1.043E-02
                                          0
                                               142.5
                                                       76.2
    5
        285.6
                                         25
                                               147.2
                 45.3
                      1.119E-02
                                                       77.8
                                                             2.023E-02
                                         50
                                                       79.7
   10
        278.8
                 32.6
                     1.055E-02
                                               144.0
                                                             1.656E-02
   15
        274.4
                 24.5
                      9.676E-03
                                         75
                                               141.6
                                                       80.4
                                                             1.256E-02
   20
        274.2
                17.2
                     8.735E-03
                                        100
                                               147.2
                                                       79.8
                                                              9.318E-03
   25
        276.2
                13.0
                      7.491E-03
                                        125
                                               142.2
                                                       80.4
                                                              7.466E-03
  200
        270.0
                      8.455E-03
                                        150
                                               146.8
                                                       80.2
                                                              5.648E-03
                 8.5
  300
        273.8
                                        175
                 7.9
                      8.192E-03
                                               146.6
                                                       80.5
                                                              4.355E-03
  350
        274.9
                 2.8 8.098E-03
                                        200
                                               141.7
                                                       78.8
                                                              3.373E-03
        278.4
                                               145.3
                                                       78.6
  400
                                        225
                 0.6
                      7.688E-03
                                                             2.684E-03
  450
        277.6
                                        250
                                               142.3
                                                              2.234E-03
                ~3.0
                      6.920E-03
                                                       79.3
  475
        278.8
                -4.7
                      6.687E-03
                                        300
                                               133.3
                                                       80.8 1.540E-03
  500
        279.3
                -7.4
                      6.260E-03
  525
        281.4
                -9.3
                       4.718E-03
  550
        273.4
                -6.6 3.479E-04
  575
        224.4
                19.5 1.624E-04
```

```
SPEC. NAME: 17794-1.2.2 Site 1
                                      SPEC. NAME: 17794-2.2A Site 1
                                      FIELD
FIELD
        DECL.
               INCL.
                         MOMENT
                                              DECL.
                                                     INCL.
                84.2
                                          0
                                                       75.6 2.077E-02
    0
        264.1
                       3.659E-02
                                              277.9
  100
        262.0
                 82.5 1.235E-02
                                        100
                                              203.8
                                                       83.4
                                                            1.118E-02
  125
        257.1
                81.4 8.900E-03
                                        125
                                              202.2
                                                       82.6 8.046E-03
  150
        257.6
                80.5 6.274E-03
                                        150
                                              199.7
                                                       80.8
                                                             5.443E-03
  175
        262.0
                79.3
                      4.504E-03
                                        175
                                              197.4
                                                      79.7
                                                             3.904E-03
  200
        261.2
                78.9
                      3.336E-03
                                        200
                                              200.4
                                                      77.7
                                                             2.886E-03
  225
        263.0
                77.4 2.472E-03
                                        225
                                              205.2
                                                      79.5
                                                             2.107E-03
  250
        261.5
                75.3 1.820E-03
                                        250
                                              203.8
                                                       78.4
                                                             1.494E-03
  300
        264.5
                74.1 1.185E-03
                                                      78.6
                                        275
                                              211.6
                                                            1.148E-03
  325
        272.6
                73.0
                                                      74.8
                      8.777E-04
                                        300
                                              206.3
                                                             9.459E-04
        277.0
  350
                72.2 6.961E-04
                                        325
                                              219.8
                                                      71.9
                                                             6.354E-04
  375
        255.9
                76.0 5.919E-04
                                        350
                                              207.0
                                                      79.0
                                                             4.612E-04
  400
        299.9
                78.0 3.912E-04
                                        375
                                              215.0
                                                      81.7
                                                             4.185E-04
                                        400
                                              202.3
                                                      72.3
                                                             2.732E-04
                                        425
                                              272.3
                                                      76.1
                                                            1.822E-04
SPEC. NAME: 17794-3.1B Site 1
                                      SPEC. NAME: 17794-4.1C Site 1
FIELD
        DECL.
               INCL.
                         MOMENT
                                      FIELD
                                              DECL.
                                                     INCL.
                                                                MOMENT
                                                             2.447E-02
    0
         11.1
                59.7
                      2.243E-02
                                          0
                                               19.8
                                                      63.0
                     6.946E-03
                73.8
  100
         36.7
                                        100
                                               31.9
                                                      70.7
                                                             1.132E-02
                78.1
  125
         53.6
                      4.771E-03
                                        125
                                               33.2
                                                      73.9
                                                             8.489E-03
                78.8
  150
         76.5
                      3.340E-03
                                        150
                                               33.9
                                                      75.7
                                                             6.202E-03
        105.8
                77.6
  200
                                        175
                                               29.8
                                                      76.9
                      1.686E-03
                                                            4.411E-03
                74.3
  225
        117.4
                                        200
                                               35.5
                                                      80.1
                      1.286E-03
                                                             3.275E-03
        117.3
                71.6 9.648E-04
                                        225
  250
                                               30.0
                                                      81.1
                                                             2.458E-03
                72.7
                      7.227E-04
  275
        123.1
                                        250
                                               15.2
                                                      80.8
                                                             1.807E-03
                73.3 5.880E-04
  300
        130.2
                                        275
                                               19.1
                                                      80.0
                                                             1.350E-03
  325
        110.4
                62.6
                                        300
                                               0.5
                                                      81.6
                      3.420E-04
                                                             1.139E-03
  350
        150.9
                71.8 2.452E-04
                                        325
                                              359.4
                                                      79.4
                                                             7.851E-04
                                        350
                                              357.6
                                                      80.5
                                                             6.500E-04
                                        375
                                              18.9
                                                      81.6
                                                             5.851E-04
                                                             2.982E-04
                                        400
                                              354.4
                                                      70.6
                                        425
                                              325.5
                                                      76.0
                                                             3.082E-04
                                        450
                                               14.7
                                                      72.6 3.811E-04
SPEC. NAME: 17794-5.3
                                      SPEC. NAME: 21794-25.1c Site 1
                        Site 1
FIELD
        DECL.
               INCL.
                         MOMENT
                                      FIELD
                                              DECL. INCL.
                                                                MOMENT
                74.8 3.952E-02
                                                             2.913E-02
   0
        335.6
                                         0
                                              220.1
                                                      62.8
  100
        349.5
                77.1 1.672E-02
                                        100
                                              201.0
                                                      50.3
                                                             5.351E-03
  125
        349.3
                77.6 1.264E-02
                                        125
                                              197.5
                                                      62.0
                                                             6.601E-03
  150
        355.5
                77.7 9.414E-03
                                        150
                                              198.1
                                                      63.6
                                                            4.659E-03
 175
        347.6
                77.4 7.284E-03
                                        175
                                             198.4
                                                      60.5
                                                             3.518E-03
                75.9
                                        200
                                                      60.7
 200
        341.3
                      5.699E-03
                                             220.6
                                                             2.379E-03
 225
        342.7
                80.9 4.566E-03
                                        225
                                                      63.9
                                             215.9
                                                             1.772E-03
                80.0
                                                      55.6
  250
        342.7
                      3.448E-03
                                        250
                                             217.8
                                                            1.445E-03
                79.0 2.716E-03
  275
        341.6
                                        275
                                              235.8
                                                      46.1
                                                             1.187E-03
  300
        347.7
                82.5
                     2.141E-03
                                        300
                                              230.2
                                                      48.9
                                                             8.430E-04
                84.0
 325
        339.1
                      1.749E-03
                                        325
                                              232.4
                                                      52.1
                                                             6.096E-04
 350
        328.0
                79.0
                     1.572E-03
                                        350
                                              254.2
                                                      36.1
                                                             6.624E-04
        315.8
                77.8 1.116E-03
                                        350
                                              275.3
                                                      22.0
 375
                                                             6.268E-04
                85.3 1.074E-03
                                        375
 400
        111.8
                                              285.1
                                                      18.9 7.993E-04
 425
        320.4
                74.5 6.623E-04
  450
        247.2
                85.9 6.934E-04
```

```
SPEC. NAME: 19794-16.1 Site 4
                                       SPEC. NAME: 19794-17.1
FIELD
        DECL.
                INCL.
                           MOMENT
                                       FIELD
                                                DECL.
                                                        INCL.
    0
         23.0
                 72.3
                       1.816E-02
                                            0
                                                347.5
                                                         58.3
                                                               2.519E-02
   25
         21.2
                 73.2
                       1.744E-02
                                           25
                                                343.0
                                                         66.9
                                                               2.195E-02
   50
         13.5
                 71.4
                       1.535E-02
                                           50
                                                345.3
                                                         69.8
                                                               1.924E-02
                                                344.8
                                                               1.630E-02
   75
                 72.7
                       1.320E-02
                                           75
                                                         71.6
         10.2
  100
         10.6
                 73.0
                                          100
                                                345.2
                                                         70.9
                                                               1.311E-02
                       1.100E-02
                 72.3
                                                345.7
                                                         69.8
  125
          8.8
                       8.958E-03
                                          125
                                                               1.033E-02
          7.3
                 71.9
                       7.139E-03
                                                346.0
  150
                                          150
                                                         68.7
                                                               7.979E-03
  175
          7.1
                 71.3
                       5.727E-03
                                          175
                                                344.4
                                                         67.1
                                                               6.288E-03
                 70.7
  200
          8.2
                        4.382E-03
                                          200
                                                344.1
                                                         65.7
                                                               4.704E-03
  250
                 71.0
                        2.963E-03
                                          250
                                                               3.130E-03
         11.6
                                                341.6
                                                         65.8
  300
                 70.2
                        2.083E-03
                                          300
                                                339.8
                                                         62.7
                                                               2.107E-03
          6.4
  350
         16.6
                 70.8
                       1.427E-03
SPEC. NAME: 19794-18.1 Site 4
                                       SPEC. NAME: 19794-19.1 Site 4
FIELD
        DECL.
                INCL.
                           MOMENT
                                       FIELD
                                                DECL.
                                                       INCL.
                                                                   MOMENT
    0
         54.7
                 70.6
                       2.224E-02
                                            0
                                                326.4
                                                         82.2
                                                               1.576E-02
   25
         54.3
                 69.9
                       2.170E-02
                                           25
                                                325.9
                                                         80.6
                                                               1.461E-02
   50
                 72.5
         53.6
                       1.930E-02
                                           50
                                                356.9
                                                         81.5
                                                               1.481E-02
   75
                 74.9
                                           75
                                                         80.2
                                                               1.424E-02
         42.8
                       1.641E-02
                                                  6.9
  100
         37.2
                 75.6
                       1.410E-02
                                          100
                                                         77.1
                                                               1.314E-02
                                                 18.3
                                                         75.6
                 76.7
                                                 22.6
  125
         28.4
                       1.170E-02
                                          125
                                                               1.199E-02
                 76.6
                       9.799E-03
                                                         75.2
                                                               1.065E-02
  150
         21.1
                                          150
                                                 21.3
                 76.3
                                                         74.5
  175
         19.0
                       8.044E-03
                                          175
                                                 20.3
                                                               9.226E-03
  200
         18.9
                 76.8
                       6.637E-03
                                                 20.3
                                                         73.6
                                                               7.917E-03
                                          200
                 77.0
                                                         72.4
  250
         21.2
                       4.473E-03
                                          250
                                                 15.9
                                                               5.816E-03
                 76.4
                                                         70.5
  300
         17.8
                                                               4.023E-03
                       3.053E-03
                                          300
                                                 13.9
                 77.6 2.151E-03
                                                         69.3
  350
         13.2
                                          350
                                                 15.0
                                                               2.974E-03
                                                  7.5
                                                         73.3
                                          400
                                                               2.268E-03
                                          450
                                                  8.4
                                                         71.3
                                                               2.012E-03
                                          500
                                                 22.4
                                                         61.1
                                                               1.163E-03
SPEC. NAME: 19794-20.1 Site 4
                                       SPEC. NAME: 19794-21.1a Site 4
FIELD
        DECL.
                INCL.
                          MOMENT
                                       FIELD
                                                DECL.
                                                       INCL.
                                                                  MOMENT
                 37.4
                                            0
                                                               1.562E-02
    0
        275.5
                       1.469E-02
                                                 31.2
                                                         65.9
                                                               1.493E-02
   25
        280.8
                 38.4
                       1.350E-02
                                           25
                                                 20.9
                                                         68.1
   50
        283.0
                 38.4
                       1.211E-02
                                           50
                                                 20.3
                                                         69.5
                                                               1.353E-02
   75
        284.0
                 43.3
                       9.743E-03
                                           75
                                                 19.6
                                                         69.2
                                                               1.182E-02
  100
        284.4
                 44.6
                       7.631E-03
                                         100
                                                 14.8
                                                         68.7
                                                               1.017E-02
  125
        285.1
                 46.5
                       5.902E-03
                                         125
                                                 15.9
                                                         68.0
                                                               8.655E-03
  150
        285.7
                 47.7
                                                 14.9
                                                         68.1
                                                               7.525E-03
                       4.548E-03
                                         150
  175
        285.7
                 48.0
                       3.649E-03
                                         200
                                                 12.8
                                                        67.4
                                                               5.696E-03
  200
        286.3
                 48.0
                       2.891E-03
                                         250
                                                 15.3
                                                        64.7
                                                               4.331E-03
                       1.903E-03
  250
        282.8
                 49.9
                                         300
                                                 16.4
                                                         64.4
                                                               3.338E-03
  300
        289.6
                 55.6 1.252E-03
                                         350
                                                 14.5
                                                         63.9
                                                               2.665E-03
                                          400
                                                 18.8
                                                         63.4
                                                               2.156E-03
                                                 18.4
                                                         63.5
                                                               1.629E-03
                                          450
                                          500
                                                 23.4
                                                        59.9 1.353E-03
```

```
SPEC. NAME: 19794K-22.2 TH Site 6 SPEC. NAME: 19794-23.2A Site 6
                                 FIELD DECL. INCL.
TEMP
       DECL. INCL.
                      MOMENT
                    5.024E-04
                                   0
                                         12.8
                                                  75.6
                                                        3.019E-03
   0
       210.9
               83.9
       193.2
               79.3
                    4.626E-04
                                     100
                                           11.7
                                                  77.0
                                                        1.886E-03
   5
                                                        1.513E-03
   8
       190.1
               77.6
                    4.410E-04
                                    125
                                           12.5
                                                  77.4
   10
       188.6
              74.3
                    4.330E-04
                                   150
                                           10.9
                                                 75.5
                                                        1.191E-03
                                                 77.5
                                   175 357.9
  15
       182.9
              71.4
                    4.028E-04
                                                        9.363E-04
       182.5
              68.8
                                   200 13.8 82.3
                                                        7.443E-04
  20
                     3.802E-04
                                   225
                                           3.3
                                                 81.4
                                                        6.145E-04
  200
       178.1
              64.8
                     3.552E-04
                                          12.1
                                   250
                                                 80.4
                                                        5.033E-04
 300
       178.9
              64.0
                     3.120E-04
  350
       177.6
                                    275
                                          35.8
                                                  83.5
                                                        4.185E-04
              63.9
                     2.891E-04
  400
       178.5
              64.6
                    2.403E-04
                                    300
                                          46.1
                                                 82.6
                                                        3.370E-04
                                                        3.035E-04
  450
       177.4
              65.0
                    2.060E-04
                                    325
                                          68.8
                                                 82.2
                                           25.3
                                    350
                                                 82.4
                                                        2.318E-04
  475
       175.4
              64.2
                    1.888E-04
 500
                                   375
                                         280.0
                                                 88.7
                                                        2.191E-04
       175.5
              63.0
                    1.719E-04
                                   400
                                         136.0
                                                 79.0
                                                        1.863E-04
 525
       179.3
              62.3
                    1.626E-04
 550
       178.0
              61.4
                    1.491E-04
                                   425
                                         161.8
                                                  72.7
                                                        1.629E-04
                                                 80.3
                                                        1.340E-04
 575
       177.8
              60.6
                    1.473E-04
                                   450
                                         204.9
                                                        1.011E-04
  600
       172.6
                    1.274E-04
                                   475
                                         216.1
                                                 68.0
              57.6
  625
       174.0
                                   500
                                         221.8
                                                  9.4
                                                        5.646E-05
              58.9
                    1.143E-04
 650
       175.0
               60.5 8.574E-05
                                    500
                                         222.7
                                                 50.9
                                                        8.954E-05
                                                        7.470E-05
 675
       187.1
              54.1 2.858E-06
                                     525
                                          174.7
                                                  69.7
                                     550
                                           69.3
                                                  48.0
                                                        9.430E-05
                                     500
                                           195.8
                                                  64.1
                                                        5.487E-05
                                     525
                                           196.7
                                                  60.5
                                                         4.877E-05
                                                  46.2 3.761E-05
                                     550
                                           243.6
                                  SPEC. NAME: 19794-25.1 Site 6
SPEC. NAME: 19794-24.2 Site 6
TEMP
       DECL. INCL.
                      MOMENT
                                  FIELD DECL. INCL.
                                                           MOMENT
   0
              70.5
                    3.778E-03
                                   0 358.3
                                                 80.2
                                                        9.143E-04
       303.0
   5
       303.5
               70.5
                     3.414E-03
                                      25
                                          10.0
                                                 79.0
                                                        8.075E-04
                                    50 358.9
                                                 83.1
                                                        7.430E-04
  10
       302.5
               70.3 2.458E-03
                                     75
                                                        6.455E-04
                                          24.1
                                                  83.1
  200
        7.6
               73.5
                    8.236E-04
                                    100
                                           35.0
                                                 86.2
                                                        5.863E-04
 250
        34.5
              81.1
                    4.297E-04
                                                 88.2
                                    125
                                           51.8
                                                        4.942E-04
  300
       127.0
               79.4
                     2.776E-04
  350
       157.2
               79.3
                    2.477E-04
                                     150
                                         114.4
                                                 89.1
                                                         4.459E-04
                    2.276E-04
  400
        75.0
                                     200
                                          162.6
                                                  85.7
                                                        3.545E-04
               62.0
  450
       186.9
                    1.364E-04
                                     250
                                          151.9
                                                  81.1
                                                        2.896E-04
               72.0
  500
       143.6
               40.3
                    6.887E-05
                                     300
                                           149.6
                                                  79.0
                                                        2.483E-04
              46.7 4.966E-05
                                     350
                                           176.3
                                                  74.9
                                                        2.312E-04
 520
       192.6
                                                  70.3
                                     400
                                                        2.068E-04
                                           140.5
                                     450
                                           141.8
                                                  66.8
                                                        1.947E-04
                                     500
                                           137.8
                                                  80.4
                                                        2.050E-04
                                     550
                                           187.0
                                                  64.9
                                                        2.072E-04
                                     600
                                           132.2
                                                  61.5
                                                        1.777E-04
                                                  62.8 2.092E-04
                                     625
                                           190.0
```

```
SPEC. NAME: 21794-26.1 Site 6
                                   SPEC. NAME: 19794-27.3 Site 6
        DECL. INCL.
                       MOMENT
                                           DECL. INCL.
FIELD
                                   FIELD
                                                            MOMENT
   0
        333.0
               63.1 1.034E-03
                                       0
                                           353.6
                                                   65.6 2.186E-03
   25
        334.7
               61.9 9.497E-04
                                     100
                                           346.0
                                                   83.5 1.506E-03
   50
        329.9
               66.0 8.355E-04
                                     125
                                           355.1
                                                   68.3 1.455E-03
  75
        331.6
               67.6 7.653E-04
                                           351.3
                                                   68.7 1.185E-03
                                     150
 100
        333.0
               69.8 6.264E-04
                                                  68.9 9.813E-04
                                     175
                                           353.2
 125
       329.1
               75.2 5.200E-04
                                     200
                                           357.8
                                                  69.3 7.788E-04
 150
       325.4
               75.3 4.597E-04
                                     225
                                           354.6
                                                   68.9 6.619E-04
       317.3
               82.2
                     3.451E-04
                                     250
                                             4.4
                                                   72.6 5.226E-04
 200
                                                   76.0 4.444E-04
 250
        271.0
               86.3
                     2.719E-04
                                     275
                                            1.4
 300
       209.9
               86.0
                                           352.2
                                                   76.4
                                                         3.830E-04
                     2.294E-04
                                     300
  400
       181.8
               81.6 1.947E-04
                                            23.5
                                                   70.2
                                                        3.272E-04
                                     325
  500
       207.0 72.1 1.875E-04
                                            41.7
                                                   75.5 2.772E-04
                                     350
                                     375
                                             0.6
                                                   74.4 2.268E-04
                                     400
                                           268.0
                                                   32.7
                                                        1.957E-04
                                     425
                                           183.0
                                                   76.3 1.518E-04
                                                        1.325E-04
                                            19.2
                                                   62.0
                                     450
                                                   25.8 2.578E-04
                                     475
                                           202.4
                                     500
                                           118.5
                                                  53.3 9.149E-05
                                     525
                                           326.1
                                                  65.3 5.487E-05
                                     550
                                           232.4 36.6 9.101E-05
```

SPEC.	NAME: 21	794-7.1	Site 9	SPEC.	NAME: 21	794-8.2	Site 9
FIELD	DECL.	INCL.	MOMENT	FIELD	DECL.	INCL.	MOMENT
0	343.7	75.5	8.637E-03	0	342.9	67.1	1.133E-02
25	338.9	76.6	7.936E-03	25	344.6	68.7	1.015E-02
50	341.8	77.9	6.777E-03	50	339.9	67.3	9.260E-03
75	342.1	78.4	5.584E-03	75	338.4	66.9	7.671E-03
100	340.1	78.0	4.409E-03	100	337.6	68.4	6.423E-03
125	341.9	79.0	3.807E-03	150	339.6	68.5	4.478E-03
150	339.9	80.5	3.295E-03	200	340.9	71.3	3.345E-03
200	347.7	81.8	2.591E-03	250	339.6	73.8	2.523E-03
250	349.1	84.0	2.032E-03	300	338.3	77.2	1.820E-03
300	352.1	86.5	1.590E-03	400	319.6	86.0	1.038E-03
400	155.9	83.7	9.721E-04				
450	150.9	77.3	7.055E-04				
500	151.7	70.5	5.950E-04				
550	157.6	62.3	4.836E-04				
600	159.9	62.8	4.335E-04				
700	158.8	58.6	4.089E-04				

SPEC. NAME: 21794- FIELD DECL. INC	L. MOMENT FIEL  1.8 1.668E-02  1.8 1.573E-02  1.4 1.515E-02  1.5 1.385E-02  1.8 1.264E-02  1.4 1.013E-02  1.4 7.913E-03  1.5 6.170E-03  1.5 6.170E-03  1.5 1.598E-03  1.5 2.846E-03	281.6 75.4 4.034E-0 25 285.5 74.4 4.063E-0 25 288.0 74.2 4.035E-0 25 289.4 73.3 3.967E-0 290.9 72.5 3.871E-0 25 291.9 71.7 3.715E-0 292.1 70.9 3.550E-0 293.2 69.6 3.113E-0 293.4 68.6 2.611E-0 297.8 66.9 2.079E-0 298.6 62.1 8.402E-0 298.6 61.8 5.448E-0	NT 02 02 02 02 02 02 02 02 03 03 03 03
SPEC. NAME: 21794- FIELD DECL. INC. 0 292.5 45 50 294.1 57 100 288.5 67 125 293.3 65 150 297.3 66 175 294.4 67 225 296.8 71 250 282.1 73 275 275.7 68 300 277.9 70 325 268.7 57 350 255.1 64 375 223.7 58 400 234.4 73 425 348.8 61	MOMENT TEMP  1 3.452E-03  2 2.306E-03  9 1.467E-03  8 1.206E-03  1 9 8.973E-04  1 7.354E-04  20 4.466E-04  30 3.774E-04  35 2.590E-04  40 1.506E-04  47 1.506E-04  47 1.239E-04  47 1.239E-04  50 1.061E-04  51 1.061E-04  52 6.754E-05	DECL. INCL. MOMEN  182.6 71.8 1.154E-0  185.2 71.4 9.691E-0  5 177.3 70.3 8.517E-0  175.9 70.8 6.241E-0  5 174.6 70.7 4.686E-0  152.0 66.6 2.263E-0  140.8 62.8 1.963E-0  140.8 62.8 1.963E-0  140.9 59.5 1.766E-0  148.5 50.8 1.059E-0  149.3 48.7 8.232E-0  162.9 52.6 3.814E-0	NT D2 D3 D3 D3 D3 D3 D3 D3 D3 D3 D3 D3

```
SPEC. NAME: 21794-13.1 Site 5
                                    SPEC. NAME: 21794-14.3 Site 5
FIELD
        DECL.
              INCL.
                        MOMENT
                                   TEMP
                                            DECL. INCL.
                                                             MOMENT
    0
        322.5
                47.7 3.077E-02
                                       0
                                            315.6
                                                    62.0 7.151E-03
   25
               46.9 3.148E-02
                                       5
        321.4
                                            317.5
                                                    63.7 6.697E-03
   50
        321.7
               45.3 3.115E-02
                                       10 318.2 62.1 4.746E-03
   75
              44.2 3.070E-02
                                      200 321.6 61.2 4.165E~03
        321.9
  100
       321.0
              43.2 2.967E-02
                                     250 321.6 59.0 3.913E-03
  125
       321.2
              42.6 2.801E-02
                                     300 322.9 58.3 3.671E-03
  150
       320.8
              41.8 2.612E-02
                                     350
                                          323.1 57.8 3.394E-03
  175
       320.4
              41.9 2.370E-02
                                     400
                                           324.3 59.1 2.980E-03
  200
       320.9
              41.8 2.083E-02
                                     450
                                           318.6 59.3 1.961E-03
  225
        321.0
              41.2 1.825E-02
                                     500
                                           315.5 70.4
                                                         4.170E-04
  250
       320.7
               41.3 1.577E-02
                                     520
                                           233.2
                                                  71.0
                                                          2.157E-04
  300
               41.4
                                     540
                                           218.6
                                                    75.6
        321.2
                     1.175E-02
                                                         2.256E-04
  350
        323.7
               40.2 8.699E-03
                                     560
                                           213.5
                                                    67.1
                                                          1.079E-04
  400
        317.0
               40.8
                     5.900E-03
                                     580
                                           187.3
                                                    58.3
                                                          1.967E-04
  450
        326.5
               44.3 4.045E-03
                                     600
                                           196.7
                                                    43.4
                                                          1.477E-04
  500
        333.7
               35.9 3.647E-03
                                      620
                                           183.9
                                                    52.0
                                                          1.001E-04
  550
        293.2
               41.0 2.400E-03
                                      640
                                            168.7
                                                    50.6 1.002E-04
                                      660
                                            126.7
                                                    8.9 1.911E-05
                                SPEC. NAME: 21794-16.1a Site 5
FIELD DECL. INCL. MOMEN
SPEC. NAME: 21794-15.1a Site 5
       DECL. INCL. MOMENT
FIELD
                                                            MOMENT
                                            289.8
   0
        295.7
               33.9 2.254E-02
                                                   56.5
                                                         1.348E-02
                                       0
  25
               34.0 2.229E-02
                                                         1.261E-02
        295.7
                                       25
                                            295.1
                                                    55.9
               33.4 2.217E-02
   50
        294.9
                                            298.7
                                                    57.5
                                                          1.177E-02
                                       50
  75
               32.3
                     2.182E-02
                                       75
                                                    55.7
        294.4
                                            300.3
                                                          1.083E-02
  100
        294.1
               32.1
                     2.102E-02
                                     100
                                            302.5
                                                    55.1
                                                          9.742E-03
                     1.843E-02
  150
                                                          7.876E-03
        292.9
               31.3
                                      150
                                            305.0
                                                    53.0
                     1.465E-02
  200
        293.0
               30.6
                                      200
                                            304.9
                                                    49.6
                                                          5.881E-03
                     1.083E-02
  250
                                                    49.4
        293.1
               30.6
                                      250
                                            304.5
                                                          4.489E-03
  300
        292.6
               29.4
                     7.785E-03
                                      300
                                            304.8
                                                    50.1
                                                          3.494E-03
               29.6 5.413E-03
  350
        293.5
                                     400
                                            309.4
                                                    47.3
                                                          1.949E-03
  400
        293.2
               30.2
                     3.692E-03
                                      450
                                            298.1
                                                    53.4
                                                          1.408E-03
  500
        288.5
               14.1
                     2.111E-03
                                      500
                                            301.3
                                                    57.1
                                                          1.217E-03
                               SPEC. NAME: 21794-18b Site 5
FIELD DECL. INCL. MOMENT
0 313.8 56.9 1.283E-02
25 314.4 56.4 1.209E-02
50 312.6 55.0
SPEC. NAME: 21794-17b Site 5
FIELD
       DECL. INCL. MOMENT
                                                            MOMENT
   0
       352.2
              76.4 1.054E-02
                                                         1.283E-02
                                                         1.209E-02
  25
       349.6
               76.4 9.508E-03
                                     50
                                                  55.8
  50
       342.7
               74.9
                     8.251E-03
                                                          1.157E-02
  75
               73.1
                                                   55.5
       343.7
                     6.447E-03
                                      75
                                            310.8
                                                          1.003E-02
                                   100
150
200
  100
                                                   53.2
       343.1
               72.5
                     4.638E-03
                                            309.8
                                                          8.665E-03
  125
                                                   52.8
       349.5
               74.0 3.485E~03
                                            309.8
                                                          5.907E-03
                                     200
  150
       348.3
               74.7
                     2.642E-03
                                           308.8
                                                   53.0
                                                          3.845E-03
                                           307.2
               77.6 1.606E-03
                                     250
  200
       351.1
                                                   54.3
                                                          2.522E-03
               80.8 1.037E-03
                                                  57.4
                                                         1.591E-03
 250
       18.2
                                     300
                                           307.2
                                      350
                                            312.9
                                                   59.7 1.110E-03
```

```
SPEC. NAME: 12995-1.1b Site 10
                                     SPEC. NAME: 12995-2.1A Site 10
                                     FIELD
TEMP
        DECL.
               INCL.
                         MOMENT
                                             DECL.
                                                    INCL.
                                                               MOMENT
                58.0
    0
                      1.534E-04
                                        0
                                             145.0
                                                      58.0
                                                           1.220E-04
        141.1
    5
                56.8 1.460E-04
                                        25
                                             146.6
                                                      56.7
        140.2
                                                           1.193E-04
                55.6 1.359E-04
                                                      54.9 1.171E-04
   10
        139.7
                                        50
                                             147.9
                51.2 1.196E-04
                                                      53.4 1.100E-04
  200
        137.9
                                       100
                                             150.2
                                                     52.4 1.025E-04
  250
        138.5
                51.2 1.160E-04
                                       150
                                             150.7
  300
        138.9
                52.2 1.075E-04
                                       200
                                             148.3
                                                     51.4
                                                           9.183E-05
                53.4 9.949E-05
                                             152.2
                                                     50.6
  350
        139.6
                                       250
                                                           7.730E-05
  400
        140.3
                54.2 8.888E-05
                                       300
                                             153.4
                                                     50.3
                                                           6.655E-05
  450
        140.3
                57.3
                     7.560E-05
                                       350
                                             150.0
                                                     49.9
                                                           5.728E-05
  500
        139.5
                63.8
                     4.533E-05
                                       400
                                             147.5
                                                     48.7
                                                            4.489E-05
  520
        138.6
                64.4
                      4.365E-05
                                       450
                                             156.9
                                                     46.3
                                                           4.219E-05
        140.1
                66.0
                                       500
                                             147.2
                                                     46.8
  540
                      3.824E-05
                                                            4.015E-05
        140.6
                                       600
                                             142.9
                                                     46.2
  560
                67.2
                      3.660E-05
                                                           2.988E-05
        140.0
                67.1
                                       700
                                             161.5
                                                     37.8 3.600E-05
  580
                      3.434E-05
  600
        135.0
                68.4
                      3.163E-05
  620
        140.0
                67.8
                      2.875E-05
               67.5
  640
        148.3
                      2.198E-05
              -24.4 1.652E-06
  660
        112.0
                                     SPEC. NAME: 12995-4.2.2 Site 10
SPEC. NAME: 12995-3.1A Site 10
        DECL.
               INCL.
                        MOMENT
                                     FIELD
                                             DECL. INCL.
FIELD
                                                              MOMENT
    0
        135.6
                69.9 1.087E-04
                                        0
                                             119.7
                                                     73.1
                                                           6.358E-05
                                                     72.4
   25
        137.8
                69.7 1.058E-04
                                        25
                                             121.9
                                                           5.982E-05
   50
        140.4
                68.7 1.048E-04
                                        50
                                             124.3
                                                     71.5
                                                           5.795E-05
  75
        143.0
                68.2 1.026E-04
                                        75
                                             124.6
                                                     70.7
                                                           5.602E-05
                68.1 1.009E-04
                                       100
                                             126.9
                                                     70.3
                                                           5.477E-05
  100
        142.7
  150
        145.6
               67.5 9.288E-05
                                       150
                                             129.6
                                                     70.0
                                                           5.240E-05
                                                           4.795E-05
  200
        146.8
                68.7
                     8.367E-05
                                       200
                                             132.9
                                                     69.8
        144.7
  250
                69.8
                      7.542E-05
                                       250
                                             132.6
                                                     69.6
                                                           4.333E-05
  300
        155.0
                71.9
                      6.668E-05
                                       300
                                             134.7
                                                     66.8
                                                           3.755E-05
  350
        162.6
                74.6
                      6.097E-05
                                       350
                                             136.8
                                                     67.4
                                                           3.597E-05
  400
        144.7
                67.6 5.972E-05
                                       400
                                             137.8
                                                     69.1
                                                           3.364E-05
                                                           2.621E-05
  450
        169.9
                76.3 5.824E-05
                                       500
                                             131.7
                                                     58.3
                                       600
                                             137.1
                                                     68.1 3.464E-05
SPEC. NAME: 12995-5.2 Site 10
                                     SPEC. NAME: 12995-6.2 Site 10
FIELD
       DECL. INCL.
                        MOMENT
                                     FIELD
                                             DECL.
                                                    INCL.
                                                              MOMENT
                                        0
                                             200.0
                                                     73.0 7.566E-05
   0
        125.0
                83.3 1.527E-04
                                             199.2
                                                     72.8
                                                           7.542E-05
   25
        125.2
                83.4 1.526E-04
                                        25
                                             195.8
                                                     72.0
                                                           7.374E-05
   50
        128.9
                82.5 1.513E-04
                                       50
  75
        121.6
                81.7
                     1.493E-04
                                       50
                                             196.0
                                                     72.1
                                                           7.348E-05
 100
                80.2 1.471E-04
                                      100
                                             190.4
                                                     71.2
                                                           6.926E-05
       134.5
 150
       132.1
                81.8
                     1.429E-04
                                      150
                                             189.2
                                                     69.7
                                                           6.335E-05
 200
       130.9
                78.2
                     1.344E-04
                                      200
                                             187.2
                                                     69.7
                                                           5.617E-05
 250
       141.5
                79.5 1.213E-04
                                       250
                                             188.4
                                                     68.0
                                                           4.777E-05
 300
       124.0
                78.3 1.030E-04
                                       300
                                             193.7
                                                     68.3
                                                           4.123E-05
                                       350
                                             183.6
                                                     69.6 3.918E-05
 350
       106.0
                81.2 1.050E-04
                                       400
                                                     65.3
  400
       224.9
                82.6 8.932E-05
                                             187.1
                                                           2.983E-05
  450
        99.7
               61.4 6.290E-05
                                       500
                                             204.7
                                                     65.3 3.185E-05
                                       600
                                             168.3
                                                     71.1 3.514E-05
```

```
SPEC. NAME: 13996-1.2 Site 14
                                       SPEC. NAME: 13996-2.2b Site 14
FIELD
        DECL.
                INCL.
                          MOMENT
                                       FIELD
                                               DECL.
                                                      INCL.
                                                                 MOMENT
                 79.4
                      1.786E-05
    0
        321.5
                                          0
                                               328.5
                                                       85.9
                                                              1.220E-05
   25
                 78.7
                       1.429E-05
                                          25
                                               227.3
                                                       85.3
        317.6
                                                              9.598E-06
   50
                 81.8
                       1.161E-05
                                          50
                                               229.5
                                                       87.9
        311.5
                                                              8.881E-06
   75
        265.2
                 83.5
                       9.284E-06
                                          75
                                               174.3
                                                       82.5
                                                              7.304E-06
  100
        199.9
                 86.9
                       7.337E-06
                                         100
                                               132.6
                                                       80.9
                                                              6.249E-06
  125
        133.4
                 89.3
                       6.103E-06
                                         125
                                               138.1
                                                       83.3
                                                              5.717E-06
                                                              5.134E-06
  150
        268.6
                 84.0
                       5.978E-06
                                         150
                                               108.3
                                                       84.0
  200
        302.0
                 89.2
                       4.058E-06
                                         200
                                                93.7
                                                       83.4
                                                              4.834E-06
  250
                 81.3
                       3.657E-06
                                         250
        344.8
                                                92.1
                                                       83.7
                                                              4.345E-06
  400
         34.1
                 67.6 3.037E-06
                                         300
                                                71.5
                                                       82.4
                                                              4.031E-06
                                         400
                                               135.6
                                                       86.9
                                                              3.448E-06
                                         500
                                                90.8
                                                       75.5
                                                              3.317E-06
SPEC. NAME: 13996-3.2 Site 14
                                      SPEC. NAME: 13996-4.1A Site 14
        DECL. INCL. MOMENT
                                               DECL. INCL.
FIELD
                                       FIELD
                                                                MOMENT
                                          0
                                                              5.733E-04
                64.2
                      1.058E-03
                                               20.6
                                                       76.2
   0
        173.9
   25
        158.9
                 65.6
                      1.045E-03
                                          25
                                               331.6
                                                       70.8
                                                              6.076E-04
                                          50
   50
        168.9
                 61.8
                      8.009E-04
                                               326.6
                                                       82.6
                                                             4.433E-04
                                         75
                                                       79.5
   75
                 64.2
                       5.778E-04
                                               354.9
                                                              3.309E-04
        177.2
                      4.828E-04
                                         100
                                                       80.2
  100
        179.5
                 62.6
                                               304.6
                                                              2.530E-04
  125
                 63.2
                       3.733E-04
                                         125
                                               301.0
                                                       83.3
                                                              2.092E-04
        175.8
                61.9
                       2.876E-04
                                        150
                                               296.0
                                                       79.3
                                                              1.529E-04
  150
        180.1
  175
        180.4
                60.4
                       2.362E-04
                                        175
                                               259.2
                                                       77.1
                                                              1.276E-04
  200
        174.7
                 61.8
                       2.028E-04
                                         200
                                               265.1
                                                       74.3
                                                              1.144E-04
  250
        190.6
                 62.5
                      1.395E-04
                                         250
                                               247.9
                                                       67.1
                                                              7.088E-05
  300
        194.7
                 59.2
                      1.098E-04
                                         300
                                               223.9
                                                       66.9 5.454E-05
  350
        184.6
                 65.2 9.648E-05
SPEC. NAME: 13995-13.2bTH Site14
                                      SPEC. NAME: 13995-14.2aTH Site14
               INCL.
                          MOMENT
                                       TEMP
                                               DECL. INCL.
TEMP
        DECL.
                                                                 MOMENT
    0
        117.3
                70.2
                      9.302E-05
                                           0
                                               128.6
                                                       44.8
                                                             1.065E-04
    5
        119.5
                 70.7
                      9.421E-05
                                           5
                                               129.7
                                                       46.1
                                                             1.041E-04
                 70.7
                      9.096E-05
                                          10
                                               130.9
                                                       46.4
                                                             9.803E-05
   10
        121.7
                      8.398E-05
                                         200
                                               134.2
                                                       46.6
                                                             8.721E-05
   15
        122.3
                71.6
                70.8
                                         300
                                               134.0
                                                       48.4
                                                             7.613E-05
  200
        126.6
                       8.202E-05
  300
        126.4
                71.8
                       7.416E-05
                                         350
                                               135.1
                                                       51.2
                                                              6.647E-05
  350
        125.7
                72.8
                      6.733E-05
                                        450
                                               133.1
                                                       59.8
                                                             5.419E-05
                       6.412E-05
  400
                73.5
                                        475
                                               134.5
                                                       63.7
                                                             4.967E-05
        126.5
  450
                75.6
                       5.473E-05
                                        500
                                               123.3
                                                       69.0
                                                              3.630E-05
        118.5
                                        525
                                               122.2
                                                              3.547E-05
  475
        113.3
                76.9
                       4.873E-05
                                                       69.6
                78.2
                       3.679E-05
                                        550
                                               117.6
                                                       72.6
                                                              3.045E-05
  500
         90.0
  525
         81.5
                78.4
                       3.308E-05
                                        575
                                               115.0
                                                       73.1
                                                              2.810E-05
                                               112.6
  550
         50.6
                80.2
                       2.530E-05
                                        600
                                                       72.2
                                                              2.575E-05
         48.7
                79.0
                                        625
                                               115.4
                                                       69.6
                                                              2.125E-05
  575
                       2.573E-05
                                        650
  600
         57.1
                79.2
                       2.442E-05
                                               116.4
                                                       63.4
                                                              1.308E-05
                                        675
                                                       32.1 3.915E-07
                                               349.7
                78.6
  625
         58.5
                       2.183E-05
  650
         64.0
                79.7
                       1.509E-05
                54.2 1.207E-06
  675
        194.6
```

```
SPEC. NAME: 16995-17.2 Site 14
FIELD DECL. INCL. MOMENT

0 6.6 67.5 1.451E-05
25 358.6 66.5 1.375E-05
50 1.5 69.4 1.332E-05
100 3.1 67.5 1.0407
125 9.2
SPEC. NAME: 13995-15A Site 14
FIELD
         DECL. INCL.
                           MOMENT
                  84.2 1.356E-04
         229.2
    0
                         1.338E-04
   25
         219.8
                  84.2
                  82.8 1.311E-04
   50
         208.5
                  80.5 1.225E-04
  100
         190.5
                  79.4
                         1.140E-04
  150
         190.8
  200
         187.2
                  78.9
                         1.025E-04
                                            150
                                                      6.5
                                                            71.0
                                                                    8.097E-06
                                                   11.9
  300
         183.9
                  81.0 7.012E-05
                                            200
                                                            72.5
                                                                    6.616E-06
  350
         216.3
                  81.9 6.221E-05
                                            250
                                                     2.8
                                                            71.8
                                                                    5.419E-06
  400
         151.7
                  84.9 6.973E-05
                                            300
                                                     18.9
                                                            67.1
                                                                    4.325E-06
                                             400
                                                     33.8
                                                            72.3 3.752E-06
                                     SPEC. NAME: 16995-19
FIELD DECL. INCL.

0 287.7 74.1
25 289.5 74.2
50 284.5 74.7
75 289.4 73.3
100 275.6 74.8
125 277.6 75.5
150 287.4 74.7
175 280.6 74.6
200 283.4 74.9
250 282.8 73.9
300 287.7 75.1
400 295.7 73.8
SPEC. NAME: 16995-18.1 Site 14
                                                                     Site 14
        DECL. INCL. MOMENT
                                                                        MOMENT
FIELD
                                                                    1.316E-03
          4.7
                  49.1
                         2.630E-05
    0
                         1.843E-05
   25
           2.4
                  49.6
                                                                     1.292E-03
                  56.9
   50
          11.5
                         1.445E-05
                                                                     1.205E-03
                         1.014E-05
                                                                    1.126E-03
                  57.6
   75
          24.1
                         7.581E-06
                                                                    1.007E-03
  100
          25.8
                  68.0
                  72.1
                         6.584E-06
                                                                    8.794E-04
  125
          34.9
  150
         51.7
                  68.5
                         5.844E-06
                                                                    8.265E-04
                                                                    7.098E-04
  200
         38.9
                  68.1
                         4.715E-06
                  70.4
  250
         29.8
                                                                    6.375E-04
                         4.313E-06
                  68.7
  300
         54.4
                         3.345E-06
                                                                     5.183E-04
                  71.1
  350
         45.7
                         3.216E-06
                                                                     4.334E-04
         77.8
                  57.9 2.825E-06
  400
                                                                     3.091E-04
                                                  285.7
                                                             71.2
  500
        29.9
                  52.4 3.816E-06
                                             500
                                                                     2.038E-04
                                                  276.7
                                                            78.0
                                             600
                                                                    1.581E-04
                                             700
                                                            73.2 1.157E-04
                                                   297.5
                                    SPEC. NAME: 21794-20.1a Site 7
FIELD DECL. INCL. MOMENT
0 125.6 -2.1 1.044E-02
25 129.5 -5.2 1.011E-02
50 132.1 -14.5 1.064E-02
75 136.8 -21.9 1.052E-02
100 136.4 -25.1 1.020F.02
SPEC. NAME: 21794-19.1a Site 7
FIELD
       DECL. INCL. MOMENT
                                          FIELD DECL. INCL. MOMENT
                                                                    1.044E-02
                 -4.7 1.391E-02
   0
        132.2
                                                                    1.011E-02
       134.2 -12.6 1.359E-02
   25
                                         132.4 -15.4 1.282E-02
                                                                    1.064E-02
   50
   75
       131.6 -19.5 1.218E-02
                                                                    1.052E-02
  100
       132.9 -22.8 1.058E-02
                                                                    1.020E-02
       134.0 -25.5 9.180E-03
  125
                                                                    9.319E-03
                                                                    7.470E-03
  150
        132.9 -26.5
                        7.798E-03
                                                                    6.605E-03
  175
        131.8 -27.9 6.186E-03
  200
        130.7 -27.9 5.108E-03
                                                                    5.131E-03
        131.0 -28.0 3.586E-03
                                                                    4.029E-03
  250
  300
       124.7 -23.5 2.751E-03
                                           350
                                                   137.5 -38.6
                                                                   2.976E-03
  400
       132.8 -23.8 1.083E-03
                                            400
                                                   135.0 -37.7 2.148E-03
                                             500
                                                   126.8 -29.2 1.474E-03
                                             600
                                                   166.0 -55.7 7.378E-04
```

```
SPEC. NAME: 21794-21.2 Site 7
                                    SPEC. NAME: 21794-22.1a Site 7
                                     FIELD
FIELD
        DECL.
               INCL.
                         MOMENT
                                              DECL.
                                                    INCL.
                                                               MOMENT
                35.7
                      7.236E-03
                                                            5.777E-03
    0
        114.3
                                         0
                                              148.0
                                                      10.7
   25
                24.4
                                         25
                                                            7.423E-03
        117.3
                      6.479E-03
                                              148.8
                                                      4.8
   50
        125.3
                13.0
                      5.271E-03
                                        50
                                              149.2
                                                      -9.7
                                                            7.932E-03
   75
        131.3
                -6.2
                      5.009E-03
                                        75
                                              154.4
                                                    -17.8
                                                            9.077E-03
  100
        136.7
               -23.6
                       5.439E-03
                                       100
                                              153.4
                                                     -24.1
                                                            9.671E~03
  125
        138.0
               -31.5
                       5.794E-03
                                       125
                                              153.6
                                                    -28.9
                                                            1.011E-02
  150
        141.9
               -36.5
                       5.888E-03
                                       150
                                              153.6
                                                    -31.4
                                                            1.005E-02
  175
        142.6
               -39.3
                      5.934E-03
                                       175
                                              154.6
                                                    -33.1
                                                            9.666E-03
        145.0
               -42.2
  200
                      5.661E-03
                                       200
                                              153.9
                                                    -34.6
                                                            9.055E-03
  225
        145.4
               -42.8
                      5.327E-03
                                       225
                                              153.9
                                                    -35.6
                                                            8.331E-03
  250
        144.5
               -44.7
                      4.935E-03
                                       250
                                              154.7
                                                    -36.3
                                                            7.583E-03
  300
        146.2
               -46.7
                                       275
                                              153.4
                                                    -37.0
                      4.152E-03
                                                            6.691E-03
  350
        145.6
               -46.7
                                       300
                                              154.3 -37.9
                      3.276E-03
                                                            6.003E-03
  400
        142.5
               -46.8
                      2.692E-03
                                       350
                                              153.1
                                                    -37.3
                                                            4.888E-03
  450
        151.4
               -55.2
                     2.158E-03
                                       375
                                              156.1
                                                    -39.1
                                                            4.211E-03
  500
        143.3
                                       400
                                              152.8
               -42.1
                      1.256E-03
                                                    -39.8
                                                            3.583E-03
  600
              -35.1 1.230E-03
                                       425
                                              150.8
                                                    -36.9
                                                            3.385E-03
        126.2
                                       450
                                              161.9
                                                    -42.3
                                                            2.815E-03
                                        500
                                              147.7
                                                     -41.9
                                                            2.187E-03
                                                    -43.1
                                        550
                                              144.5
                                                            1.521E-03
                                        600
                                              131.8
                                                    -26.5
                                                            1.747E-03
SPEC. NAME: 21794-23.1a Site 7
                                     SPEC. NAME: 21794-24.1a Site 7
FIELD
       DECL. INCL.
                                     FIELD
                                              DECL. INCL.
                        MOMENT
                                                               MOMENT
   0
        350.3
                84.1
                     1.679E-02
                                        0
                                              317.1
                                                            9.389E-03
                                                      89.7
                                        25
                                                            8.978E-03
   25
        346.9
                85.4
                     1.517E-02
                                                7.6
                                                      88.9
   50
                84.2
                                        50
                                              180.5
                                                      87.8
                                                            7.985E-03
        358.7
                      1.294E-02
  75
                                        75
                                              154.6
                85.6
                      1.027E-02
                                                      85.4
                                                            6.575E-03
        41.1
  100
                                       100
                                              137.5
        59.0
                86.5
                      8.003E-03
                                                      81.4
                                                            5.115E-03
  125
        96.1
                84.8
                      6.125E-03
                                       125
                                             138.6
                                                      77.1
                                                            3.839E-03
  150
        99.7
                84.0
                      4.710E-03
                                       150
                                             138.0
                                                      73.2
                                                            2.990E-03
  175
       113.7
                84.6
                      3.621E-03
                                       175
                                             135.0
                                                      71.0
                                                            2.321E-03
  200
       112.3
                81.6
                      2.925E-03
                                       200
                                             133.8
                                                      69.4
                                                            1.876E-03
  250
       116.9
                81.1
                      1.915E-03
                                       225
                                              139.5
                                                      69.1
                                                            1.460E-03
  300
       116.3
                83.3 1.319E-03
                                       250
                                             125.2
                                                      69.2
                                                            1.168E-03
                                       275
                                              127.1
                                                     69.9
                                                            9.580E-04
                                       300
                                             127.0
                                                     66.6
                                                           8.057E-04
                                       325
                                             117.4
                                                    64.6 6.951E-04
```

```
SPEC. NAME: 17794-6.1b Site 2
                                   SPEC. NAME: 17794-7.1a Site 2
TEMP
       DECL. INCL.
                       MOMENT
                                    FIELD
                                            DECL. INCL.
                                                            MOMENT
                52.3 9.872E-03
    0
        283.7
                                       0
                                            269.6
                                                    5.2
                                                         4.211E-03
                29.7 9.178E-03
                                                     3.7
                                       25
    5
        286.0
                                            268.8
                                                         3.719E-03
  10
        284.8
                27.4
                     6.124E-03
                                       50
                                            268.4
                                                     5.0
                                                         3.337E-03
  200
        280.1
                14.6
                     3.852E-03
                                       75
                                            267.4
                                                    6.0
                                                         2.868E-03
  250
       273.8
                22.2
                     3.080E-03
                                      100
                                            268.6
                                                    7.0
                                                         2.422E-03
  300
       266.9
                27.6
                     2.511E-03
                                      125
                                            268.0
                                                    9.3
                                                         1.994E-03
       260.9
                                            266.8
  350
                31.4
                     2.039E-03
                                      150
                                                   11.0
                                                         1.660E-03
  450
       247.7
                40.7
                                     200
                                            267.8
                     1.622E-03
                                                   15.9
                                                         1.202E-03
  500
        243.9
                39.2
                     1.192E-03
                                      250
                                            266.1
                                                   38.7
                                                         9.039E-04
                                                   -4.4 5.474E-04
                                          235.1
  520
       232.0
                43.2
                     1.079E-03
                                      300
  540
       239.5
               42.5
                     9.091E-04
                     7.730E-04
  560
       240.0
                45.0
  580
       219.3
                15.4
                     5.863E-04
  600
       207.3
                32.6
                     3.712E-04
  620
        233.0
              -25.2
                     5.996E-05
  640
       196.3
              41.3 1.098E-04
SPEC. NAME: 17794-8.1
                       Site 2
                                    SPEC. NAME: 17794-9.2 TH Site 2
                       MOMENT
FIELD
       DECL. INCL.
                                    TEMP
                                           DECL. INCL.
                                                            MOMENT
        90.7
                                      0
                                            243.4
   0
              27.3 1.447E-02
                                                    0.3 5.362E-03
                                                    3.6 4.903E-03
                                       5
  25
         91.9
               26.3 1.313E-02
                                            243.2
                                           244.2
  50
        92.8
               26.8 1.201E-02
                                       10
                                                   10.2
                                                         4.062E-03
  75
               27.2 1.067E-02
                                      15
                                                   15.6
                                                         3.061E-03
        94.1
                                            242.4
        94.5
                                            243.3
 100
               28.1 9.440E-03
                                      20
                                                   20.0
                                                         2.269E-03
                                      200
        96.1
              29.4 8.455E-03
 125
                                           243.7
                                                   35.5
                                                         1.554E-03
 150
        97.9
              30.3
                     7.440E-03
                                     300
                                           243.3
                                                   36.9
                                                         1.230E-03
                     6.568E-03
                                     350
                                           244.7
 175
        98.3
              31.5
                                                   37.8 1.046E-03
                                                  39.2
 200
       100.4
              33.8 5.858E-03
                                     400
                                          244.8
                                                         9.400E-04
 225
       104.6
              32.4 4.912E-03
                                     450
                                          244.5
                                                  39.9
                                                         8.304E-04
 250
       100.6
              35.7
                     4.175E-03
                                     475
                                            251.9
                                                   40.9 7.263E-04
 275
        94.6
              42.6 4.165E-03
                                     500
                                            242.6
                                                  41.4 6.627E-04
  300
       117.5
               24.9 3.102E-03
                                     525
                                            242.4
                                                   42.5
                                                        6.198E-04
  325
        87.6
               45.2 2.249E-03
                                      550
                                            240.2
                                                    44.7
                                                         3.028E-04
                                                        2.262E-04
                                      575
                                            240.1
                                                   46.2
                                      600
                                            146.9 -24.5 1.791E-05
SPEC. NAME: 17794-10.2b TH Site 2
                                   SPEC. NAME: 21794-26.1a Site 2
TEMP
       DECL. INCL. MOMENT
                                    FIELD
                                            DECL. INCL.
                                                            MOMENT
   0
               -2.0 5.348E-03
                                      0
                                            30.4
                                                   27.9
                                                         2.641E-02
        50.7
               -0.4 5.247E-03
                                       25
                                                   30.8 2.307E-02
   5
         51.3
                                             33.3
  10
         51.9
                2.3 4.673E-03
                                      50
                                             33.1
                                                   36.0
                                                         2.038E-02
  15
         54.0
                5.5 3.989E-03
                                      75
                                             35.1
                                                   41.6 1.687E-02
                                     100
                                             37.2
                                                   46.1 1.331E-02
  20
         56.3
                8.2 3.299E-03
 200
         65.3
               17.4 2.129E-03
                                     125
                                             40.3
                                                   50.9
                                                         1.029E-02
                                             49.2
 300
        75.8
               23.7
                     1.621E-03
                                     150
                                                   57.3
                                                         7.707E-03
                                             48.1
 350
        82.2
               25.0
                     1.323E-03
                                      175
                                                   57.8
                                                        5.446E-03
               27.7
                     1.193E-03
  400
        89.3
                                      200
                                             55.2
                                                   62.8
                                                         4.517E-03
        87.9
               27.7
                    1.024E-03
                                      250
                                                   57.7
  450
                                             90.4
                                                         1.798E-03
                                                  59.5 1.848E-03
  475
        92.3
               27.6 9.204E-04
                                      275
                                             17.9
                     7.985E-04
 500
               26.7
        92.4
 525
       104.8
               31.6 5.824E-04
              38.6 6.992E-05
 550
       181.6
```

```
SPEC. NAME: 16995-1.2A Site 15
                                  SPEC. NAME: 16995-2.2A Site 15
FIELD
       DECL. INCL.
                       MOMENT
                                  FIELD
                                          DECL. INCL.
                                                          MOMENT
       239.9
               69.3 1.334E-05
                                          315.0
                                                  79.0
    0
                                     0
                                                       1.648E-05
                    1.341E-05
   25
               72.7
                                     25
                                                  79.7
       241.5
                                          333.7
                                                       1.608E-05
   50
       223.3
               78.7
                    1.149E-05
                                     50
                                          339.4
                                                  80.1
                                                       1.184E-05
   75
       227.4
               80.6
                    1.135E-05
                                     75
                                          325.9
                                                  80.0
                                                       1.224E-05
  100
       211.3
               78.9
                     9.854E-06
                                    100
                                          354.7
                                                  79.6
                                                       1.260E-05
  125
       185.5
               80.8
                     9.097E-06
                                    125
                                          16.1
                                                  81.4
                                                       1.027E-05
  150
       194.2
              81.1
                     8.736E-06
                                    150
                                           12.0
                                                  79.5
                                                       9.947E-06
                                                80.5
  175
       206.0
               80.4
                     8.025E-06
                                    175
                                          20.3
                                                       9.043E-06
                                                80.6
  200
       172.7
               85.5
                     7.381E-06
                                    200
                                          16.2
                                                       8.345E-06
                                           25.4
  250
        3.9
               88.1
                     6.560E-06
                                    225
                                                 80.7
                                                       7.938E-06
  300
       283.7
               81.3
                    6.462E-06
                                    250
                                           19.2
                                                  82.9
                                                       7.298E-06
                                    300
                                           39.8
                                                  79.8
                                                       6.156E-06
                                    350
                                                  75.4
                                           21.6
                                                       6.708E-06
                                    400
                                           22.3
                                                  83.9 6.072E-06
SPEC. NAME: 16995-3.1 Site 15
                                  SPEC. NAME: 16995-4.2A Site 15
TEMP
       DECL. INCL. MOMENT
                                  TEMP DECL. INCL.
                                                       MOMENT
                                   0
    0
        99.0
              79.6 1.105E-03
                                          21.6
                                                 69.5
                                                       1.405E-03
   5
        69.8
               85.1 9.867E-04
                                      5
                                          346.0
                                                  73.4 1.138E-03
   10
       127.0
              86.0
                    6.019E-04
                                     10
                                          336.6
                                                  75.1 6.765E-04
       233.2
                                         288.1
                                                  73.4
   15
             85.3 3.595E-04
                                    200
                                                       4.417E-04
       225.9 75.8 1.666E-04
                                    250
                                         256.0
                                                74.9 2.542E-04
  200
       284.0 78.5 1.325E-04
                                    300
                                                77.7 2.585E-04
  300
                                         270.3
                    1.291E-04
                                    350
                                                75.3 2.467E-04
  350
       293.6 76.2
                                         251.5
                                                 71.8 2.156E-04
  450
       248.9
              78.5
                    1.140E-04
                                    400
                                         247.7
                    1.008E-04
                                          240.3
                                                       1.951E-04
  475
       212.4
              82.0
                                    450
                                                63.4
                    8.314E-05
                                    500
                                          205.1
  500
       303.0
               81.8
                                                56.6 1.296E-04
  525
       294.7
               81.0
                     6.113E-05
                                    520
                                          227.3
                                                45.0 1.313E-04
              49.6 4.267E-05
                                                  2.2 1.560E-04
  550
       208.0
                                    540
                                          211.5
                                    560
                                          194.0
                                                  17.2 5.124E-05
                                    580
                                          215.5
                                                19.2 2.028E-05
                                    600
                                          210.6
                                                  1.1 3.035E-05
SPEC. NAME: 16995-5.1 Site 15
                                  SPEC. NAME: 16995-6.1 Site 15
FIELD
       DECL. INCL.
                      MOMENT
                                   TEMP DECL. INCL.
                                                         MOMENT
                                   0
        38.4
               25.2 7.123E-04
                                          239.9
                                                  82.0 2.152E-03
   0
        35.3
               30.9 5.214E-04
                                          236.7
                                                  77.9 1.726E-03
   25
                                      3
                                     5
   50
               48.3 3.720E-04
                                          227.9
                                                  81.4 1.376E-03
        31.2
  75
        34.6
               47.8 2.648E-04
                                    10
                                          198.8
                                                  84.5
                                                       6.955E-04
                                    200
                                         160.8
  100
        32.6
               52.9
                    1.734E-04
                                                 81.8 2.963E-04
        30.0
                                    300
                                         157.8
                                                72.9 2.382E-04
  125
              56.6
                   1.240E-04
  150
        33.6
              56.8 9.298E-05
                                   350
                                         168.1
                                                 77.7 2.244E-04
  200
        31.3
              62.0 5.479E-05
                                   450
                                         154.7
                                                 74.1 1.911E-04
  225
        37.6
              70.6 4.916E-05
                                    475
                                         175.5
                                                71.7 1.694E-04
  250
        44.0
              63.4 3.574E-05
                                    500
                                          161.7
                                                 64.3 1.609E-04
                                          157.6
  275
        14.6
             66.7 3.037E-05
                                    525
                                                66.0 1.459E-04
                                    550
                                          235.6
                                                26.5 6.069E-05
                                    575
                                                34.3 2.217E-05
                                          196.4
```

```
SPEC. NAME: 16995-20.2 Site 15
       DECL.
FIELD
               INCL.
                         MOMENT
               45.3 1.023E-03
   0
         41.7
  25
        36.5
                62.0 5.703E-04
   50
                63.5 4.915E-04
        51.3
  75
                74.8 3.562E-04
        46.7
  100
                70.5
                      2.475E-04
        60.0
 125
                74.2
        76.5
                      1.811E-04
 150
                74.8
        71.6
                      1.362E-04
 175
        68.0
               74.9
                      1.030E-04
               80.3 9.003E-05
 200
        74.1
 250
              80.7 7.610E-05
        99.7
```

SPEC.	NAME: 13	995-7.1	A Site 13
FIELD	DECL.	INCL.	MOMENT
0	191.4	-43.0	4.000E-03
100	161.0	26.5	2.128E-03
150	155.5	36.8	2.313E-03
175	153.6	44.4	1.997E-03
175	152.7	44.2	2.005E-03
200	146.8	47.5	1.759E-03
225	150.2	49.1	1.592E-03
250	151.0	48.0	1.335E-03
275	142.4	50.4	1.145E-03
300	141.1	60.5	1.413E-03
325	152.0	45.б	8.231E-04
350	131.9	60.4	6.347E-04
375	153.7	58.5	5.640E-04
400	161.7	45.9	5.909E-04
425	74.7	49.6	5.298E-04
450	153.7	69.5	3.454E-04
475	166.5	23.7	4.019E-04
500	27.6	26.7	4.234E-04
525	122.7	80.8	3.097E-04
550	154.1	16.2	5.598E-04
575	19.7	11.2	5.125E-04
600	81.0	69.7	2.469E-04
625	167.7	28.8	5.479E-04

SPEC.	NAME: 13	995-8.3	TH Site 13
TEMP	DECL.	INCL.	MOMENT
0	104.5	51.0	1.384E-02
5	104.2	52.2	1.203E-02
10	103.0	53.9	8.033E-03
15	104.6	55.6	4.916E-03
200	108.1	59.5	2.799E-03
300	106.0	60.1	2.157E-03
350	108.8	61.1	1.781E-03
400	111.4	61.9	1.485E-03
450	121.0	60.5	1.100E-03
475	125.8	61.6	1.000E-03
500	125.5	57.0	7.906E-04
525	150.5	49.9	4.785E-04
550	182.5	36.8	1.547E-04

CDEC	NIBNED - 12	005 07	Cita 12	appa	\73\67 - 11	2005 10	1- 0:5- 12
	NAME: 13	INCL.	Site 13	SPEC.			la Site 13
FIELD	DECL. 217.4	74.6	MOMENT 2.340E-02	TEMP	DECL.	INCL.	MOMENT
0 100	217.4	80.3	1.020E-02	0 5	32.3	65.8	1.976E-02
150	197.9	80.2	6.016E-03	10	31.8	66.7	1.595E-02 1.111E-02
175	210.5	81.9			33.4	69.7	
_			4.446E-03	200	41.3	73.7	5.402E-03
200	212.6	79.6	3.370E-03	250	50.5	74.7	4.362E-03
225	208.4	79.7	2.754E-03	300	58.7	76.1	3.708E-03
250	204.0	77.5	2.086E-03	350	72.0	78.0	3.148E-03
275	201.2	77.7	1.642E-03	400	93.9	77.9	2.636E-03
300	208.9	74.1	1.395E-03	450	122.5	78.1	2.052E-03
325	208.8	75.3	8.760E-04	500	149.1	77.7	1.258E-03
350	197.1	67.7	8.275E-04	520	169.0	72.3	1.157E-03
375	191.3	69.7	8.070E-04	540	182.7	79.7	5.959E-04
400	220.8	69.5	5.246E-04	560	206.3	78.1	4.223E-04
425	211.6	63.7	4.089E-04	580	192.2	29.6	2.916E-04
				600	206.6	-0.5	2.190E-04
				600	206.6	-0.5	2.190E-04
SPEC.	NAME:139	95-11.1	TH Site 13				2.190E-04 2 Site 13
SPEC. TEMP	NAME:139 DECL.	95-11.1 INCL.	TH Site 13 MOMENT				
-				SPEC.	NAME: 13	3995-12.	2 Site 13
TEMP	DECL.	INCL.	MOMENT	SPEC. FIELD	NAME: 13	8995-12. INCL.	2 Site 13 MOMENT
TEMP 0	DECL. 23.1	INCL. 51.9	MOMENT 3.887E-03	SPEC. FIELD O	NAME: 13 DECL. 57.2	3995-12. INCL. 71.0	2 Site 13 MOMENT 1.161E-04
<b>TEMP</b> 0 5	DECL. 23.1 22.6 24.4	INCL. 51.9 55.6	MOMENT 3.887E-03 3.042E-03	SPEC. FIELD 0 25	NAME: 13 DECL. 57.2 56.0	3995-12. INCL. 71.0 70.9 71.2	2 Site 13 MOMENT 1.161E-04 1.149E-04
TEMP 0 5 10	DECL. 23.1 22.6	INCL. 51.9 55.6 58.6	MOMENT 3.887E-03 3.042E-03 1.865E-03	SPEC. FIELD 0 25 50	NAME: 13 DECL. 57.2 56.0 56.8	3995-12. INCL. 71.0 70.9	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.144E-04
TEMP 0 5 10 15 200	DECL. 23.1 22.6 24.4 24.0	INCL. 51.9 55.6 58.6 59.2	MOMENT 3.887E-03 3.042E-03 1.865E-03 1.117E-03	SPEC. FIELD 0 25 50 75 100	NAME: 13 DECL. 57.2 56.0 56.8 55.1 55.9	3995-12. INCL. 71.0 70.9 71.2 71.2	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.144E-04 1.124E-04
TEMP 0 5 10 15 200 300	DECL. 23.1 22.6 24.4 24.0 25.5 33.9	INCL. 51.9 55.6 58.6 59.2 68.9 67.4	MOMENT 3.887E-03 3.042E-03 1.865E-03 1.117E-03 7.754E-04 6.280E-04	SPEC. FIELD 0 25 50 75 100 150	NAME: 13 DECL. 57.2 56.0 56.8 55.1 55.9 53.7	3995-12. INCL. 71.0 70.9 71.2 71.2 71.2 70.5	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.144E-04 1.124E-04 1.097E-04 1.026E-04
TEMP 0 5 10 15 200 300 350	DECL. 23.1 22.6 24.4 24.0 25.5 33.9 34.1	INCL. 51.9 55.6 58.6 59.2 68.9 67.4 70.2	MOMENT 3.887E-03 3.042E-03 1.865E-03 1.117E-03 7.754E-04 6.280E-04 5.024E-04	SPEC. FIELD 0 25 50 75 100 150 200	NAME: 13 DECL. 57.2 56.0 56.8 55.1 55.9 53.7 51.3	3995-12. INCL. 71.0 70.9 71.2 71.2 71.2 70.5 69.5	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.124E-04 1.097E-04 1.026E-04 9.395E-05
TEMP 0 5 10 15 200 300 350 400	DECL. 23.1 22.6 24.4 24.0 25.5 33.9 34.1 42.0	INCL. 51.9 55.6 58.6 59.2 68.9 67.4 70.2 70.0	MOMENT 3.887E-03 3.042E-03 1.865E-03 1.117E-03 7.754E-04 6.280E-04 5.024E-04 3.951E-04	SPEC. FIELD 0 25 50 75 100 150 200 250	NAME: 13 DECL. 57.2 56.0 56.8 55.1 55.9 53.7 51.3 50.8	3995-12. INCL. 71.0 70.9 71.2 71.2 71.2 70.5 69.5	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.124E-04 1.097E-04 1.026E-04 9.395E-05 8.578E-05
TEMP 0 5 10 15 200 300 350 400 450	DECL. 23.1 22.6 24.4 24.0 25.5 33.9 34.1 42.0 74.1	INCL. 51.9 55.6 58.6 59.2 68.9 67.4 70.2 70.0 49.7	MOMENT 3.887E-03 3.042E-03 1.865E-03 1.117E-03 7.754E-04 6.280E-04 5.024E-04 3.951E-04 2.739E-04	SPEC. FIELD 0 25 50 75 100 150 200 250 300	NAME: 13 DECL. 57.2 56.0 56.8 55.1 55.9 53.7 51.3 50.8 48.0	3995-12. INCL. 71.0 70.9 71.2 71.2 71.2 70.5 69.5 69.8 68.9	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.124E-04 1.097E-04 1.026E-04 9.395E-05 8.578E-05 7.541E-05
TEMP 0 5 10 15 200 300 350 400 450 475	DECL. 23.1 22.6 24.4 24.0 25.5 33.9 34.1 42.0 74.1 47.2	INCL. 51.9 55.6 58.6 59.2 68.9 67.4 70.2 70.0 49.7 75.6	MOMENT 3.887E-03 3.042E-03 1.865E-03 1.117E-03 7.754E-04 6.280E-04 5.024E-04 3.951E-04 2.739E-04 2.231E-04	SPEC. FIELD 0 25 50 75 100 150 200 250 300 350	NAME: 13 DECL. 57.2 56.0 56.8 55.1 55.9 53.7 51.3 50.8 48.0 43.7	3995-12. INCL. 71.0 70.9 71.2 71.2 71.2 70.5 69.5 69.8 68.9 65.8	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.124E-04 1.097E-04 1.026E-04 9.395E-05 8.578E-05 7.541E-05 6.320E-05
TEMP 0 5 10 15 200 300 350 400 450 475 500	DECL. 23.1 22.6 24.4 24.0 25.5 33.9 34.1 42.0 74.1 47.2 40.3	INCL. 51.9 55.6 58.6 59.2 68.9 67.4 70.2 70.0 49.7 75.6 75.6	MOMENT 3.887E-03 3.042E-03 1.865E-03 1.117E-03 7.754E-04 6.280E-04 5.024E-04 3.951E-04 2.739E-04 2.231E-04 1.863E-04	SPEC. FIELD 0 25 50 75 100 150 200 250 300 350 400	NAME: 13 DECL. 57.2 56.0 56.8 55.1 55.9 53.7 51.3 50.8 48.0 43.7 47.9	3995-12. INCL. 71.0 70.9 71.2 71.2 71.2 70.5 69.5 69.8 68.9 65.8 70.3	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.124E-04 1.097E-04 1.026E-04 9.395E-05 8.578E-05 7.541E-05 6.320E-05 5.316E-05
TEMP 0 5 10 15 200 300 350 400 450 475	DECL. 23.1 22.6 24.4 24.0 25.5 33.9 34.1 42.0 74.1 47.2	INCL. 51.9 55.6 58.6 59.2 68.9 67.4 70.2 70.0 49.7 75.6	MOMENT 3.887E-03 3.042E-03 1.865E-03 1.117E-03 7.754E-04 6.280E-04 5.024E-04 3.951E-04 2.739E-04 2.231E-04	SPEC. FIELD 0 25 50 75 100 150 200 250 300 350	NAME: 13 DECL. 57.2 56.0 56.8 55.1 55.9 53.7 51.3 50.8 48.0 43.7	3995-12. INCL. 71.0 70.9 71.2 71.2 71.2 70.5 69.5 69.8 68.9 65.8	2 Site 13 MOMENT 1.161E-04 1.149E-04 1.124E-04 1.097E-04 1.026E-04 9.395E-05 8.578E-05 7.541E-05 6.320E-05

```
SPEC. NAME: 21794-1.1a Site 8
                                      SPEC. NAME: 21794-3.1b TH Site 8
FIELD
        DECL.
               INCL.
                          MOMENT
                                       TEMP
                                              DECL. INCL.
                                                                MOMENT
                                                             1.135E-02
        187.6
                24.7
                      5.437E-03
                                              234.0
                                                       21.9
    0
                                          0
   25
                60.5
                      5.547E-03
                                              214.4
                                                       24.2
                                                             6.847E-03
        198.6
                                          5
   50
        168.3
                52.6
                      4.724E-03
                                         10
                                              196.1
                                                       19.7
                                                             4.452E-03
        169.3
                                                       17.8
   75
                46.8
                       3.638E-03
                                         15
                                              185.8
                                                             3.102E-03
  100
                46.8
                       2.561E-03
                                        200
                                              164.4
        161.9
                                                       11.4
                                                             3.201E-03
  125
        155.5
                41.6
                      1.950E-03
                                        300
                                              158.1
                                                       8.4
                                                             3.073E-03
                38.1
                       1.504E-03
  150
        157.5
                                        350
                                              159.4
                                                       4.9
                                                             2.854E-03
  175
                                              156.4
        159.1
                38.2
                       1.057E-03
                                        450
                                                        2.3
                                                             2.150E-03
  200
        154.5
                37.2
                       8.857E-04
                                        475
                                              154.8
                                                        3.6
                                                             1.793E-03
  250
        147.9
                38.2
                       5.316E-04
                                              154.5
                                                       4.1
                                        500
                                                             1.381E-03
                                        525
                                              166.6
                                                       10.7
                                                             8.891E-04
                                        550
                                              162.5
                                                       25.6
                                                            4.597E-04
                                        575
                                              214.8
                                                       8.8
                                                             1.189E-04
SPEC. NAME: 21794-4.2
                                      SPEC. NAME: 21794-5.1a Site 8
                         Site 8
FIELD
        DECL.
               INCL.
                         MOMENT
                                      FIELD
                                              DECL.
                                                     INCL.
                                                                MOMENT
    0
         53.5
                51.5
                      4.486E-03
                                          0
                                              138.3
                                                       17.5
                                                             7.263E-03
   25
         66.7
                56.3
                       5.135E-03
                                         25
                                              136.0
                                                       33.1
                                                             7.567E-03
   50
        110.2
                66.0
                       4.303E-03
                                         50
                                              141.6
                                                       34.8
                                                             6.692E-03
   75
                                         75
        114.8
                59.9
                       3.580E-03
                                              145.7
                                                       31.7
                                                             4.881E-03
  100
        130.0
                54.4
                       2.775E-03
                                        100
                                              149.7
                                                       23.6
                                                             3.652E-03
  125
        131.2
                49.1
                       2.169E-03
                                        125
                                              150.1
                                                      16.7
                                                             2.612E-03
  150
        132.1
                44.5
                       1.729E-03
                                        150
                                              152.1
                                                      14.2
                                                             2.064E-03
  175
        134.5
                42.3
                      1.428E-03
                                        175
                                              150.8
                                                      13.5
                                                             1.538E-03
  200
        132.5
                40.4
                       1.181E-03
                                        200
                                              153.2
                                                      12.4 1.126E-03
  250
        135.1
                40.4
                       8.136E-04
                                        225
                                              152.6
                                                      13.1
                                                             9.134E-04
                       6.260E-04
                                             152.3
  300
        137.9
                46.0
                                        250
                                                      14.7 6.859E-04
                48.5 3.871E-04
  350
                                        275
                                              148.7
                                                      14.8 5.712E-04
        143.7
SPEC. NAME: 21794-6.2
                         Site 8
FIELD
        DECL. INCL.
                         MOMENT
   0
        150.3
                85.6 1.116E-02
                      1.061E-02
                83.1
   25
        153.6
   50
                82.3
                      1.009E-02
        159.5
                      8.234E-03
  75
                77.9
        148.0
                      6.322E-03
  100
        154.8
                69.1
  125
                58.3
                      4.867E-03
        154.4
  150
        156.2
                46.6
                      3.945E-03
  175
        155.7
                33.4
                      3.290E-03
 200
                      2.998E-03
        157.2
                24.7
 225
        156.0
                16.6
                      2.637E-03
 250
        156.2
                10.6
                      2.356E-03
 300
        155.1
                0.4
                      1.896E-03
  350
                      1.361E-03
        151.3
                -2.9
  400
        152.3
                -4.5 1.274E-03
  500
        164.0 -28.7 6.683E-04
```

```
SPEC. NAME: 16995-22.1b Site 16
                                      SPEC. NAME: 16995-24.1a Site 16
FIELD
        DECL.
                INCL.
                          MOMENT
                                      FIELD
                                               DECL.
                                                      INCL.
                                                                 MOMENT
        337.3
                 58.6 9.620E-03
    0
                                          0
                                               199.2
                                                       28.2
                                                              1.075E-02
                      7.264E-03
   25
        353.0
                 68.2
                                         25
                                                       26.8
                                               194.4
                                                              8.086E-03
                 68.1
   50
        347.5
                       5.173E-03
                                         50
                                               199.0
                                                       33.6
                                                             5.428E-03
   75
        344.3
                 77.0
                      3.136E-03
                                         75
                                               201.8
                                                       39.0
                                                              3.477E-03
  100
                 84.2
                                               204.0
                                                       45.0
        351.6
                       2.020E-03
                                        100
                                                              2.138E-03
                                                       52.3
  125
         55.0
                 89.2
                      1.327E-03
                                               204.2
                                        125
                                                             1.400E-03
                                               203.3
  150
        194.4
                 84.9
                      9.104E-04
                                        150
                                                       56.2
                                                              9.666E-04
  175
        203.6
                85.3 6.499E-04
                                        175
                                               203.9
                                                       61.2
                                                              6.590E-04
  200
        175.4
                 83.0
                       4.928E-04
                                        200
                                               206.8
                                                       66.0
                                                              5.085E-04
  225
        191.7
                 77.8
                       3.232E-04
                                        225
                                               191.6
                                                       67.0
                                                              3.915E-04
                                                              3.485E-04
                                        250
                                               217.0
                                                       73.9
SPEC. NAME: 16995-25.2 Site 16
                                      SPEC. NAME: 16995-26.1 TH Site 16
                                               DECL.
FIELD
        DECL.
                INCL.
                          MOMENT
                                       TEMP
                                                      INCL.
                                                                 MOMENT
    0
        272.9
                 30.9
                       3.849E-03
                                          0
                                                57.4
                                                       29.8
                                                             1.132E-02
   25
        263.3
                 25.0
                       3.895E-03
                                          5
                                                68.0
                                                       26.2
                                                              9.182E-03
   50
        259.7
                 20.0
                       2.978E-03
                                         10
                                                76.9
                                                       26.6
                                                              6.160E-03
   75
        256.9
                 15.8
                       2.467E-03
                                         15
                                                86.5
                                                       27.8
                                                              3.641E-03
                                        200
  100
        253.6
                 17.4
                       1.791E-03
                                               119.6
                                                       19.4
                                                              2.499E-03
        249.1
                 17.6
  125
                       1.335E-03
                                        300
                                               136.7
                                                       18.2
                                                             1.987E-03
  150
        245.3
                18.4
                       1.052E-03
                                        350
                                               142.5
                                                       16.5
                                                             1.700E-03
  200
        225.1
                20.9
                       6.582E-04
                                        400
                                               144.5
                                                       21.3
                                                              1.432E-03
  250
        229.4
                15.6 5.218E-04
                                        450
                                               150.4
                                                       28.6
                                                              1.072E-03
                45.4 2.268E-04
  300
        308.1
                                        475
                                               159.8
                                                       19.7
                                                              8.830E-04
                                        500
                                               153.7
                                                       23.0
                                                              6.817E-04
                                               160.5
                                        525
                                                       36.2
                                                              1.667E-04
                                        550
                                              166.0
                                                       33.8
                                                             1.664E-04
```

```
SPEC. NAME:17794-11.2 Amyg Test
                                       SPEC. NAME: 17794-12.2B TH Amyg Test
FIELD
        DECL.
                INCL.
                          MOMENT
                                        TEMP
                                                DECL.
                                                       INCL.
                                                                  MOMENT
    0
         39.4
                 69.6
                       1.346E-02
                                           0
                                                120.0
                                                        58.9
                                                               1.595E-02
         48.3
                                           3
                                                102.8
                                                        65.1
                                                               1.016E-02
   50
                 63.4
                       7.824E-03
                                         200
                                                 90.2
                                                        66.7
   75
         45.0
                 62.0
                       6.009E-03
                                                               5.610E-03
         50.5
                                         250
                                                 91.0
                                                        67.0
                 53.0
                       4.776E-03
                                                               4.559E-03
  100
                                         300
                                                 86.1
                                                        65.3
  125
         52.1
                 49.4
                       4.045E-03
                                                               3.894E-03
  150
         55.0
                 44.8
                       3.475E-03
                                         350
                                                 90.2
                                                        64.8
                                                               2.981E-03
         55.5
                       2.368E-03
                                         400
                                                 96.3
                                                        64.7
                                                               2.405E-03
  175
                 23.0
                                         500
                                                 78.3
                                                        67.1
  200
         55.8
                 40.5
                       2.447E-03
                                                               1.083E-03
                                         520
                                                 76.1
  225
         53.9
                 40.0
                       2.010E-03
                                                        65.4
                                                               9.269E-04
                                                117.5
                                         540
  250
         56.8
                 40.3
                       1.647E-03
                                                        73.1
                                                               4.783E-04
                       1.091E-03
                                         560
                                                122.0
                                                        78.4
                                                               2.224E-04
  300
         58.0
                 41.7
  350
         57.3
                 47.1
                       7.167E-04
                                         580
                                                175.2
                                                        24.4
                                                               2.238E-04
                                         600
                                                208.4
                                                         9.9
                                                               3.261E-04
                                    SPEC. NAME:17794-14.1A TH Amyg Test
SPEC. NAME:17794-13.1A Amyg Test
                                        TEMP
                                                DECL.
                                                       INCL.
                                                                  MOMENT
               INCL.
                          MOMENT
FIELD
        DECL.
                                          0
                                                278.4
                                                        74.6
                                                              1.590E-02
                       1.872E-02
    0
         72.0
                 82.2
                                                294.3
                                                        69.1
                                           3
                                                              1.429E-02
   25
         79.4
                 82.0
                       1.677E-02
                       1.499E-02
                                         200
                                                292.8
                                                        66.0
                                                              9.459E-03
                 80.0
   50
         71.5
                                         250
                                                287.7
                                                        63.4
                                                              7.984E-03
   75
                 78.4
                       1.202E-02
         85.6
                                         300
                                                288.9
                                                        61.0
                                                               6.868E-03
                 76.3
                       9.748E-03
  100
         90.1
                                         350
                                                288.5
                                                        57.3
                                                              5.641E-03
  125
         95.0
                 73.9
                       7.878E-03
                                         400
                                                284.6
                                                        58.3
                                                               4.826E-03
  150
                       6.638E-03
        103.3
                70.1
                       5.525E-03
                                         500
                                                269.5
                                                        65.8
                                                               2.032E-03
  175
        102.1
                69.7
  200
                 65.5
                       4.644E-03
                                         520
                                                272.4
                                                        67.7
                                                              1.704E-03
        104.2
                                                256.3
                                                        69.0
                                                              1.375E-03
  225
        105.3
                 65.3
                       4.070E-03
                                         540
                                                        70.0
                                         560
                                                253.8
  250
        104.3
                 65.0
                       3.592E-03
                                                               6.693E-04
        103.9
                                         580
                                                218.1
                                                        37.4
                                                               6.184E-04
  300
                 63.3
                       2.920E-03
                                         600
                                                241.0
  350
                       2.202E-03
                                                        57.7
                                                               1.847E-04
        105.3
                 62.3
                       1.900E-03
  400
        108.3
                 59.3
                       1.258E-03
  450
        103.3
                 61.3
SPEC. NAME:17794-15.2 Amyg Test
                                       SPEC. NAME: 18794-1.3A TH Amyg Test
                                                DECL.
                                                       INCL.
FIELD
        DECL.
               INCL.
                          MOMENT
                                        TEMP
                                                                  MOMENT
                                                        70.6
                                           0
                                                110.2
                                                              1.355E-02
                 83.1
                       1.383E-02
    0
        115.7
        111.5
                                           3
                                                131.1
                                                        70.5
                                                              1.165E-02
                 82.9
                       1.318E-02
   25
                                         200
                                                165.3
                                                        58.7
                                                              7.322E-03
                 79.6
                       1.187E-02
   50
        136.7
                       9.922E-03
                                         250
                                                166.4
                                                        51.1
                                                               6.194E-03
   75
        144.2
                 75.4
  100
        149.7
                71.6
                       8.550E-03
                                         300
                                                167.5
                                                        43.9
                                                               5.260E-03
                 68.2
                                         350
                                                172.4
                                                        39.7
                                                               4.439E-03
  125
        149.0
                       7.288E-03
                                         400
                                                171.6
                                                        37.6
                                                               3.858E-03
                       6.378E-03
  150
        150.7
                 65.5
                                         500
                                                166.5
                                                        44.2
                                                              1.929E-03
  200
                       4.983E-03
        153.5
                 61.1
                                                169.4
                                                        43.9
                                         520
                                                              1.635E-03
  250
                 58.7
                       3.837E-03
        156.3
                                         540
                                                169.4
                                                        44.1
                                                              1.346E-03
  300
        155.0
                 58.1
                       2.957E-03
                                         560
                                                171.1
                                                        48.0
                                                              9.734E-04
  350
        155.2
                 57.3
                       2.315E-03
                                         580
                                                183.2
                                                        39.2
                                                              6.381E-04
  400
        158.7
                 59.5
                       1.822E-03
                                         600
                                                175.4
                                                        29.1
                                                               2.378E-04
  500
        152.7
                 65.1
                       1.070E-03
                                         620
                                                220.5
                                                        51.8
                                                               6.499E-05
                                                199.0
                                         640
                                                         4.8 1.582E-04
```

```
SPEC. NAME: 18794-3.3 Amyg Test
SPEC. NAME: 18794-2.1A Amyg Test
FIELD
       DECL. INCL.
                       MOMENT
                    1.490E-02
               70.4
    0
        305.5
                                      0
                                           135.4
                                                  76.6
                                                        1.322E-02
               70.9
                                          116.4
   25
        298.9
                     1.340E-02
                                      25
                                                  75.8
                                                        1.261E-02
                                    50
75
                                         137.5
                    1.205E-02
   50
        300.9
               68.6
                                                  73.2
                                                        1.049E-02
              67.4
   75
       292.5
                     1.003E-02
                                         131.8
                                                  70.0
                                                        8.649E-03
  100
              64.5
                                    100
                                         125.2
       288.4
                     8.115E-03
                                                  70.2
                                                        6.826E-03
  125
       284.0 60.9
                     6.656E-03
                                    125
                                         123.4
                                                 65.8 5.251E-03
                                    150
                                         125.4
                                                 60.5
  150
       280.0 57.8
                     5.576E-03
                                                        4.059E-03
              50.4
                                    200
                                                 53.9
                                                        2.583E-03
  200
       275.5
                     4.142E-03
                                         116.9
                                         115.7
                                                 50.2 1.691E-03
44.8 1.177E-03
       274.9
               47.3
                                    250
  250
                     3.231E-03
  300
       273.6
               44.2
                     2.526E-03
                                     300
                                          114.2
  400
        266.4
               43.3
                     1.554E-03
  500
       273.4
              36.5 9.946E-04
                               SPEC. NAME: 18794-5.1 Amyg Test
FIELD DECL. INCL. MOMENT
SPEC. NAME: 18794-4.2 Amyg Test
      DECL. INCL.
FIELD
                     MOMENT
              72.6 1.440E-02
                                                       1.340E-02
   0
       337.9
                                     0
                                          303.7
                                                  75.8
  25
       331.0
               72.4 1.366E-02
                                      25 301.4
                                                  78.1 1.232E-02
                                    50 297.5
   50
       334.8 72.0 1.192E-02
                                                  75.1 1.061E-02
  75
      333.0 71.9 9.540E-03
                                     75 288.5
                                                  76.1 8.643E-03
      330.9 70.3 7.475E-03
 100
                                    100
                                         278.8
                                                 72.9 6.412E-03
      327.3 66.9
 150
                     4.651E-03
                                    125
                                         276.4
                                                 70.2
                                                        4.893E-03
 200
       323.5 62.7
                     3.111E-03
                                    150
                                                 66.2 3.798E-03
                                         266.7
 300
       316.4 58.8 1.755E-03
                                    200
                                         265.4
                                                 62.2 2.576E-03
                                                       1.838E-03
  400
       312.0 53.0 1.067E-03
                                     250
                                          261.2
                                                  55.7
                                     300
                                           264.4
                                                  51.4 1.317E-03
                       Amyg Test SPEC. NAME: 19794-12.1A Amyg Test
SPEC. NAME: 19794-11.2A
      DECL. INCL.
                                   FIELD DECL. INCL.
                                                           MOMENT
FIELD
                        MOMENT
                    1.395E-02
                                  0
   0
       178.8
              82.6
                                         60.0
                                                 72.4
                                                       9.808E-03
       189.9
             83.2 1.362E-02
                                     25
                                                  74.0 9.738E-03
   25
                                           42.7
                                    50
75
       181.5 78.8
                    1.184E-02
                                         61.9
                                                 69.2
                                                       7.702E-03
  75
       178.4 75.5
                    1.030E-02
                                         69.3
                                                 69.1
                                                        5.590E-03
                                   100
125
150
                                         65.2
65.8
 100
       176.4 72.3 8.705E-03
                                                 64.4 4.013E-03
       172.9 67.6
 125
                    7.585E-03
                                                 63.2 3.083E-03
                                   150 67.9 62.3 2.279E-03
200 55.2 62.8 1.384E-03
250 54.3 58.7 8.988E-04
                     6.458E-03
       172.6 63.7
 150
 200
       171.9 59.0
                    5.011E-03
 250
       171.0 56.1
                     3.864E-03
 300
      169.2 55.5 2.947E-03
 400
      167.1 52.4 1.801E-03
 500
      185.9 51.5 8.798E-04
```

```
SPEC. NAME:19794-13.2 Amyg Test
                                     SPEC. NAME: 19794-14.2A
                                                               Amyq Test
FIELD
        DECL.
               INCL.
                         MOMENT
                                     FIELD
                                              DECL.
                                                     INCL.
                                                               MOMENT
    0
        290.0
                83.8
                      1.028E-02
                                         0
                                               44.3
                                                      84.5
                                                            1.359E-02
   25
        261.0
                82.0
                      1.021E-02
                                        25
                                               24.5
                                                      83.7
                                                            1.354E-03
   50
        280.1
                83.4
                      8.611E-03
                                        50
                                               43.0
                                                      83.1
                                                            1.242E-02
   75
        248.0
                83.3
                      6.811E-03
                                        75
                                               65.1
                                                      82.4
                                                            1.096E-02
  100
        214.2
                83.3
                      5.251E-03
                                       100
                                               70.3
                                                      79.6
                                                            9.371E-03
                78.4
  125
        204.3
                      4.022E-03
                                       125
                                               74.5
                                                      75.7
                                                            7.410E-03
  150
        193.4
                73.5
                      3.132E-03
                                       150
                                               78.2
                                                      70.9
                                                            5.917E-03
  200
        184.1
                65.4
                     2.026E-03
                                       200
                                               82.0
                                                      64.8
                                                            4.612E-03
                                              83.2
                                                            3.629E-03
  250
        186.5
                57.6
                     1.377E-03
                                       250
                                                      57.9
                                             84.5
                55.1
                                                      49.1
  300
        185.2
                      1.027E-03
                                       300
                                                           2.685E-03
                48.0 8.419E-04
                                            87.3
                                                     40.0 1.732E-03
  350
        169.9
                                       400
                                       500
                                              86.0
                                                      39.2 1.066E-03
SPEC. NAME: 19794-15
                      Amyg Test
FIELD
        DECL. INCL.
                         MOMENT
                75.6
   0
        340.1
                      1.220E-02
                      1.159E-02
   25
        341.4
                74.7
                      1.076E-02
   50
        342.6
                75.3
   75
        344.3
                75.7
                      9.349E-03
  100
        345.3
                75.3
                      7.962E-03
  150
        355.2
                73.8
                      5.069E-03
  200
         5.0
                70.9
                      3.093E-03
                66.6 2.059E-03
  250
         11.1
  300
         14.7
                63.8 1.729E-03
  400
         22.8
               54.2 1.019E-03
```

SPEC. FIELD	NAME: 19	794-1.4 INCL.	Tryb Test MOMENT	SPEC. TEMP	NAME: DECL		TH Tryb Test MOMENT
0	275.4	57.7	2.503E-02	0	28.	0 19.0	3.013E-02
25	276.5	57.0	2.416E-02	3	29.	5 16.0	2.978E-02
50	276.6	56.6	2.385E-02	5	30.	7 14.8	2.970E-02
75	275.9	55. <b>9</b>	2.318E-02	8	31.	1 12.8	2.953E-02
100	275.2	54.8	2.202E-02	200	33.	9 9.3	3.034E-02
125	276.2	55.4	2.085E-02	250	34.	1 8.8	3.024E-02
150	275.6	55.2	2.011E-02	300	32.	7 8.2	2.948E-02
175	276.8	54.2	1.645E-02	350	33.	8 7.5	2.705E-02
200	278.2	54.6	1.421E-02	400	34.	8 7.2	2.284E-02
225	275.0	54.2	1.116E-02	450	33.	0 6.8	1.914E-02
250	275.3	54.3	9.120E-03	500	34.	1 10.3	1.643E-03
275	274.8	52.7	7.640E-03	520	34.	7 13.8	1.126E-03
300	277.2	54.5	6.352E-03	540	44.	0 71.5	9.104E-04
350	273.4	45.7	4.632E-03	560	22.	9 19.6	2.018E-04
400	274.9	59.5	2.905E-03	580	28.	4 24.4	9.117E-05
450	274.5	38.6	2.203E-03	600	65.	3 31.5	3.546E-05

```
SPEC. NAME: 19794-4.1 Tryb Test
FIELD DECL. INCL.
SPEC. NAME: 19794-3.1 Tryb Test
        DECL.
              INCL.
                        MOMENT
                     1.285E-02
        115.5
                19.2
                                       0
                                             84.2
                                                  -44.0
                                                          9.429E-03
   25
                                       25
        114.6
                16.1
                     1.303E-02
                                             85.4
                                                  -46.3
                                                          9.925E-03
                     1.259E-02
                                       50
                                                  -48.2
   50
        114.8
               11.6
                                             88.2
                                                          1.062E-02
                                                  -49.9
   75
        114.9
                7.4
                     1.180E-02
                                      75
                                             89.8
                                                          1.053E-02
              5.3
                                     100
                                                  -51.9
  100
        114.0
                     1.028E-02
                                             91.1
                                                          9.719E-03
               4.7
                                     125
150
                                             91.5 -51.7
  125
       113.1
                     8.973E-03
                                                          9.659E-03
                                            90.0 -52.7
88.3 -51.8
                     7.336E-03
  150
       114.4
                4.2
                                                          6.669E-03
                                     175
  175
       114.6
                     5.337E-03
                4.8
                                                          5.100E-03
                                     200
  200
                                            89.2 -52.3
       114.5
                3.9 4.381E-03
                                                         4.182E-03
                                    225
250
300
  225
       113.6
               3.9
                     3.621E-03
                                            87.3 -52.1
                                                          3.433E-03
  250
      114.2
                3.4 2.980E-03
                                            90.7 -50.3
                                                         2.785E-03
                                     300
  300
      116.6
                3.1 2.200E-03
                                            90.9 -52.9
                                                         1.944E-03
                                    350
400
  350
      111.5
                                             82.9 -48.2
                5.4 1.768E-03
                                                         1.578E-03
  400
       114.4
                1.4 1.095E-03
                                             95.5 -39.4
                                                         1.145E-03
                                     450
                                             97.8 -33.5
                                                         9.302E-04
                                SPEC. NAME: 19794-6 Tryb Test
FIELD DECL. INCL. MOMEN
SPEC. NAME: 19794-5.2 Tryb Test
       DECL. INCL.
FIELD
                                                            MOMENT
                        MOMENT
                                      0
   0
        52.2
              57.2 2.764E-02
                                           167.2
                                                  76.9
                                                         2.001E-02
   25
        52.1
              57.5 2.731E-02
                                      25 168.7
                                                   76.1
                                                         1.968E-02
                                     50 170.8
   50
        52.2
             56.3 2.682E-02
                                                  74.6
                                                         1.866E-02
                                      75 168.8
  75
        51.2 55.1 2.622E-02
                                                  73.3
                                                         1.701E-02
                                   75
100
125
150
175
200
250
300
350
400
  100
        51.9 55.2 2.558E-02
                                          170.6 72.5
                                                         1.501E-02
  125
        51.7 55.2 2.378E-02
                                          173.4
                                                  71.7
                                                         1.286E-02
  150
        52.1 54.6 2.191E-02
                                          173.6
                                                  71.0
                                                         1.053E-02
  175
        52.2 54.7 1.989E-02
                                          173.7
                                                  70.9
                                                         8.661E-03
  200
        51.6 54.8 1.722E-02
                                          173.6
                                                  71.2
                                                         7.511E-03
  225
        50.1
                                          174.1
                                                  69.9
             54.7 1.519E-02
                                                         4.778E-03
  250
        52.1
                                          171.8
                                                  66.5 3.694E-03
              54.5 1.280E-02
  300
        50.8
              54.3 8.968E-03
                                          174.5
                                                  70.5 2.612E-03
                                          173.2
  350
        42.6
              50.9 7.061E-03
                                                   75.1 1.700E-03
  400
        64.6
               54.9 4.388E-03
                                     450
                                                  64.8 1.464E-03
                                          163.7
  450
        42.4
               42.8 2.416E-03
SPEC. NAME: 19794-7 Tryb Test
                                SPEC. NAME: 19794-8 Tryb Test
FIELD DECL. INCL. MOMEN
FIELD
      DECL. INCL.
                       MOMENT
                                                            MOMENT
   0
       167.6
              67.0
                                   0
                                           94.5
                                                  84.0
                                                         1.441E-02
                     2.009E-02
                                                         1.254E-02
  25
       166.6
               65.3 1.961E-02
                                      25
                                          133.5
                                                   84.4
                                    50
75
  50
               64.6 1.857E-02
                                                         9.339E-03
       165.4
                                           98.6
                                                   75.2
  75
       164.7
              63.4
                     1.741E-02
                                          106.2
                                                   73.2
                                                         6.945E-03
                                   100
125
150
175
              63.7 1.522E-02
                                          112.1
                                                   71.4
  100
       164.9
                                                         4.949E-03
 125
              63.0 1.281E-02
                                          113.6
       164.7
                                                   69.0
                                                         3.477E-03
                                                  68.4
 150
       164.3
              62.9 1.054E-02
                                          117.3
                                                        2.536E-03
 175
                                          117.0
       163.6
              63.0 8.613E-03
                                                  68.4
                                                        1.867E-03
                                    200
 200
               63.0 7.059E-03
                                          119.0
                                                  68.4 1.514E-03
       164.4
              64.5 5.868E-03
                                     225
                                          135.7 64.2 1.129E-03
 225
       163.0
               61.7 4.696E-03
 250
       164.8
 300
       170.3
               62.2 3.342E-03
 350
       160.3
               68.8 2.541E-03
  400
       160.5
               71.3 1.973E-03
```

```
SPEC NAME: 19794-9 Tryb Test
                                  SPEC. NAME: 19794-10 Tryb Test
        DECL.
              INCL.
                                    FIELD
                                            DECL.
                                                   INCL.
                        MOMENT
   0
        281.3
              -69.4 1.315E-02
                                       0
                                              9.3
                                                    60.8
                                                         1.116E-02
   25
        281.9
              -70.8 1.401E-02
                                       25
                                              4.4
                                                    56.8
                                                         1.038E-02
   50
        277.7
              -74.4 1.436E-02
                                       50
                                              8.2
                                                    54.9
                                                         8.815E-03
              ~77.7 1.508E-02
                                      75
  75
        277.3
                                              7.0
                                                    53.5
                                                          6.951E-03
  100
       274.3
              -80.6 1.515E-02
                                      100
                                              7.7
                                                          5.074E-03
                                                    51.9
  125
       275.6
              -81.7 1.488E-02
                                      125
                                              8.7
                                                   51.5 3.951E-03
       273.5
              -82.2 1.410E-02
                                             7.6
  150
                                      150
                                                   51.1
                                                         3.083E-03
  175
       277.8
              -83.3 1.313E-02
                                      175
                                              7.1
                                                   50.2 2.516E-03
  200
       280.0
              -84.2 1.193E-02
                                      200
                                             8.6
                                                   51.2 2.038E-03
                                          8.6 49.9 1.457E-03
9.1 50.9 1.075E-03
8.9 50.1 8.407E-04
  225
       283.0
              -84.3 1.064E-02
                                      250
              -84.9 9.590E-03
                                      300
  250
       285.2
  275
       283.2
              -84.4 8.333E-03
                                      350
  300
       296.9
              -84.7
                     7.238E-03
              -86.0
  350
        281.6
                     5.457E-03
  400
        288.3
              ~83.7
                     4.035E-03
              -88.3
  450
        203.1
                     2.886E-03
  500
        280.1 -80.0
                     2.459E-03
  550
        355.7 -59.1 1.652E-03
                                 SPEC. NAME: 1993-2B.1A TH Tryb Test
TEMP DECL. TNCT
SPEC. NAME: 1993-1-1A Tryb Test
       DECL. INCL.
FIELD
                        MOMENT
               65.8
                      7.708E-03
                                            310.5
                                                   -6.9 9.923E-03
   0
       151.6
                                      0
  50
                                           313.5 -17.9 9.605E-03
       136.0
               77.8 3.458E-03
                                       5
  75
               77.6 3.122E-03
                                       10
                                                   -22.2 9.050E-03
       134.5
                                           314.3
  100
       140.1
               77.8 1.790E-03
                                      15
                                            314.8
                                                   -24.1
                                                          7.016E-03
               78.5
                                      200
                                                          7.225E-03
  125
        140.9
                     1.391E-03
                                            312.7
                                                   -26.7
  150
               77.9
                                                   -27.1
        130.2
                     1.054E-03
                                      250
                                            313.4
                                                          7.348E-03
                                                   -27.7
  175
        136.7
               75.8
                     8.463E-04
                                      300
                                            313.8
                                                          7.313E-03
               77.1
                                                   -28.5
  200
        154.3
                     6.970E-04
                                      350
                                            313.8
                                                          6.932E-03
               75.1
  225
        135.5
                     5.648E-04
                                      400
                                            314.7
                                                   -28.6
                                                          6.287E-03
  250
        133.6
               70.8
                     5.239E-04
                                      450
                                            309.5
                                                   -23.8
                                                          5.792E-03
               71.0
                                     500
  275
       134.6
                     4.365E-04
                                            295.8
                                                   -21.0
                                                          7.498E-04
                                    520
               77.0
  300
                     3.503E-04
                                                   -13.9
       131.9
                                            300.3
                                                          3.800E-04
                                    540
560
580
                                                   1.6
               74.0 3.048E-04
  325
       149.4
                                            262.8
                                                         1.751E-04
              73.6 2.403E-04
  350
        153.4
                                            233.9
                                                   -7.8
                                                         6.154E-05
                                                   9.6 1.565E-04
               88.3 2.295E-04
  375
       202.4
                                            197.1
                                      600
                                            205.8
                                                    4.6 1.039E-04
```

SPEC.	NAME: 19	93-3	Tryb Test	SPEC	NAME: 19	993-4.1A	Tryb Test
FIELD	DECL.	INCL.	MOMENT	FIELD	DECL.	INCL.	MOMENT
0	116.2	-11.5	1.619E-02	0	195.9	-26.7	4.053E-03
50	112.8	-12.9	1.624E-02	50	205.7	21.6	1.844E-03
75	112.4	-14.5	1.626E-02	75	173.9	68.5	1.565E-03
100	111.3	-16.0	1.585E-02	100	72.9	80.1	1.877E-03
125	111.0	-16.6	1.522E-02	125	45.6	68.4	2.087E-03
150	110.0	-17.3	1.397E-02	150	36.8	63.2	2.136E-03
175	109.4	-17.8	1.251E-02	175	35.6	61.0	2.023E-03
200	108.9	-18.1	1.093E-02	200	33.4	59.4	1.850E-03
225	109.4	-18.5	9.235E-03	225	30.9	58.9	1.748E-03
250	108.3	-18.3	7.771E-03	250	28.8	55.5	1.597E-03
275	108.3	-18.0	6.625E-03	275	34.1	56.0	1.375E-03
300	108.7	-20.7	5.204E-03	300	30.6	57.9	1.285E-03
325	105.9	-19.1	4.247E-03	325	31.1	54.0	1.233E-03
350	105.3	-20.1	3.474E-03	350	21.9	54.8	9.672E-04
375	107.5	-18.0	3.300E-03	375	17.5	45.0	9.178E-04
400	111.8	-32.1	2.247E-03	400	54.2	54.4	6.787E-04
425	98.3	-18.1	1.854E-03	425	11.6	51.0	5.957E-04
450	108.0	-15.0	2.248E-03	450	13.4	30.7	7.893E-04
475	124.7	-56.3	1.240E-03	500	116.4	47.3	4.854E-04
SPEC.	NAME: 19	93-5.1	Tryb Test	SPEC.	NAME: 19	993-6.1A	Tryb Test
FIELD	DECL.	INCL.	MOMENT	FIELD	DECL.	INCL.	MOMENT
0	258.8	64.4	1.564E-02	0	54.9	72.2	1.621E-02
50	252.9	58.5	1.535E-02	50	112.7	76.3	1.356E-02
75	250.6	57.3	1.419E-02	75	137.2	73.9	1.266E-02
100	250.9	55.6	1.169E-02	100	143.0	73.3	1.111E-02
125	250.6	55.3	9.212E-03	125	150.2	71.8	1.010E-02
150	252.3	56.5	7.326E-03	150	156.9	71.0	9.139E-03
175	253.3	52.6	5.696E-03	175	164.0	70.5	8.295E-03
200	251.4	53.9	3.925E-03	200	169.7	72.1	6.948E-03
225	251.4	55.2	3.252E-03	225	169.0	70.4	6.187E-03
250	255.7	55.4	2.188E-03	250	174.5	72.5	4.894E-03
275	249.5	53.4	1.653E-03	275	172.4	87.2	3.830E-03
300	252.9	52.7	1.446E-03	300	164.4	67.2	3.432E-03
325	266.7	58.2	1.059E-03	325	208.8	71.9	2.488E-03
350	247.8	52.6	8.325E-04	350	355.3	63.5	2.282E-03
350 375	247.8 256.5	52.6 52.3	8.325E-04 7.598E-04	350 375 400	355.3 156.1 245.0	63.5 52.1 57.5	2.282E-03 2.222E-03 1.285E-03

```
SPEC. NAME: 18794-13.1 TH Tryb Test SPEC. NAME:18794-14.1 Tryb Test
       DECL.
              INCL.
                        MOMENT
                                    FIELD
                                            DECL. INCL.
                                                   39.4
                                                        1.195E-02
                                            188.1
   0
       218.8
              -23.1
                    2.315E-02
                                       0
                                                   38.5
                                                        1.159E-02
                     2.429E-02
              -27.1
                                       25
                                            186.3
   5
       216.1
                                      50
              -30.3
                                                   33.3
                                                         1.143E-02
  10
                                           187.8
       214.1
                     2.478E-02
                                      75
                                           188.7
                                                   29.6
                                                          1.051E-02
  15
       213.8
              -31.7 2.351E-02
                                     100
                                           190.0
                                                   26.7
                                                          9.079E-03
       210.9 -33.8 2.388E-02
  200
                                           188.8
             -34.1 2.391E-02
                                     125
                                                   25.3
                                                          7.678E-03
  250
       211.8
                                     150
                                           190.4
                                                   24.1
                                                          6.388E-03
  300
       211.9
              -34.6 2.308E-02
       211.6 -35.0 2.171E-02
                                     175
                                           190.2
                                                   24.1
                                                          5.068E-03
 350
                                     200
                                           189.8
                                                   23.5
                                                          4.226E-03
  400
       211.1
              -35.4 1.928E-02
                                                          3.407E-03
                                     225
                                           190.0
                                                   23.7
  450
       214.8
              -35.2 1.673E-02
             -34.9
                                     250
                                           189.0
                                                   23.1
                                                          2.838E-03
 500
       209.4
                     2.845E-03
                                                   25.1
                                                          1.860E-03
 520
       209.7
              -29.6 1.528E-03
                                     300
                                           189.4
                                                          1.384E-03
                                     350
                                           183.8
                                                   24.2
 540
       211.8
             -24.3 6.283E-04
                                                   23.7 9.591E-04
                                     400
                                           191.7
 560
       201.4 -23.8 2.133E-04
  580
             -9.5 2.558E-04
       196.3
              -3.3 1.653E-04
  600
       204.7
                                   SPEC. NAME:18794-16.2 Tryb Test
SPEC. NAME:18794-15.1 Tryb Test
                                   FIELD DECL. INCL.
                                                             MOMENT
       DECL. INCL.
                     MOMENT
FIELD
                                                         1.307E-02
                                      0
                                            182.9
                                                   3.7
               59.3
                     1.564E-02
   0
       297.9
                                      25
                                          182.5
                                                         1.290E-02
                                                    1.3
               60.1 1.436E-02
  25
       300.7
                                      50
                                          180.7
                                                          1.232E-02
                                                   -1.9
  50
                    1.273E-02
       297.7
               57.4
                                      75
                                           180.7
                                                   -4.7
                                                          1.093E-02
  75
               56.6 1.054E-02
       297.9
 100
              54.9
                     8.350E-03
                                     100
                                           180.2
                                                   -7.0
                                                          9.077E-03
       298.9
                                     125
                                                   -7.9
                                                          7.087E-03
  125
       296.6
              52.5 6.098E-03
                                           180.1
                                   150
175
200
225
                                           180.0
                                                   -7.9
                                                          5.539E-03
 150
       298.2
              52.7
                     4.943E-03
                                          179.7
                                                   -7.0
                                                          4.184E-03
 175
       298.5
              52.5 3.976E-03
                                                  -8.0
                                          180.4
                                                         3.362E-03
              52.5 3.288E-03
 200
       297.7
                                          179.8 -7.2 2.691E-03
 250
       299.8
              53.0 2.309E-03
                                    250 178.7 -5.5 2.288E-03
300 180.7 -10.6 1.571E-03
  300
               50.7 1.624E-03
       298.4
  350
              54.8 1.321E-03
       302.6
                                          178.6 -4.8 1.039E-03
                                      350
SPEC. NAME:18794-17.2 Tryb Test
FIELD
       DECL. INCL.
                       MOMENT
   0
        97.7
               -1.0 2.289E-02
  25
        97.8
               -2.3 2.282E-02
  50
        98.8
               -4.2 2.278E-02
  75
        98.9
               -6.1 2.206E-02
        99.1
 100
               -6.9 2.079E-02
 125
        99.2
               -7.6 1.847E-02
 150
               -8.6 1.589E-02
        98.3
 175
        97.8
               -8.7 1.314E-02
                     1.090E-02
 200
        97.9
               -8.8
 225
        97.7
               -9.4
                     8.740E-03
  250
        95.9
               -8.8
                     7.153E-03
  275
        97.3
               -8.3
                     5.784E-03
  300
        97.3
              -10.0
                     4.455E-03
                     3.100E-03
  350
        89.3
               -3.2
               -5.2 2.306E-03
  400
       100.6
             -22.4 1.332E-03
  450
        97.4
```

